


PART LIST

A	Door	G	Security wire (by others)
B	Lamps	H	Knockout plate
C	Fixture	I	Power feed BX cable (by others)
D	Tiles	J	BX connector (by others)
E	T-bar grid	K	Ballast wires
F	Security tabs	L	Wire nuts (by others)


MASTER/SATELLITE CONNECTION

Please refer to the DAY24-22-14.11.MS.INST on our website for master/satellite connection.

T-BAR STYLE MOUNTING

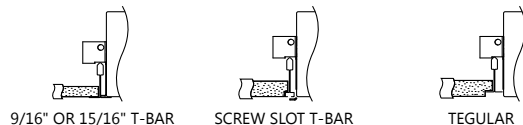


SECTION VIEW

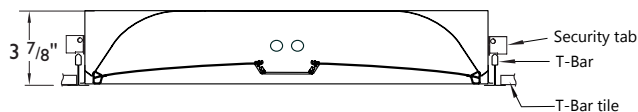


DIMENSIONS


PRODUCT	FIXTURE LENGTH	FIXTURE WIDTH	T-BAR LENGTH	T-BAR WIDTH
22 FIXTURE	23-15/16"	23-7/8"	24"	24"
24 FIXTURE	47-15/16"	23-7/8"	48"	24"
14 FIXTURE	47-15/16"	11-7/8"	48"	12"
12 FIXTURE	23-15/16"	11-7/8"	24"	12"

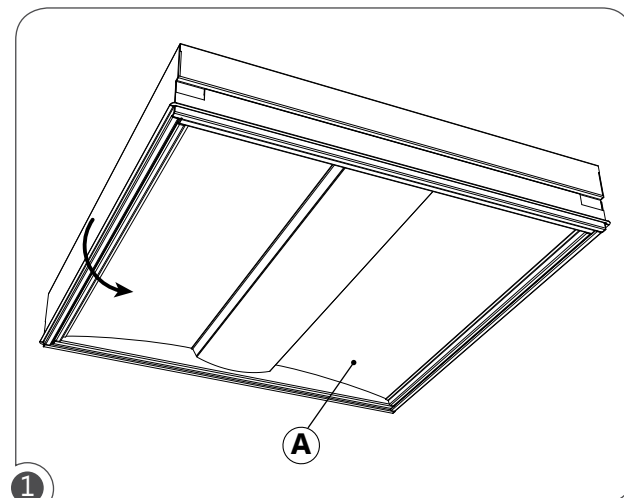


1 Ensure that the power to the fixture's circuit is turned off. Open the fixtures door (A) by pulling down on one side, marked with a white dot, to gain access to the lamp.

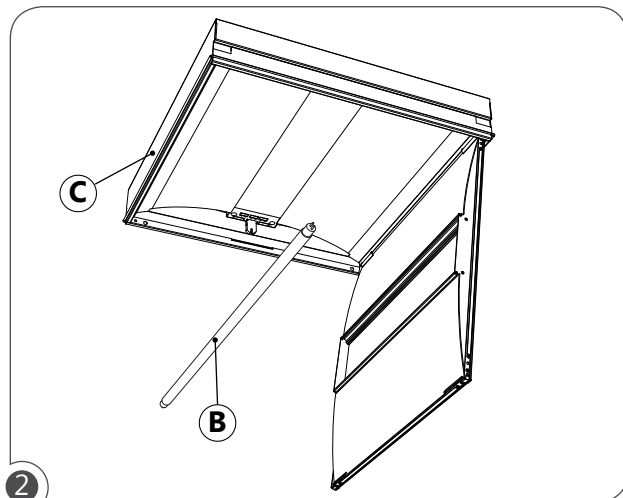

2 Remove lamps (B) if installed from the fixture (C).

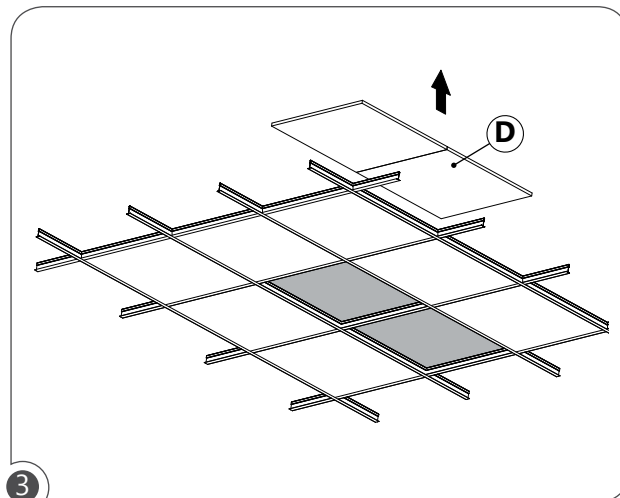

3 Remove the ceiling tiles (D) where the fixture will be installed and adjacent tiles for easy access when connecting the wires.

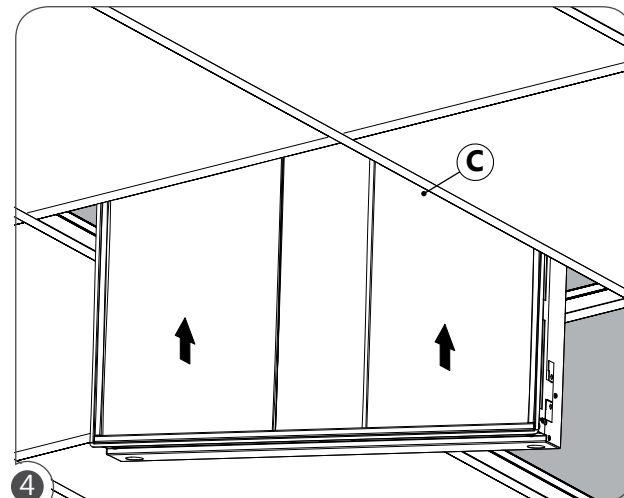


4 Close the door and insert the fixture (C) into the ceiling as shown.

WARNING:




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.




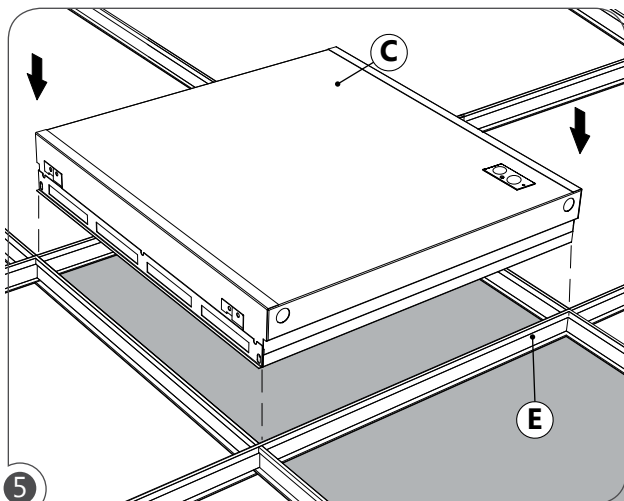


5 Set the fixture (C) into the T-bar grid (E).

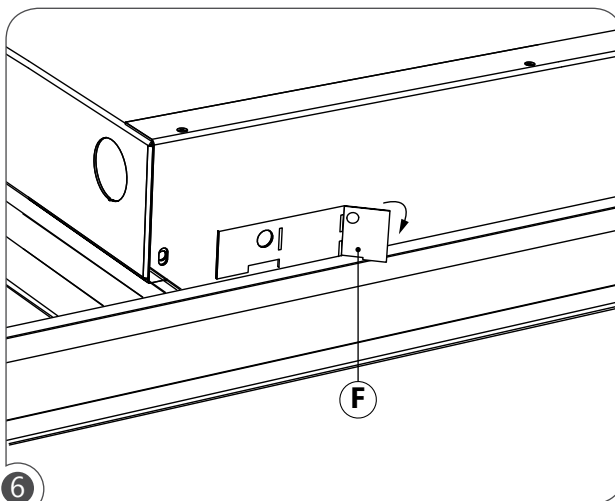


6 Based on ceiling type (tegular / screw slot T-bar or standard T-bar) bend a security tab (F) on each corner of the fixture to provide support. (SEE T-BAR STYLE MOUNTING pg.1).

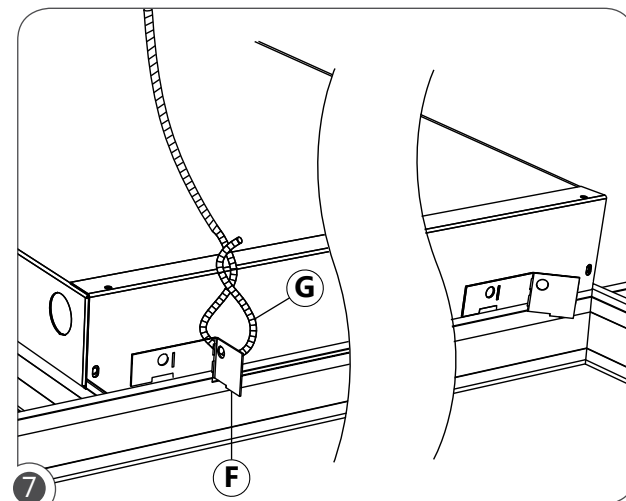


7 For additional safety a security wire (G) can be attached from the security tabs (F) to the structure above.

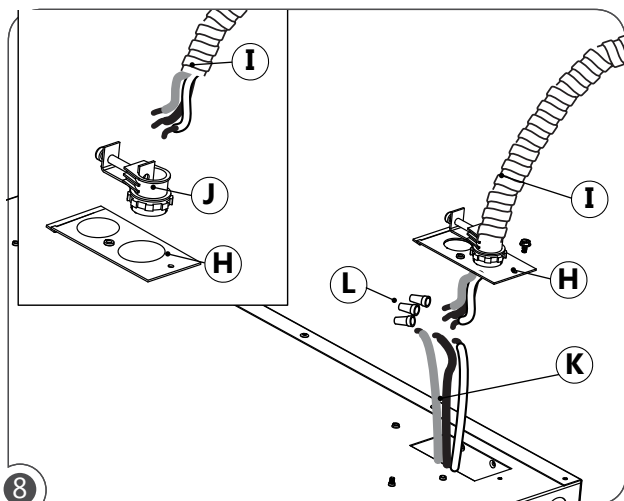

8 Remove knockout plate (H) and install BX connector (J) through the knockout plate (H). Insert BX cable (I) into BX connector (J) and fasten by tightening screw. Connect wires from BX cable (I) to wires on ballast (K) by using wire nuts (L). Ensure connections comply with local and national electrical codes.

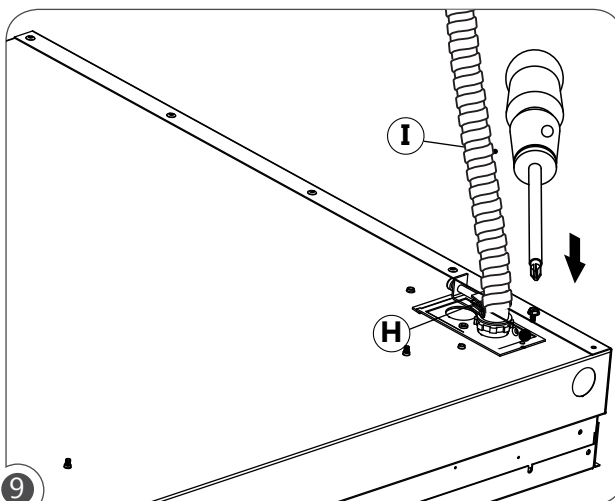

9 Push connected wires and wire nuts into fixture. Reinstall knockout plate (H) onto fixture by hooking tab into hole, and refastening screw to knockout plate (H) and fixture.

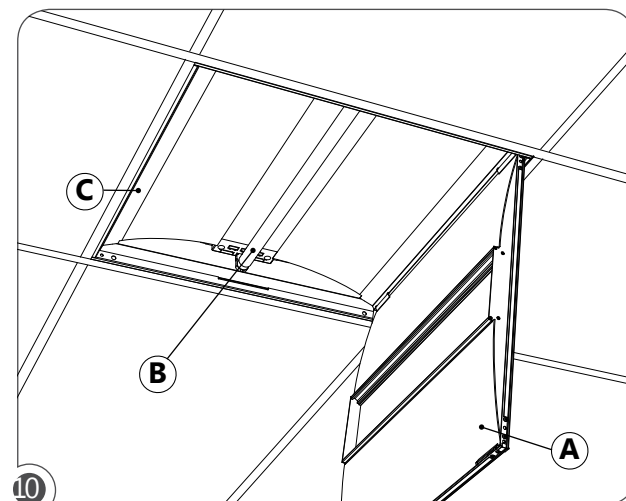

10 Reinstall lamps (B). Close the fixtures door (A). Power to the fixture (C) can now be safely turned on. Re-install the remaining tile to close the ceiling.

