

Pele (LED)**700CHPEL7_-LED****1.0****CHANDELIERS****GENERAL PRODUCT INFORMATION:**



This product is suitable for dry locations only.




This product is dimmable with a low-voltage electronic dimmer.

CAUTION — RISK OF FIRE


This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **DISCONNECT POWER TO THE ELECTRICAL BOX.**

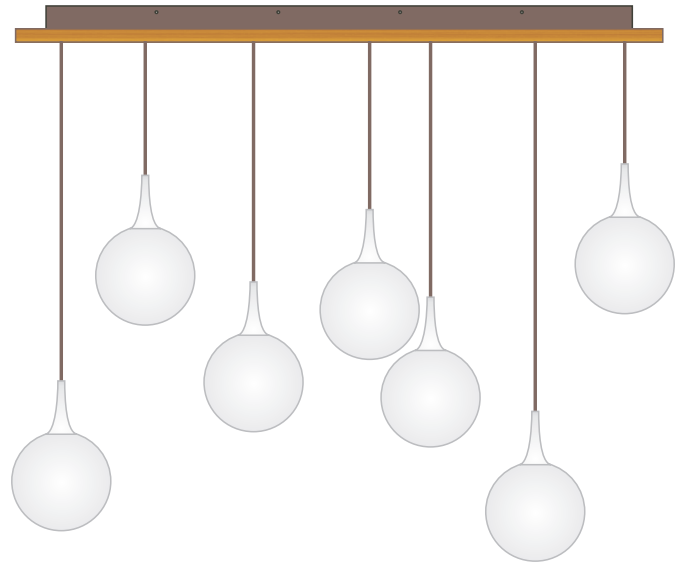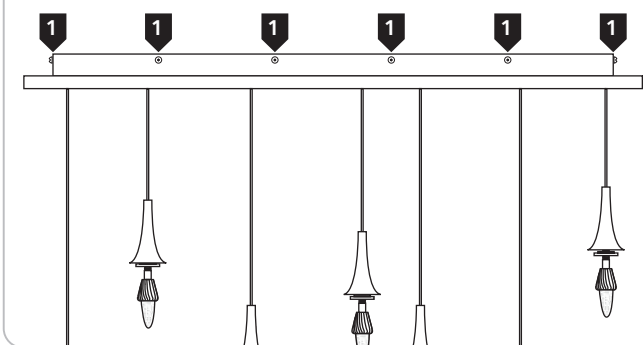**Install the Backplate****1A**

- 1** Remove all ten (10) button head screws around the chandelier canopy.

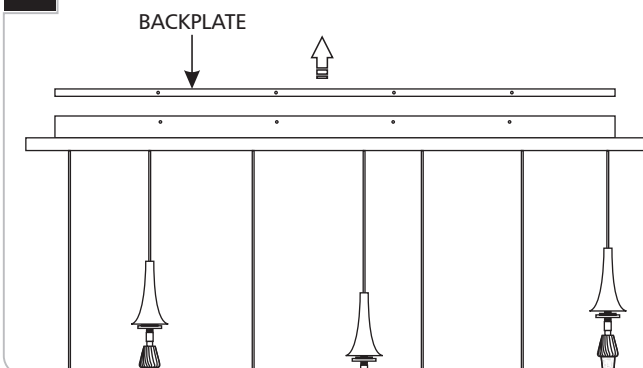1B


- 2** Lift the backplate out of the canopy.

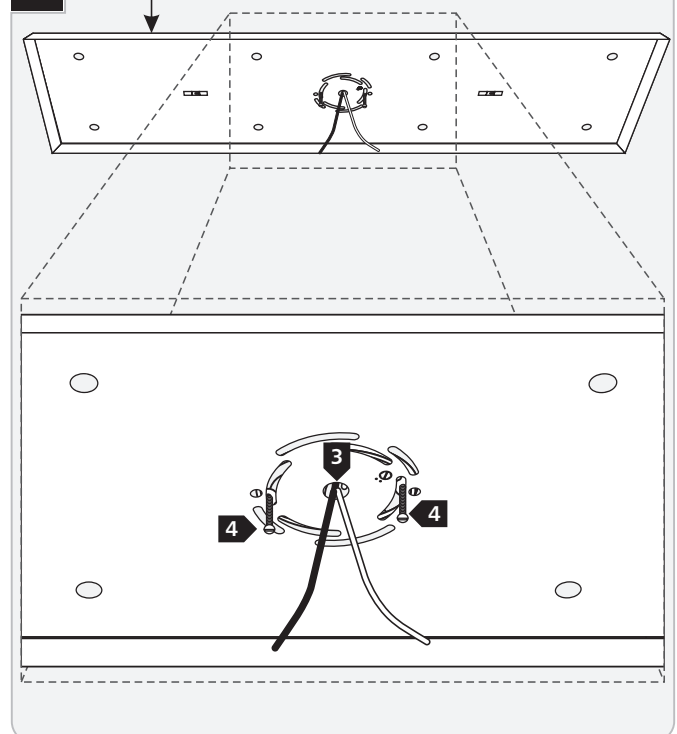1C

- 3** Feed the power line wires through the hole in the middle of the backplate.
- 4** Mount the backplate to the electrical box with the two long #8-32 screws provided.


Install the Canopy

1D

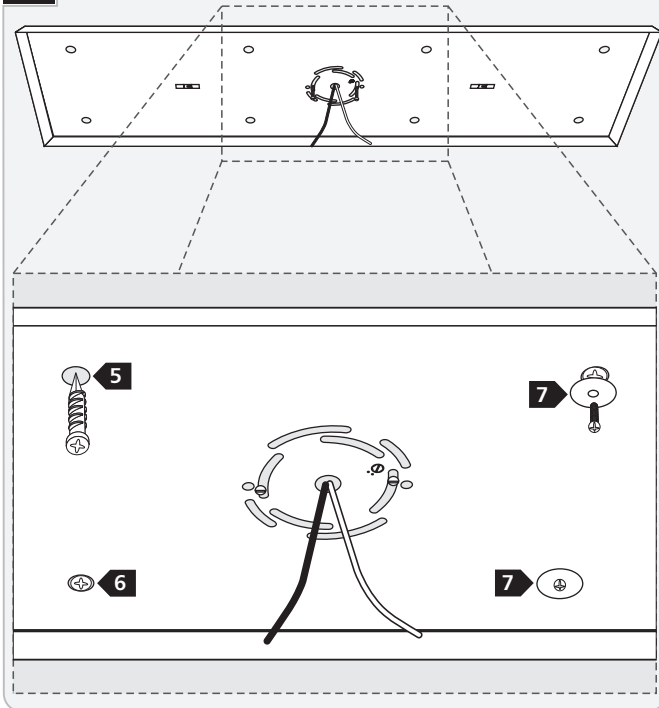


- 5 Line up an anchor with the center of a backplate hole and push the anchor in up to the threads.
- 6 Screw the anchor the rest of the way in with a screwdriver.
- 7 Secure the backplate to the anchors with the screws and washers provided.

2A

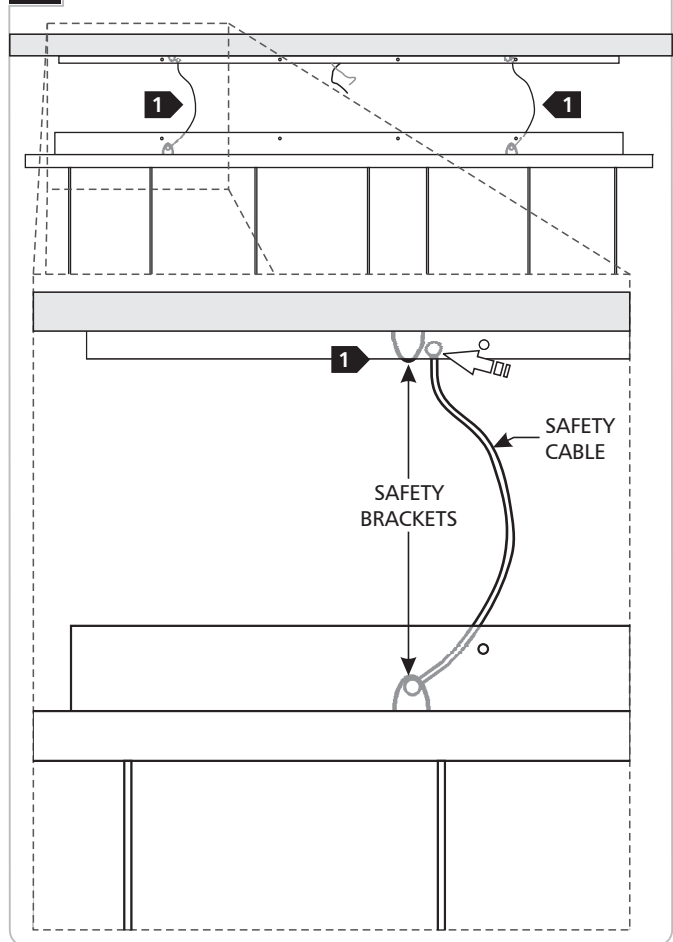


- 1 Hook a safety cable through the safety brackets on each end of the canopy and backplate.

2B

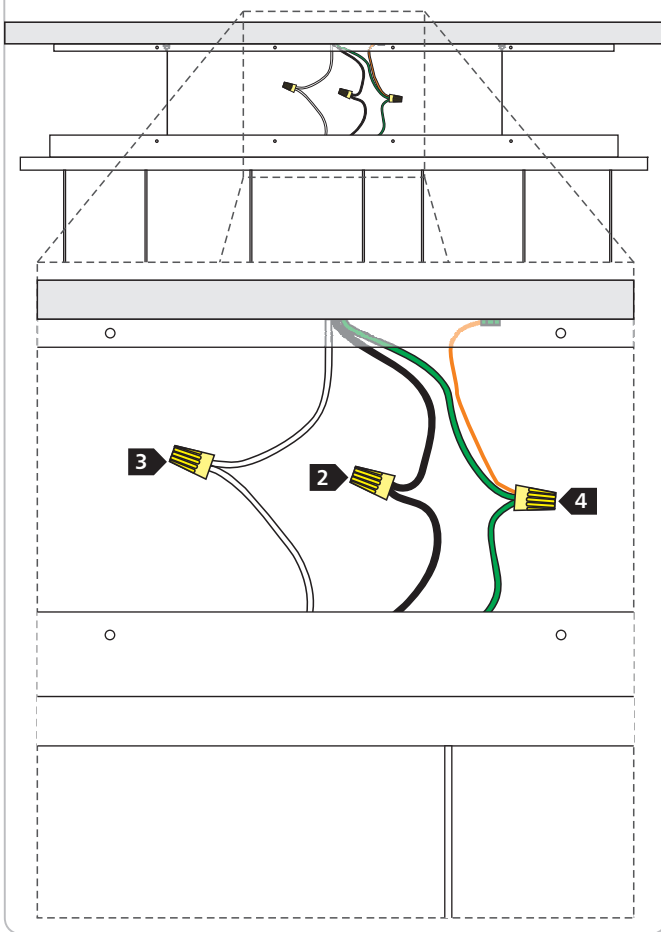

- 2 Connect the black fixture wire to the hot power line wire with a wire nut.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4 Connect the green wire and bare copper wire to a suitable ground according to local electrical codes.


2C

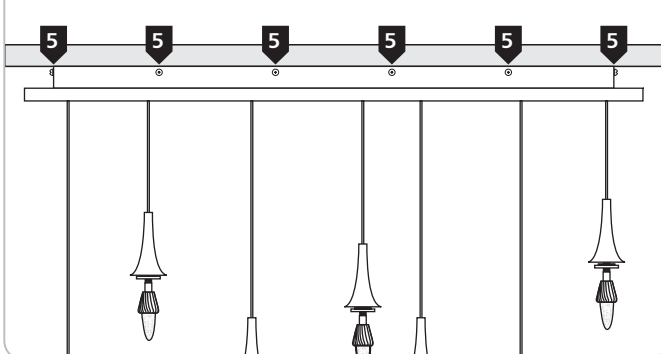

- 5 Line up the canopy with the backplate and install all ten (10) button head screws.

Install the Lamp and Glass Globe

3A

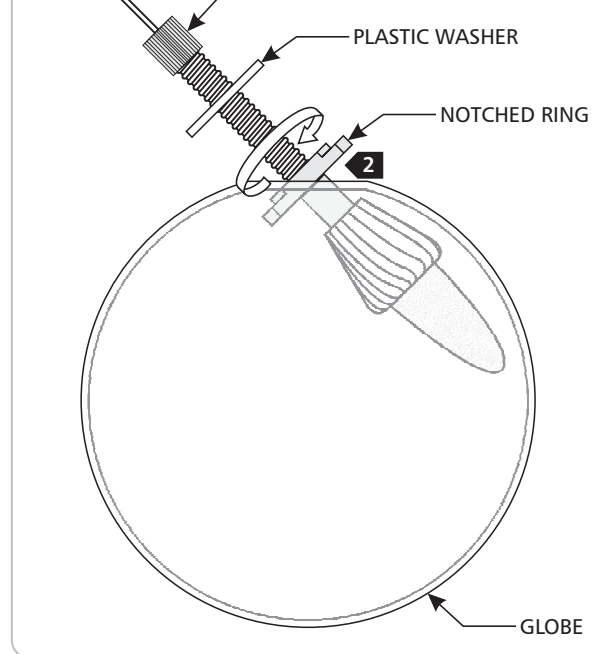


- 1 Insert the socket assembly into the globe at an angle.
- 2 Align the cut out portion of the notched ring with the edge of the opening in the globe. Rotate the socket assembly to get the notched ring into the globe, then straighten it out.
- 3 Tighten the knurled nut onto the plastic washer.

NOTE: Do not over tighten the nut. Overtightening may crack or break the glass, and cause injury.

- 4 Gently lower the glass top onto the globe.

Replacing the Lamp

4A

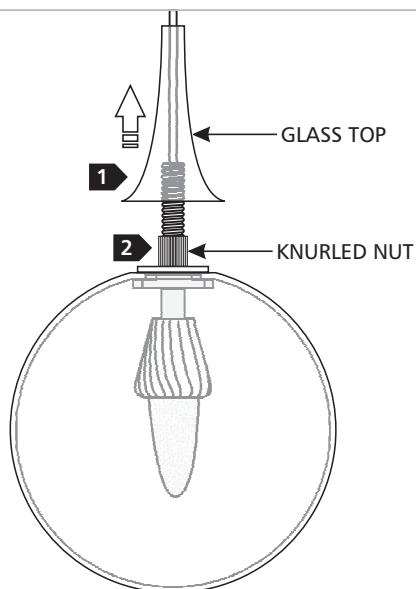


CAUTION: To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

1 Lift the glass top off of the globe.


2 Loosen the knurled nut.

4B

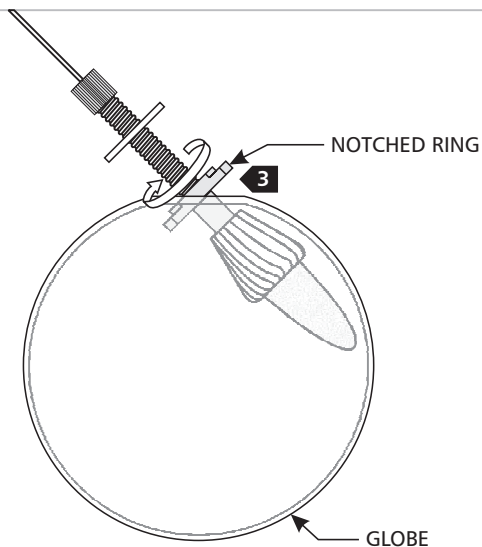

3 Tilt the socket assembly and line up the cut out portion of the notched ring with the edge of the opening in the globe. Rotate the socket assembly to get the notched ring out of the globe.

4C

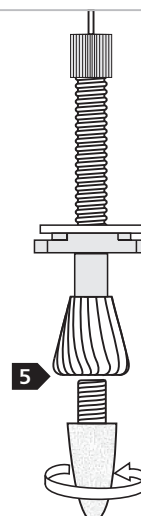

The lamp is rated at 5.8 watts at 12 volts.

4 Unscrew the old lamp.

5 Screw the new lamp into the socket.

6 Refer to section 3A, steps 1-4 to reassemble the fixture.

SAVE THESE INSTRUCTIONS!



TECH LIGHTING®

7400 Linder Ave, Skokie, IL 60077

847.410.4400

www.techlighting.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company