


JellyFish 40

LEUCOS®

INSTALLATION INSTRUCTIONS - LEUCOS SUA

JELLYFISH 40 & 50



JellyFish 50

A1 Enclosed



One installer



Save instructions

Revised
05 Nov. 08

WARNING: - DISCONNECT POWER BEFORE INSTALLATION. - FIXTURE TO BE INSTALLED BY A CERTIFIED ELECTRICIAN.- INSTALL IN ACCORDANCE WITH THE NATIONAL AND LOCAL ELECTRICAL CODES. - TAKE GREAT CARE TO AVOID SCRATCHING OR CHIPPING THE GLASS WHEN CARRYING OUT THE OPERATIONS BELOW


1. Run supply wires from standard 4" octagon recessed junction box through center of fixture "A" and mount fixture "A" to the wall or to the ceiling through slots "H"
2. Fasten fixture "A" to wall or to the ceiling through (4) holes "K".
3. Make the wire connection to the supply wires.
4. Install lamps into sockets "J" and make sure to place the fluorescent tube into clips "K". Make a working test.
5. Place the diffuser "E" in order to match the three holes to the corresponding holes "X" on structure. Secure the glass by the three thumb screws "W" and take care to place the plastic washer "P" between glass and screws as shown in Fig.2

**NOTE: 1. FIXTURE TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. FOLLOW NATIONAL ELECTRIC CODE AND ALL LOCAL CODES**

JELLYFISH 40: max 2x60W 120V E12 - G16½
max 1x22W 120V or 277V - FC9T5

JELLYFISH 50: max 2x100W 120V E26 - A19
max 1x55W 120V or 277V - FC9T5

FOR U.S.A. MARKET ONLY



MOUNTS TO STANDARD JUNCTION BOX

CIRCUIT DIAGRAM:

WHITE NEUTRAL


BLACK PHASE

GREEN-YELLOW
BARE COPPER WIRE




For additional information please contact your local dealer or **LEUCOS U.S.A.** At:
Tel. (732) 225-0010 Fax (732) 225-0250 www.leucos.com - e-mail: info@leucosusa.com

Fig. 1

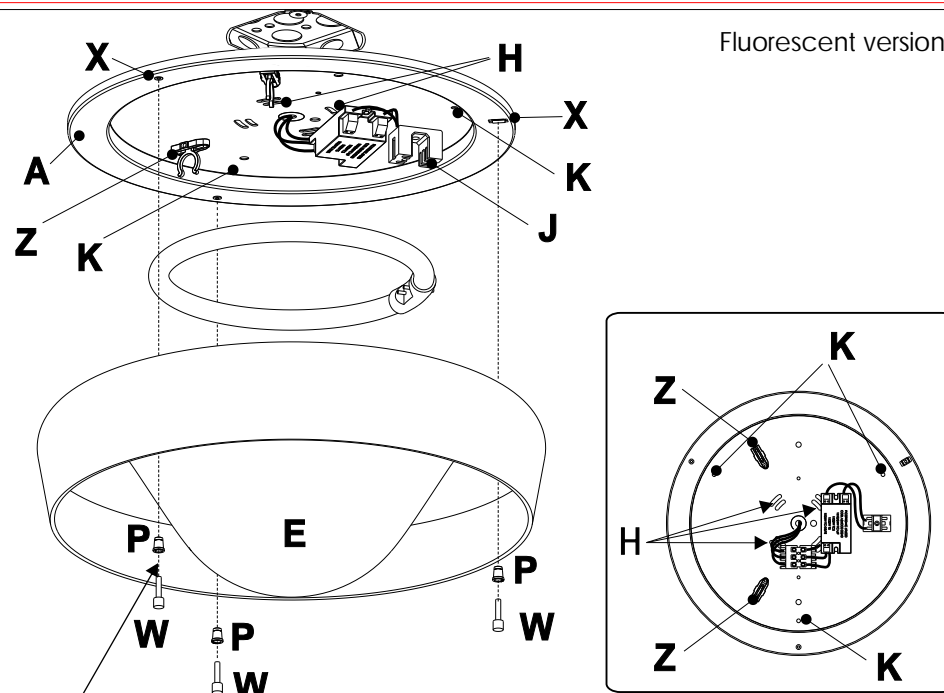

Fluorescent version

Fig. 2

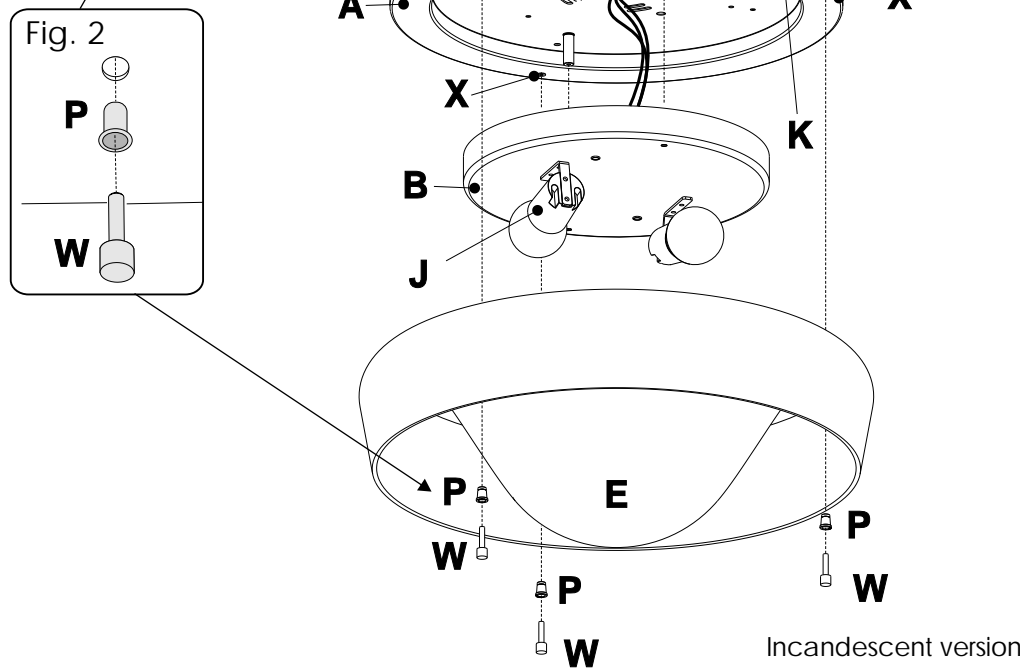

Incandescent version