

# Retro Arm Sconce & Sconce



RIW1140  
Brushed Aluminum

# 16" 24"

Stepped Trim



RIW1040  
Brushed Aluminum


# Retro Arm Sconce

RENAISSANCE


# 16"

# 24"

## Stepped Trim

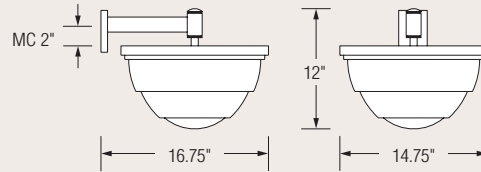

**RIW1140**

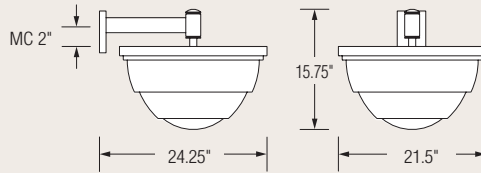

**RIW1142**

### Specifications:



- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Wall plate fits over standard junction box and is mounted to wall surface.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.



D, G, H  
Symmetrical  
Indirect

Sample model number: **RIW1142** - **1M400/1F40** - **120** - **BAL** - **HP02**

Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg. Photometry	Select Voltage	Select Finish	Select Options
16" <b>RIW1140</b>	<b>1M100PSC</b>	100W ED17 PULSE START CERAMIC MH	A E402-18R	<b>120</b> <b>277</b>	<b>PT</b> Painted. (Include Paint Number.) <b>PBR</b> Polished solid brass <b>BBR</b> Brushed solid brass <b>ABR</b> Antique solid brass <b>CPBR</b> Chrome plated polished brass <b>BAL</b> Brushed aluminum <b>ABST</b> Antique brass over steel <b>BBST</b> Brushed brass over steel <b>CPST</b> Polished chrome over steel <b>PBST</b> Polished brass over steel  <i>See Finish Selection Guide, pages 268-269.</i>	<b>F</b> Fuse option (M and F) <b>RPI</b> Remote ballast support tray <b>EMI<sup>1</sup></b> Emergency ballast(s) integral <b>EMR</b> Emergency ballast(s) remote <b>SBA</b> Sandblasted acrylic <b>SS</b> Separate switching (Not available for RIW1140.) <b>HP01</b> Silver hand-painted acrylic <b>HP02</b> Beige hand-painted acrylic <b>HP03</b> Amber hand-painted acrylic <b>FIN</b> Finial option  <i>For further detail on options, see Technical Notes on page 264.</i>
	<b>1N100</b>	100W A19 INC	B NA			
	<b>2F26</b>	(2) CFQ26W/G24q	C E402-19			
	<b>2F32</b>	(2) CFTR32W/GX24q	C E402-19			
	<b>2F42</b>	(2) CFTR42W/GX24q	C E402-19			
24" <b>RIW1142</b>	<b>1M100PSC/1F40</b>	100W ED17 PULSE START CERAMIC MH - 40W CIRC T5	D E402-17	<b>120</b> <b>277</b>	<b>PT</b> Painted. (Include Paint Number.) <b>PBR</b> Polished solid brass <b>BBR</b> Brushed solid brass <b>ABR</b> Antique solid brass <b>CPBR</b> Chrome plated polished brass <b>BAL</b> Brushed aluminum <b>ABST</b> Antique brass over steel <b>BBST</b> Brushed brass over steel <b>CPST</b> Polished chrome over steel <b>PBST</b> Polished brass over steel  <i>See Finish Selection Guide, pages 268-269.</i>	<b>F</b> Fuse option (M and F) <b>RPI</b> Remote ballast support tray <b>EMI<sup>1</sup></b> Emergency ballast(s) integral <b>EMR</b> Emergency ballast(s) remote <b>SBA</b> Sandblasted acrylic <b>SS</b> Separate switching (Not available for RIW1140.) <b>HP01</b> Silver hand-painted acrylic <b>HP02</b> Beige hand-painted acrylic <b>HP03</b> Amber hand-painted acrylic <b>FIN</b> Finial option  <i>For further detail on options, see Technical Notes on page 264.</i>
	<b>1M150PSC/1F40</b>	150W ED17 PULSE START CERAMIC MH - 40W CIRC T5	D E402-17			
	<b>1M250/1F40</b>	250W BT28 MH - 40W CIRC T5	D E402-17			
	<b>1M250PS/1F40</b>	250W ED28 PULSE START MH - 40W CIRC T5	D E402-17			
	<b>1M350PS/1F40</b>	350W ED28 PULSE START MH - 40W CIRC T5	D E402-17			
	<b>1M400/1F40</b>	400W BT28 MH - 40W CIRC T5	D E402-17			
	<b>1M400PS/1F40</b>	400W ED28 PULSE START MH - 40W CIRC T5	D E402-17			
	<b>1N300</b>	300W PS30 INC	E NA			
	<b>2T250</b>	(2) 250W T10 QTZ	F E433-75R			
	<b>2F39/1F39<sup>1</sup></b>	(2) FT39W/2G11 - FT39W/2G11	G E433-71			
	<b>4F32/1F22</b>	(4) CFTR32W/GX24q - 22W CIRC T5	H E402-20			
<b>4F42/1F22</b>	(4) CFTR42W/GX24q - 22W CIRC T5	H E402-20				

DM = Dimming ballast(s) provided

If Photometry is not available,  
consult factory for further details.

<sup>1</sup>Denotes lamping options available with EMI

### OPTICAL PACKAGES

