

Vision3[®]

lighting[®]

MR16 Sign Light **MODEL SL4**

120/277 Volt, 75 Watt Max., MR16 Halogen

Specifications:

Material: Machined 6061-T6 aluminum.

Knuckle: Rotate and Lock knuckle (protected under U.S. Patents #6,966,679 and #7,108,405) mounts the body to the stem and allows for infinite adjustability (with the fixture in the up or down position). Double taper design allows fixture to hold position during aiming and ensures a solid lock when tightened. See Model MO7 - Rotate and Lock submittal for complete specifications.

Cap: Machined caps come in three styles, lock in place with one 18-8 stainless steel set screw, and are sealed to the body with a high temperature silicone O-ring. Regressed caps have drain holes for water drainage from top of lens if mounted in the up position. All caps accept up to three internal accessories, held in place by a stainless steel clip.

Mount Canopy: Available with the following mount options: MO3 (Machined Round Canopy), MO15 (Machined Square Canopy), and MO12 (Surface Mount Powered Canopy). Stem is permanently attached to mount canopy using a 304 stainless steel threaded nipple to prevent loosening or sagging. See mount specification sheets for more information. (Mount canopy must be mounted to an appropriate wall or junction box, in such a manner that is capable of holding the weight and torque created by the fixture. Junction box and hardware not included).

Electrical: Includes an integral 75VA, 12V output, magnetic transformer with 120V or 277V, 60Hz input.


Finish: TGIC thermo set polyester powder coat paint available in 14 standard colors. Finish is applied over a corrosion resistant chromate conversion coating. Also available in one additional metal finish: Clear Anodized.

Socket: GY-6.35 porcelain socket with 600V, 250°C, PTFE coated 18 ga leads.

Lamp: 12 Volt Bi-pin MR16 halogen up to 75 watts.

Lens: Tempered, clear lens, secured to cap with a high temperature, UV curing, silicone adhesive.

Certification: CSA tested & certified to US and Canadian safety standards for the wet location wall mount use per UL1598 (Must be mounted in such a manner to properly support the fixture).

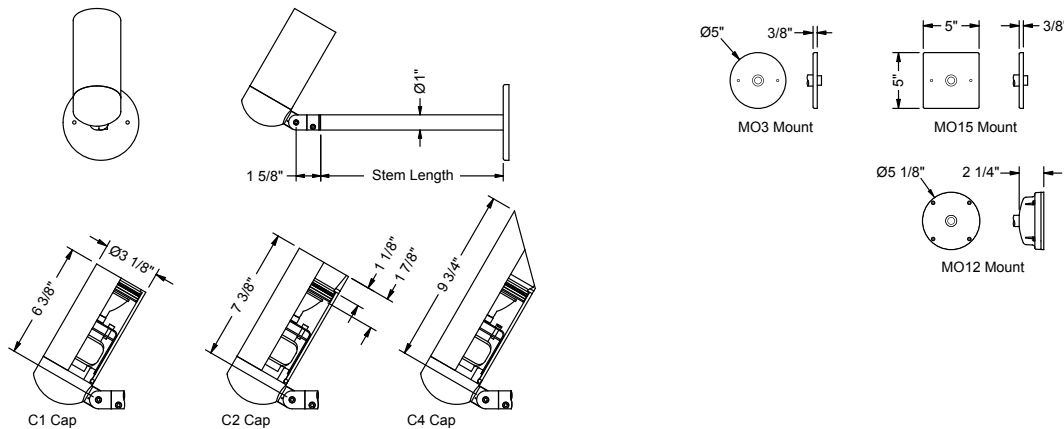

Ordering Information:

SL4A									
Model	Finish	Cap Style	Stem ¹	Mount ²	Transformer	Lamp ³	Lens Accy ³	Filter ³	Louwer
SL4A - Aluminum BL - Black		C1 - Flush	6 - 6" Stem	MO3 - Round Canopy	Input Voltage 0 - None	MR16 Halogen:	0 - None	0 - None	0 - None
BLT - Textured Black		C2 - Regress Lens	12 - 12" Stem	MO15 - Square Canopy	120 - 120 Volt Input	02 - BAB, 20W, 40° Flood	L1 - Spread Lens	F1 - Red	H1 - Honeycomb
BN - Bronze		C4 - 45° Angled	18 - 18" Stem	MO12 - Surface Mount Canopy	277 - 277 Volt Input	03 - FRB, 35W, 12° Narrow Spot	L2 - Linear Lens	F2 - Blue	Louwer
BNT - Textured Bronze			24 - 24" Stem			04 - FRA, 35W, 23° Narrow Flood	L3 - Softening Lens	F3 - Light Blue	
BAT - Textured Bark			30 - 30" Stem			05 - FMW, 35W, 40° Flood			
WI - White			36 - 36" Stem			06 - EYR, 42W, 12° Narrow Spot			
GRT - Textured Green			42 - 42" Stem			07 - EYS, 42W, 25° Narrow Flood			
SI - Silver			48 - 48" Stem			08 - EYP, 42W, 40° Flood			
GY - Grey						09 - EXT, 50W, 13° Narrow Spot			
BE - Beige						10 - EXZ, 50W, 26° Narrow Flood			
GNT - Textured Granite						11 - EXN, 50W, 40° Flood			
SAT - Textured Sand						12 - FNV, 50W, 60° Wide Flood			
PAT - Textured Patina						13 - EYF, 75W, 13° Narrow Spot			
EAT - Textured Earth						14 - EYJ, 75W, 26° Narrow Flood			
CLA - Clear Anodized						15 - EYC, 75W, 44° Flood			

Notes:

- Other stem lengths are available upon request. Consult your Vision3 Lighting sales representative.
- See MO3, MO12, or MO15 specification sheet for mount details.
- LED lamps available separately. Contact your Vision3 lighting CSR. ('Lens Accy' & 'Filter' options should not be used with LED lamps.)
- Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: **SL4A - SAT - C4 - 18 - M015 - 120 - 08 - 0 - 0 - H1**