


Features:

- Available with LED, halogen (MR16, PAR16, PAR20), metal halide (PAR20), and compact fluorescent (PAR20) lamps.1
- · Precision machined from aluminum or brass with all stainless steel hardware.
- Stem is permanently attached to a thick walled canopy to prevent 'sagging'.
- · 'Rotate & Lock' double taper knuckle features a full 360° of lockable rotational aiming.2
- Removable caps available in four cutoff styles.¹
- Each cap holds up to three accessories.
- · Various mounting canopy options allow for surface mounting or mounting on industry standard round and rectangular junction boxes.
- CSA tested & certified to US & Canadian safety standards for use in wet locations.
- Available lamp & cap style varies by model.
 Knuckle is protected under U.S. Patent #6,966,679

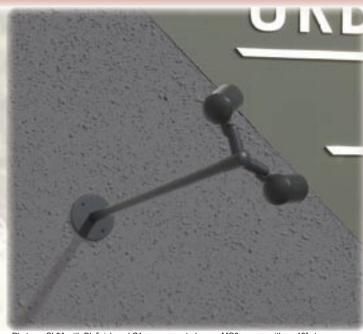

SL6A with BL finish and C1 caps, mounted on an MO3 canopy with an 18" stem.

Model SL6

Low Voltage MR16 Halogen (100W) LED (4W)

Model SL9

Line Voltage MR16 Halogen (150W) LED (4W)

Model SL7

Model SL8

Line Voltage Low Voltage PAR16 Halogen (150W) MR16 Halogen (150W) PAR20 Halogen (100W) Fluorescent (18W) **LED** (5W)

Model SL10

Metal Halide PAR20 (78W)

LED (4W)



- Dual Ø2 3/8" heads.
- Remote transformer required.



- C1 Cap Ø3 1/8" head.
- Integral magnetic transformers.

C2 Cap



- Ø3 1/8" head.
- Remote transformer required with Model SL8.
- Ballasts required with Model SL10.





Lenses & Baffles (Model AC3)

(Models MO3, MO4, & MO15) (Models MO5 & MO6)



Adjustable Cutoff Shrouds (Models AC4 & AC5)



C4 Cap

Machined Stems (Model AC1)



Electronic Transformer (Model XM3)



Magnetic Transformer (Model XM2)

Mounts:







Powered Canopy (Models MO12 & MO13)

Ballasts:





In-grade Remote Ballast

Wall Mount Remote Ballast