

LEUCOS® USA

INSTRUCTIONS FOR INSTALLATION

ALL

A1

Enclosed



One installer



Save instructions


Revised
16 - DIC. - 2002

WARNING:


- Disconnect power before installation.
- Installation in accordance with national and electrical codes.
- Follow directions carefully to avoid scratching the glass diffuser.

1. Firmly fix support "F" to the Junction Box through the holes "G" and the back plate provided.
2. **FIG.1** Join the bracket "I" to the support and fix it with screw "J".
3. **FIG.3** Connect the supply cables to the terminal block.
4. **FIG.1** Fix the reflector "L" with screw "M".
5. First insert the tubular halogen lamp in the lampholder (do not touch it, use wrapping paper given with the lamp) then insert dichroic lamp, pushing it moderately.
6. Place protective glass "Q", fix it with the spring "N" and lock it with the screws.
- GLASS HAS A SURFACE FINISH WHICH MAKES IT DELICATE AND SENSITIVE TO SCRATCHES. PLEASE HANDLE IT WITH CARE.**
7. **FIG.2** Fix the glass "H" by pressing it towards the bracket "I", to make it easier slightly roll the glass.
8. Switch the power supply on again.

WARNINGS: BEFORE SWITCHING ON THE LAMP, NORMAL USE, CHECK THE PROTECTIVE GLASS IS UNBROKEN AND IF NECESSARY REPLACE IT IMMEDIATELY.



Max power of the lamp **1x100W 120V E11 TYPE T**
Minimum distance between lamps and lit object.



Max power of the lamp **1x50W 12V GX 5.3 TYPE MR 16**
Minimum distance between lamps and lit object.

For additional information please contact your local dealer or **LEUCOS U.S.A.**
At: Tel. (732) 225-0010 Fax. (732) 225-0250

CIRCUIT DIAGRAM:



WHITE NEUTRAL
BLACK PHASE
GREEN-YELLOW BARE COPPER WIRE



MOUNTS TO STANDARD JUNCTION BOX

Fig.1

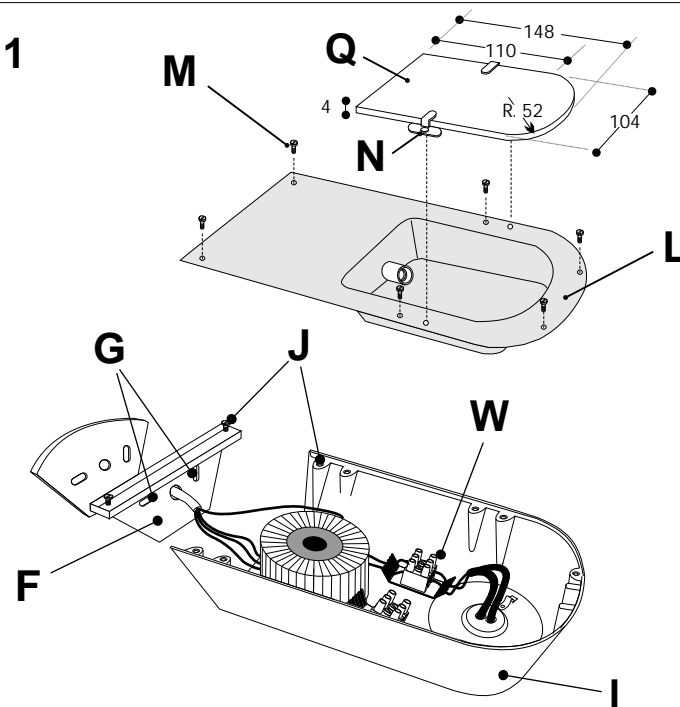


Fig.2

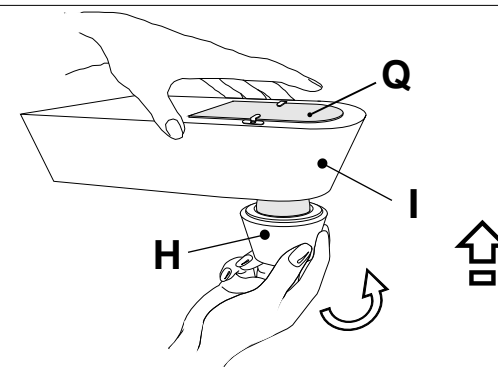


Fig.3

CIRCUIT DIAGRAM

