

**CONSTRUCTION**

- A** Pole - Made of a Ø4" (102 mm) or of a Ø5" (127 mm) tubular part, available in aluminium of round or of round fluted section and in carbon steel of round section. The pole is welded to the decorative base via a junction ring.
- B** Decorative base - Constructed of an aluminium or of a steel tube of Ø8 5/8" (219 mm) round section welded on an anchor plate. The base is provided with a decorative joint cover and base cover, composed of two moulded 356 aluminium alloy parts that are mechanically held to the tube.
- C** Access door - Made of one piece moulded aluminium and covers an opening of 5 5/8" by 11" (143 mm by 279 mm) that gives access to a copper grounding terminal. The door closes on a neoprene gasket making it waterproof.
- Anchor plate - Made of one piece moulded aluminium or a cut out steel part. The bolt circle of the plate is Ø11 1/2" (292 mm).
- Anchor bolts - There are four in all, made of galvanized steel, 'L' shaped and supplied with two nuts and two flats for each. The sizes of anchor bolts are as follow:
  - for 16' (4.88 m) and less pole heights: 3/4" by 20" long (19 mm by 508 mm long)
  - for 18' (5.49 m) and up pole heights: 3/4" by 26" long (19 mm by 660 mm long)
  - for 18' (5.49 m) and up pole heights with 5" steel section: 1" by 30" long (25 mm by 762 mm long)

**FINISH**



- All surfaces are chemically treated against corrosion through a multi-stage immersion process. The polyester powder finish is applied by a thermostatic process offering an excellent protection conforming to ASTM G7, D-2247 and B-117/D-1654 standards. Standard colours are black, bronze and white with a textured finish. Consult SDL's "Colour Selection Guide" for others.

**HARDWARE**


- All exterior hardware is made of stainless steel.

**WARRANTY**

- This product has a three year warranty on the finish and against any manufacturing defect. The ballast and its components are covered by the manufacturer's warranty.

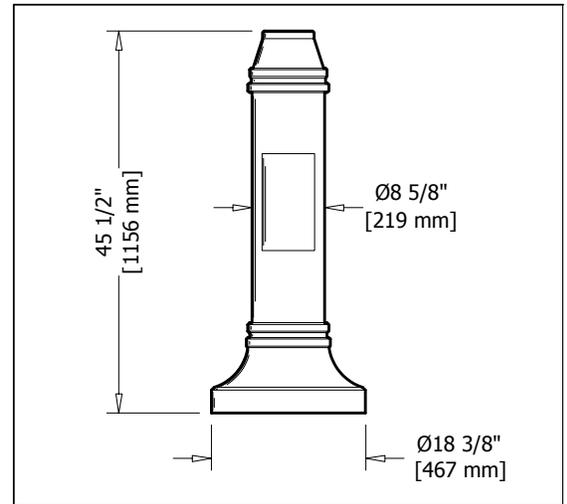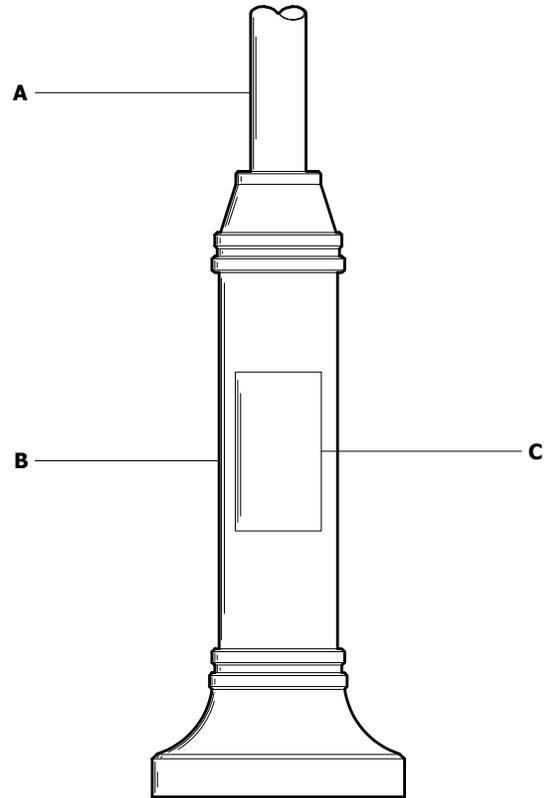

Type	Quantity	Model	Section	Height	Wall thickness	Colour	Other components
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Submitted on _____ for <input type="checkbox"/> Information <input type="checkbox"/> Approval				Project — _____			
<input type="checkbox"/> Cap <input type="checkbox"/> Ø3" x 3" tenon <input type="checkbox"/> Ø4" x 3" tenon				Distributor — _____			
Other(s) — <input style="width: 100%;" type="text"/>				Your order # — _____			
				Representative — _____			
				Our order # — _____			

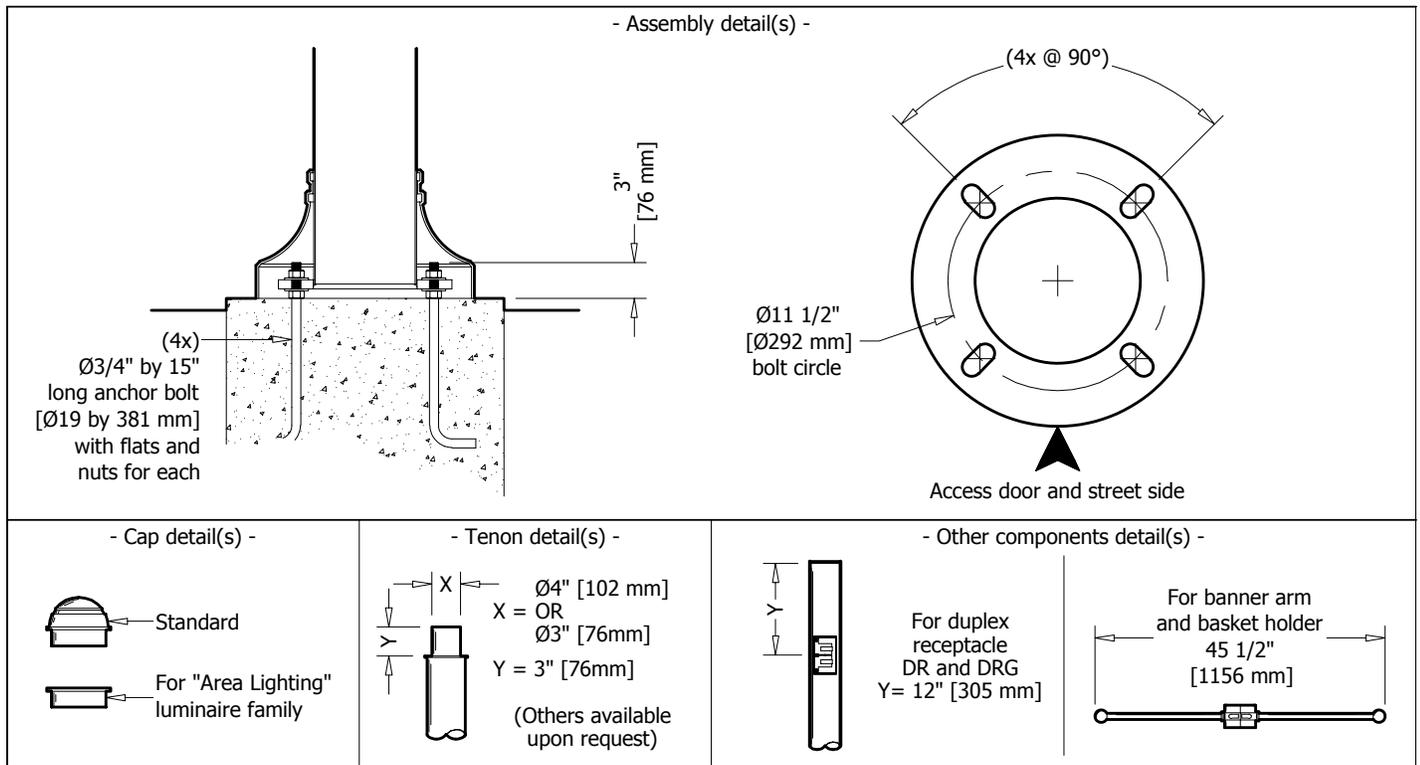

- Specification guide -

Section	Height	Wall thickness	Colour	Other components
Dimension 4" [102 mm] <input type="checkbox"/> <b>4</b> 5" [127 mm] <input type="checkbox"/> <b>5</b>	8' [2,44 m] <input type="checkbox"/> <b>8</b> 10' [3,05 m] <input type="checkbox"/> <b>10</b> 12' [3,66 m] <input type="checkbox"/> <b>12</b> 14' [4,27 m] <input type="checkbox"/> <b>14</b> 16' [4,88 m] <input type="checkbox"/> <b>16</b> 18' [5,49 m] <input type="checkbox"/> <b>18</b> 20' [6,10 m] <input type="checkbox"/> <b>20</b> Others <input type="checkbox"/> <b>★</b>	1/8" [3 mm] <input type="checkbox"/> <b>L</b> 3/16" [5 mm] <input type="checkbox"/> <b>M</b> 1/4" [6 mm] <input type="checkbox"/> <b>H</b>	<p style="text-align: center;">Standard Colours</p> Textured black <input type="checkbox"/> <b>A11</b> Textured bronze <input type="checkbox"/> <b>B11</b> Textured white <input type="checkbox"/> <b>C11</b> <p style="text-align: center;">Special Colours</p> Textured beige <input type="checkbox"/> <b>D11</b> Silver <input type="checkbox"/> <b>E10</b> Silver charcoal <input type="checkbox"/> <b>E20</b> Textured grey blue <input type="checkbox"/> <b>G11</b> Textured blue <input type="checkbox"/> <b>H11</b> Textured dark blue <input type="checkbox"/> <b>H21</b> Textured dark turquoise <input type="checkbox"/> <b>J11</b> Textured turquoise <input type="checkbox"/> <b>J21</b> Textured forest green <input type="checkbox"/> <b>K11</b> Textured dark forest green <input type="checkbox"/> <b>K21</b> Textured dark green <input type="checkbox"/> <b>K31</b> Fine textured dark green <input type="checkbox"/> <b>K42</b> Textured red <input type="checkbox"/> <b>M11</b> Textured burgundy <input type="checkbox"/> <b>M21</b> Fine textured patina <input type="checkbox"/> <b>X11</b> Custom colour <input type="checkbox"/> <b>CC ★</b>	<p style="text-align: center;">Optional</p> Duplex receptacle <input type="checkbox"/> <b>DR</b> Ground fault duplex receptacle <input type="checkbox"/> <b>DRG</b> Banner arm Ø4" (Ø102 mm) <input type="checkbox"/> <b>LR41</b> ◆ <input type="checkbox"/> <b>LR42</b> ◆ Ø5" (Ø127 mm) <input type="checkbox"/> <b>LR51</b> ◆ <input type="checkbox"/> <b>LR52</b> ◆ Basket holder Ø4" (Ø102 mm) <input type="checkbox"/> <b>LH41</b> ◆ <input type="checkbox"/> <b>LH42</b> ◆ <input type="checkbox"/> <b>LH43</b> ◆ <input type="checkbox"/> <b>LH44</b> ◆

● Available only in aluminium & M wall thickness  
★ Consult manufacturer

◆ Consider a greater EPA when adding accessories to this component.

**IMPORTANT NOTICE**  
Éclairage SDL inc. disclaims any responsibility for problems that could occur from a combination of third party products with those of Éclairage SDL inc.

Order example	<b>QB</b>	-	<b>4ALR</b>	-	<b>12</b>	-	<b>L</b>	-	<b>A11</b>	-	<b>DR/LR42</b>
	Model		Section		Height		Wall thickness		Colour		Other components