CONSTRUCTION

- Bracket - Composed of an aluminium tube of rectangular section, welded in one part to a vertical aluminium tube of Ø4" (102 mm) and in the other part to a pole extension or a moulded plate. The pole extension, composed of a Ø4" (102 mm) or of a Ø5" (127 mm) aluminium tube and of an 8" (203 mm) long internal adapter, slips into a pole and is mechanically held in place by six set screws installed on the later. The wall plate, moulded of 356 aluminium alloy, is fixed to the wall support. The bracket is equipped with a Ø3" (76 mm) or a Ø4" (102 mm) tubular aluminium tenon that receives a luminaire holder.
- Wall support - Made of a galvanized steel plate of heavy gauge, in a hooked shape. This support is fixed to the wall using bolts.
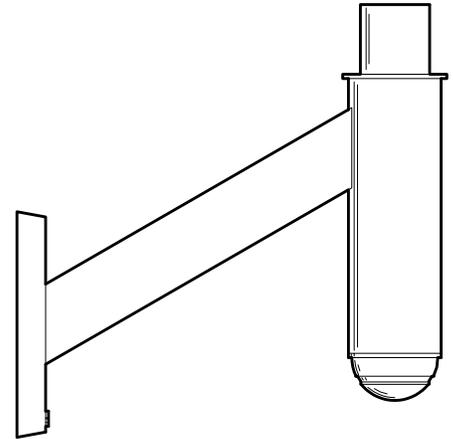
FINISH

- All surfaces are chemically treated against corrosion through a multi-stage immersion process. The polyester powder finish is applied by a thermostatic process offering an excellent protection conforming to ASTM G7, D-2247 and B-117/D-1654 standards. Standard colours are black, bronze and white with a textured finish. Consult SDL's "Colour Selection Guide" for others.

HARDWARE
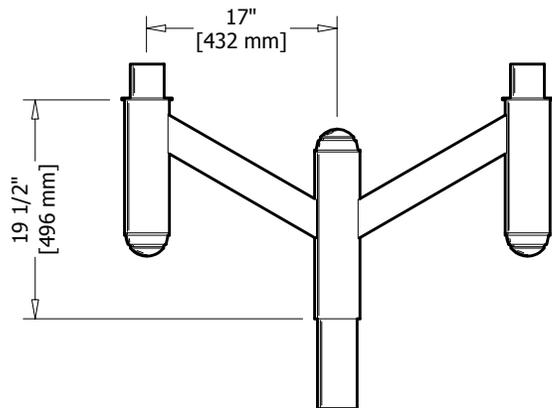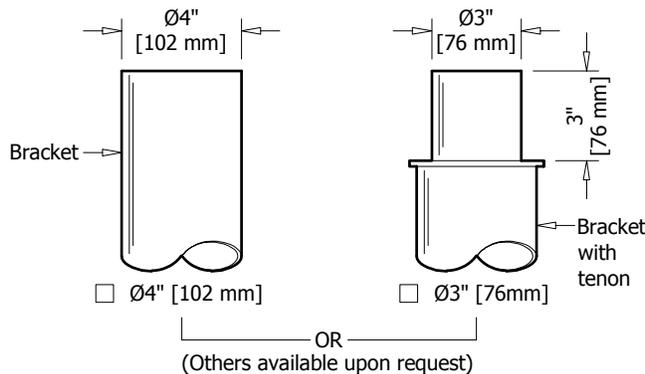
- All exterior hardware is made of stainless steel.

WARRANTY

- This product has a three year warranty on the finish and against any manufacturing defect. The ballast and its components are covered by the manufacturer's warranty.
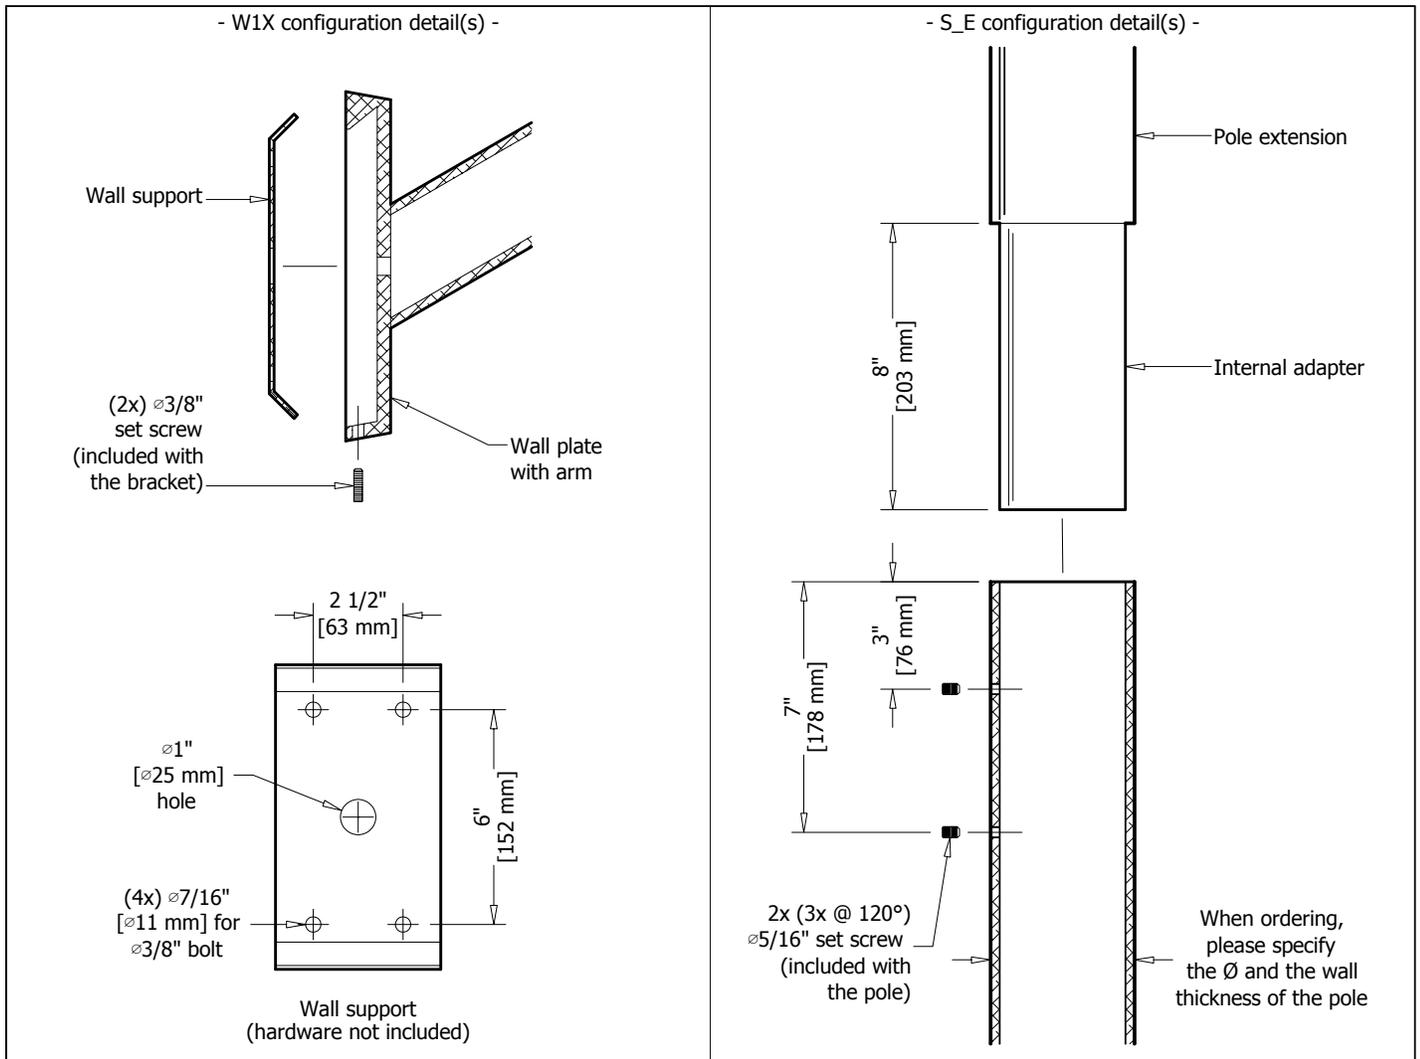

W1X Weight —— **8,0 lb (3,6 kg)**		**S1E** EPA —— **1,02 sq ft** / Weight —— **13,5 lb (6,1 kg)**		**S2E** EPA —— **2,04 sq ft** / Weight —— **18,5 lb (8,4 kg)**	
S3E EPA —— **2,72 sq ft** / Weight —— **23,5 lb (10,7 kg)**		**Y3E** EPA —— **2,45 sq ft** / Weight —— **23,5 lb (10,7 kg)**		**S4E** EPA —— **3,39 sq ft** / Weight —— **28,0 lb (12,7 kg)**	

- Interface detail(s) -

Ø4" [102 mm]

Ø3" [76 mm]

3" [76 mm]

Bracket

Bracket with tenon

☐ Ø4" [102 mm]   ☐ Ø3" [76mm]

—— OR ——
(Others available upon request)

17" [432 mm]

19 1/2" [496 mm]

Type	Quantity	Model	Configuration	Colour
		_	_	

Submitted on _____ for ☐ **Information** ☐ **Approval**

Other(s) ——

Project —— _____

Distributor —— _____

Your order # —— _____

Representative —— _____

Our order # —— _____

- W1X configuration detail(s) -

Wall support

(2x) ⌀3/8"
set screw
(included with
the bracket)

Wall plate
with arm

2 1/2"
[63 mm]

⌀1"
[⌀25 mm]
hole

6"
[152 mm]

(4x) ⌀7/16"
[⌀11 mm] for
⌀3/8" bolt

Wall support
(hardware not included)

- S_E configuration detail(s) -

Pole extension

Internal adapter

8"
[203 mm]

3"
[76 mm]

7"
[178 mm]

2x (3x @ 120°)
⌀5/16" set screw
(included with
the pole)

When ordering,
please specify
the Ø and the wall
thickness of the pole

- Specification guide -

Configuration	-	Colour

Configuration

Without pole extension

W1X ☐

With pole extension

S1E ☐
S2E ☐
S3E ☐
Y3E ☐
S4E ☐

Colour

Standard Colours

Textured black	**A11** ☐	Textured white	**C11** ☐
Textured bronze	**B11** ☐		

Special Colours

Textured beige	**D11** ☐	Textured forest green	**K11** ☐
Silver	**E10** ☐	Textured dark forest green	**K21** ☐
Silver charcoal	**E20** ☐	Textured dark green	**K31** ☐
Textured grey blue	**G11** ☐	Fine textured dark green	**K42** ☐
Textured blue	**H11** ☐	Textured red	**M11** ☐
Textured dark blue	**H21** ☐	Textured burgundy	**M21** ☐
Textured dark turquoise	**J11** ☐	Fine textured patina	**X11** ☐
Textured turquoise	**J21** ☐	Custom colour	**CC** ★☐

General note: When ordering, please specify
the Ø of the pole.
★ Consult manufacturer

IMPORTANT NOTICE
Éclairage SDL inc. disclaims any responsability for problems
that could occur from a combination of third party products
with those of Éclairage SDL inc.

Order example	**DT5**	-	**S2E**	-	**A11**
	Model		Configuration		Colour