

CONSTRUCTION

- Wall plate Made of one piece moulded 356 aluminium alloy and is directly bolted to a
 wall. The wall plate receives a ballast of maximum 175W, mounted on a galvanized
 steel plate. (Ballast not included with the bracket).
- **A** Wall housing Made of one piece moulded 356 aluminium alloy and has integrated heat dissipation ribs. The housing is mechanically fixed to the wall plate and their sealing is ensured by a high-strength EPDM gasket.
- **B** Bracket Composed of a "U" shaped curved tube, of Ø1 1/2" (38 mm) aluminium, welded to the wall housing. A three screw fastening system can receive a luminaire equipped with a 1 3/16" (30 mm) SDL adapter.

FINISH


 All surfaces are chemically treated against corrosion through a multi-stage immersion process. The polyester powder finish is applied by a thermostatic process offering an excellent protection conforming to ASTM G7, D-2247 and B-117/D-1654 standards. Standard colours are black, bronze and white with a textured finish. Consult SDL's "Colour Selection Guide" for others.


HARDWARE

- All exterior hardware is made of stainless steel.

WARRANTY


 This product has a three year warranty on the finish and against any manufacturing defect. The ballast and its components are covered by the manufacturer's warranty.



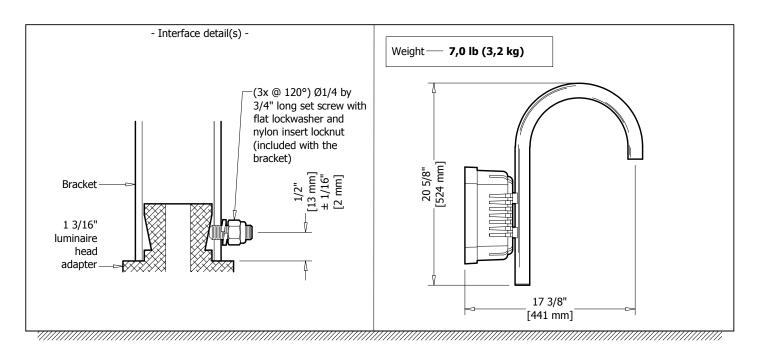


Type — Quantity —	Model — — — — — — — — — — — — — — — — — — —	Colour———————————————————————————————————
Submitted on	for Information Approval	Project —
Other(s) —		Distributor —
		Your order # —
		Representative —
		Our order # —



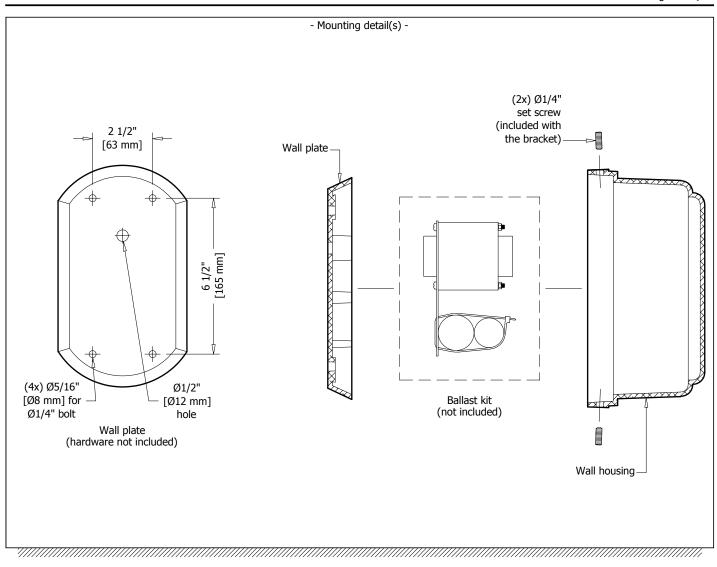

- Specification guide -

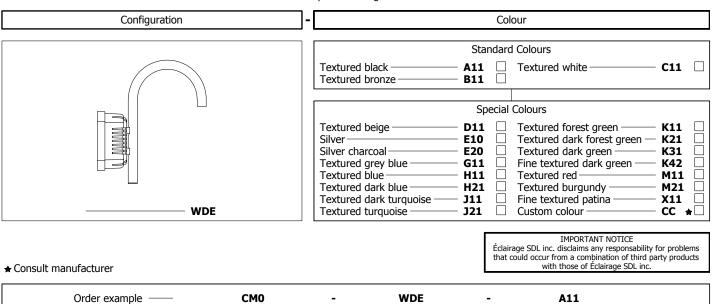

Configuration

Colour

Model