

Track Current Limiting Feeds


Two Circuit Track System

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

IS225



IS226

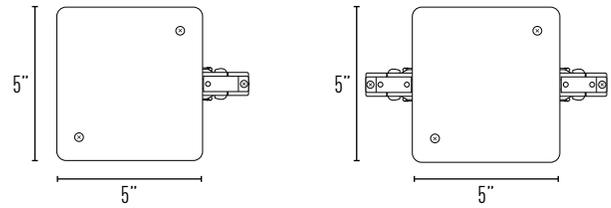

Order Matrix | Example: IS225W-2A

A		B		C	
A	Catalog Number	C	Amperage		
IS225	Two Circuit End Feed	-1A	120W/1A		
IS226	Two Circuit In-Line Feed	-2A	300W/2.5A		
		-5A	600W/5A		
B	Finish	-7A	900W/7.5A		
B	Black	-10A	1200W/10A		
W	White	-12A	1440W/12A		

DESCRIPTION

Current limiters are intended to be installed at every track feed location in place of a standard non-limiting feed. These feeds incorporate a circuit breaker which are designed to limit available wattage to the track. Without a current limiter lighting loads are being calculated by the overall length of the track multiplied by 45W.

FEATURES

- Available in in-line or end feed
- Up to six different amperages
- Two different finishes
- Self luminous ON/OFF breaker switch
- Plastic polycarbonate cover

END FEED

- 5" width x 5" length x 1 1/4" height, with breaker on side

IN-LINE FEED

- 5" width x 5" length x 1 1/4" height, with breaker on side

ELECTRICAL

- 120V/60Hz capacity
- All wiring should meet National and local electrical codes
- Use 12 gauge, 90°C minimum supply wire

LISTING

- ETL Listed to US and Canadian standards for dry locations