


Ladylux Pro 32 244

Pull Down Spray-Single Extrusion

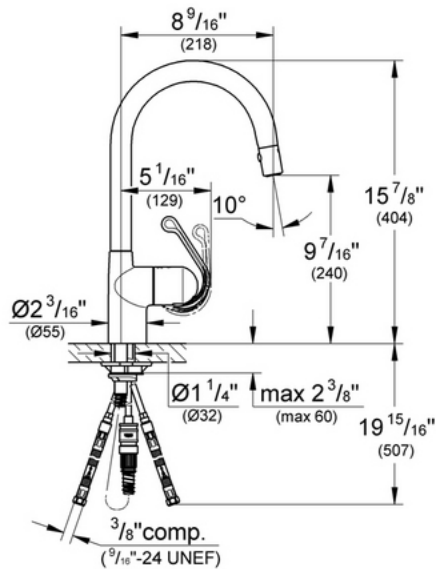

Description

GROHE SilkMove® ceramic cartridge
 SpeedClean anti-lime system
 Push Button Control - to switch from regular flow to spray
 Quick installation system
 Single lever handle
 Variable handle positioning
 Stainless steel braided flexible supplies
 56" extractable hose
 8 9/16" spout reach
 360° swivel spout

IAPMO file # 1750

Installation note: For full handle movement when mounted in front of a wall or backsplash, this faucet must be installed with no less than 3 1/4" of clearance between the faucet and backsplash or wall, unless the faucet is installed with the handle facing forward (handle opposite the wall).

Flow Rate

2.2 gpm at 45 psi, 2.5 gpm at 80 psi
 (9.5 lpm)

Code Compliance

- * ASME/ANSI A112.18.1M
- * ANSI/NSF Standard 61
- * ADA Compliant

Finish Options

- 32 244 OOO Chrome
- 32 244 DCO SuperSteel