


Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

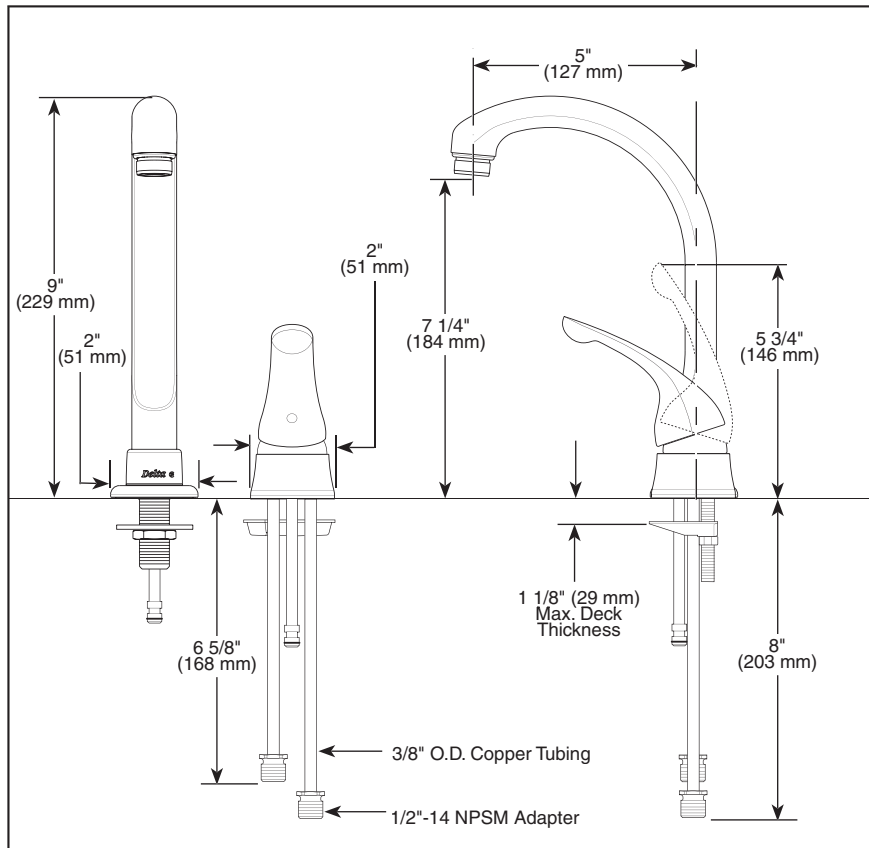

## BAR & PREP SINK FAUCETS

- Waterfall® Series
- Single Handle Widespread Deck Mount
- Two Hole Sink Applications
- Quick Snap® Hose Installation

### STANDARD SPECIFICATIONS:


- Solid fabricated brass body.
- 5" (127 mm) long, 9" (229 mm) high spout swings 360°.
- Lever handle shall return to neutral position when faucet is turned off.
- Red and blue button on handle to indicate hot/cold temperature.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Quick Snap® hose installation.
- 3/8" O.D. straight, staggered copper supply tubes - 6 5/8" (168 mm) and 8" (203 mm) long - with 1/2"-14 NPSM adapters.
- Requires minimum 1 1/2" (38 mm) diameter hole.
- Thick deck mounting kit for 2 1/2" (64mm) max. deck thickness available as RP32638.

### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- NSF 61
-  Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified

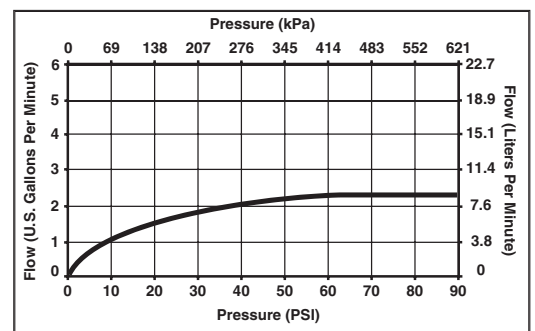

Indianapolis, Indiana 46280  
 A Division of Masco Corporation of Indiana  
 © 2006 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book for finish options and product availability.