

DESCRIPTION

- Metal construction with LifeShine® Stainless or Oil Rubbed Bronze finish
- 1/2" IPS connection

OPERATION

- Flow levers operate counterclockwise through a 180 degree arc with off at 6 o'clock and maximum flow at the 12 o'clock position. Shut off in clockwise direction

FLOW

- 5.5 gpm @ 45 psi

CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel material

STANDARDS

- Certified to meet CSA B-125, ASME A112.18.1M, NSF/ANSI 61/9 and all applicable requirements referenced therein
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installation

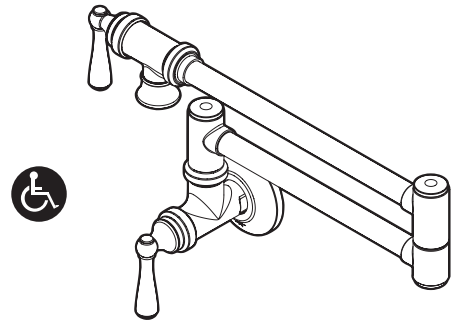

Pot-Filler Faucet

Models: S664SL, S664ORB

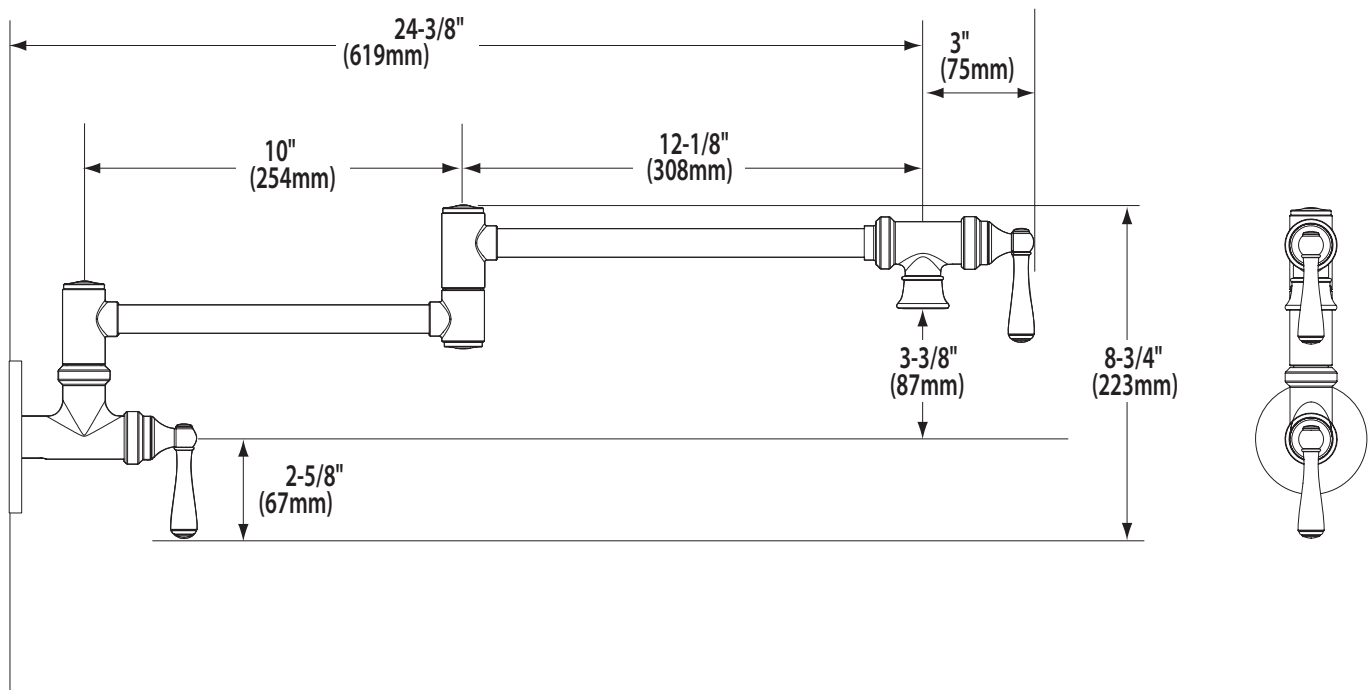

CRITICAL DIMENSIONS

(DO NOT SCALE)