

## DESCRIPTION

- Metal construction with chrome plated, LifeShine® stainless, oil rubbed bronze, nickel or wrought iron finish
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes hot and cold temperature indicator
- Designed to be installed through 2, 1-1/4" (32mm) min. dia. holes
- Hydrolock™ quick connect installation

## OPERATION

- Lever style handle
- Temperature controlled by 130° arc of handle travel

## FLOW

- Aerator is limited to 2.2 gpm max. (8.3 L/min)

## CARTRIDGE


- 1225 cartridge design with nonmetallic/nonferrous and stainless steel materials

## STANDARDS

- Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


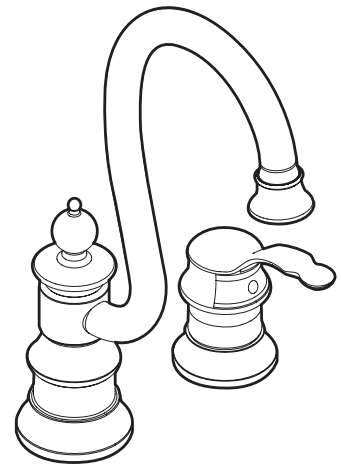


### Waterhill™

#### Single-Handle Bar Faucet

**Models:** S611, S611SL, S611ORB, S611NL, S611WR

**Note:** Designed to install through 2 holes 1-1/4" (32mm) min. dia. and 4" (102mm) on center

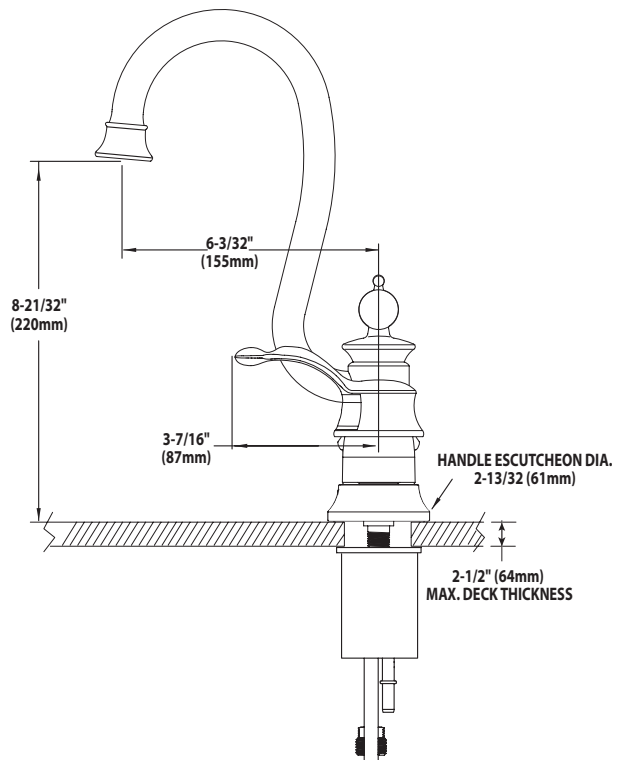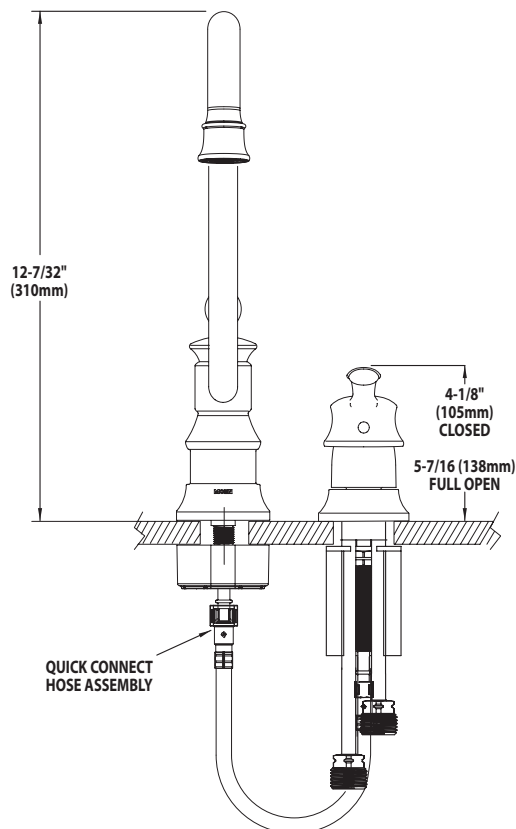

## CRITICAL DIMENSIONS

(DO NOT SCALE)