


Submitted Model No.:_______Specific Features:

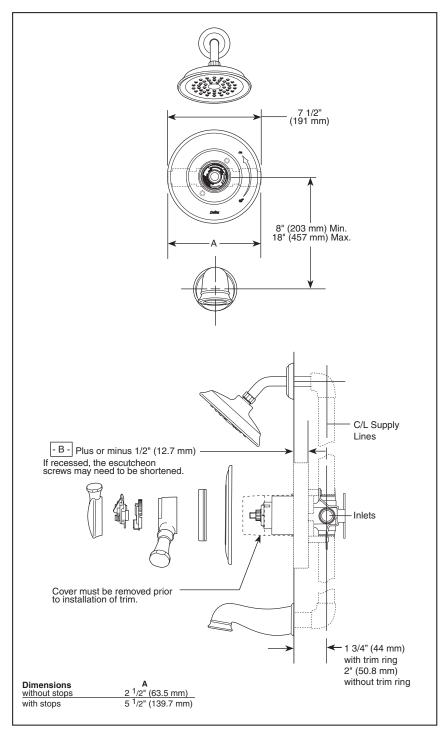

ODELTA.

BATH MIXING VALVES

- Lockwood[™] Series
- Tub Only (17140)
- Shower Only (17240)
- **■** Tub/Shower (17440)
- Single Handle
- Monitor® with Scald-Guard® Valve
- Pressure Balance
- Volume Controlled with Handle Accent
- Temperature Controlled with Dial
- Universal Fittings





COMPLIES WITH:


- ASME A112.18.1
- ASSE 1016
- CSA B125

Indicates ADA compliance to ICC/ANSI A117.1

- CSA Certified
- IAPMO Listed

STANDARD SPECIFICATIONS:

- Requires 1 1/2" (38 mm) minimum wall cavity.
- Back-to-back installation capability.
- Solid brass body.
- Monitor® with Scald-Guard® valve.
 Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- Lever volume control handle; temperature adjustment dial.
- Field adjustable to limit dial rotation into hot water zone.
- Maximum dial rotation adjustable between 90° and 180°.



| Standard Features | 17140 | 17140-PT | 17140-SS | 17240 | 17240-PT | 17240-SS | 17440 | 17440-PT | 17440-SS |
|--------------------------------------------------|-------|----------|----------|----------|----------|----------|----------|----------|----------|
| Washerless | • | • | • | • | • | • | • | • | • |
| Scald-Guard® Valve | • | • | • | * | • | • | • | • | • |
| Back-to-Back Installation | • | • | • | * | • | • | * | • | * |
| 1/2" I.P.S. Inlets and Outlets | • | • | • | • | • | • | • | • | • |
| 1/2" C.W.T. Sweat Inlets and Outlets | • | • | • | • | • | • | * | • | • |
| Replaceable Cartridge | • | • | • | • | • | • | * | • | • |
| Adjustment Rotational Limit Stop | • | • | • | • | • | • | • | • | • |
| Matching Finish Temperature Adjustment Dial | • | • | • | • | • | • | * | • | • |
| Metal Shower Arm and Flange | | | | • | • | • | • | • | • |
| Non-Metallic Touch-Clean [®] Showerhead | | | | • | • | • | * | • | • |
| Tub Filler Non-Diverter | • | • | • | | | | | | |
| Tub Filler w/Pull-Down Diverter | | | | | | | * | • | • |
| Chrome Finish | + | | | • | | | * | | |
| Aged Pewter Finish | | • | | | • | | | • | |
| Brilliance® Stainless Finish | | | * | | | * | | | * |


Available Options for Field Conversion:

- Screwdriver Stops. Order two RP5876s for IPS or two RP6005s for C.W.T.

RP42578▲

- Screwdriver Stops. Order two RP5876s for IPS or two RP6005s for C.W.T.
 Shower Arm. Order RP40593▲.
 Shower Flange. Order RP40592▲.
 Non-metallic Push-Clean™ showerhead/1 spray pattern. Order RP28599▲.
 Non-metallic Touch-Clean® showerhead/1 spray pattern. Order RP28600▲.
 Non-metallic Dual Spray Touch-Clean® showerhead/2 spray patterns. Order RP28601▲.
 Non-metallic Ultimate Touch-Clean® showerhead/3 spray patterns. Order RP28602▲.
 Brass shower arm diverter for hand shower. Order RP4239 (chrome only).
 Personal hand shower with 24" vertical bar, 60" hose. Order RP7245 (chrome only).
 Personal hand shower with 24" vertical bar, 60" hose, vacuum breaker and wall supply elbow. Order RPW324HDF (chrome only).
 Rath waste assemblies and bath accessories also available sengrately.
- Bath waste assemblies and bath accessories also available separately.


▲ = Specify Finish



8"

(203 mm)

(76 mm)





Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2004 Masco Corporation of Indiana