

TETSU SERIES™ 6' Oval Soaker Tub MODEL 60580

- Acrylic with fiberglass reinforcement
- Available in White 001 and Linen 222 colors
- Center drain location only
- Suitable for undermount applications
- Textured tub bottom pattern
- Drain not included

Nominal Dimensions:


6' Oval Soaker Tub

38" x 68" x 23"

(1727 x 965 x 584mm)



ROUGH IN DIAGRAM AND
PRODUCT SPECIFICATIONS
SHOWN ON REVERSE SIDE

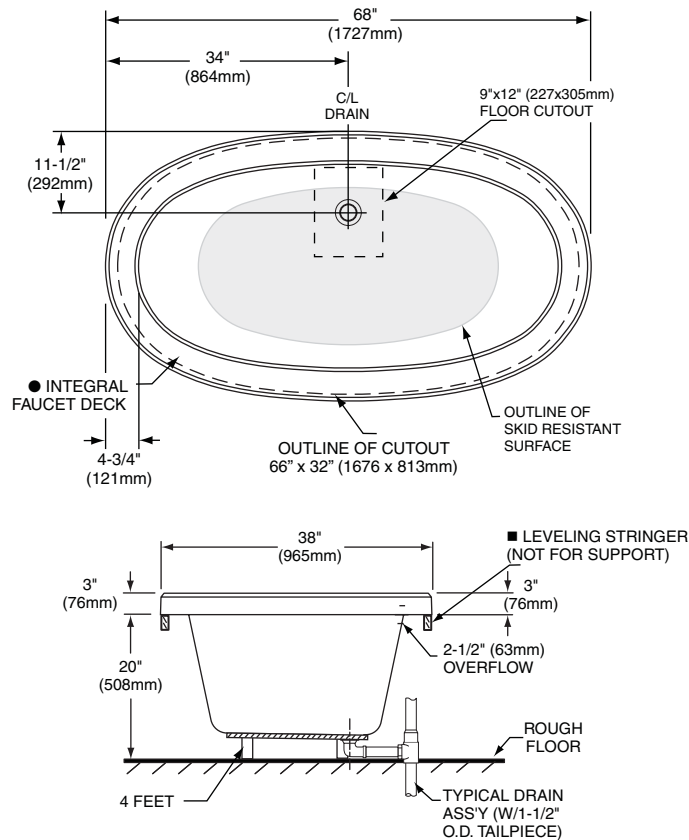

* ALL DIMENSIONS MAY VARY + 1/4" -(6mm)

GENERAL SPECIFICATIONS FOR 60580 OVAL BATHING POOL

INSTALLED SIZE	68" x 38" x 23" (1727x 965 x 584mm)
WEIGHT	680 Lbs. (308 Kg.)
WEIGHT w/WATER	1043 Lbs. (473 Kg.)
GALLONS TO OVERFLOW	90 Gal. (409 L.)
BATHING WELL AT SUMP	42" x 22" (1067 x 559mm)
BATHING WELL AT RIM	58-1/2" x 28-1/2" (1486 x 724mm)
WATER DEPTH TO OVERFLOW	14-7/8" (390mm)
FLOOR LOADING	68 Lbs./Sq.Ft. (331 Kg./Sq. m)
PTS.	27.8
CUBE (Ft³)	42.8

NOTES:

BATH TO BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY 4 FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

- IF INSTALLING A DECK-MOUNTED FAUCET, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING AND DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.