


Model 61602-170 Shown

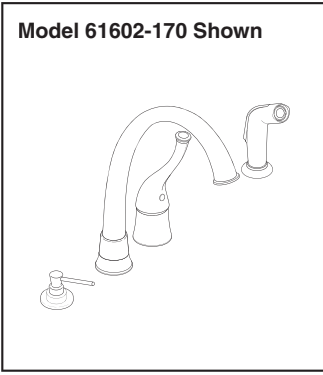

Submitted Model No.: _____

Specific Features: _____



BRIZO™

KITCHEN FAUCETS

- Providence™ Contemporary Series
- Single Handle
- Widespread
- 2, 3 & 4 Hole Sink Applications



Recommend 4" center to center from spout to valve.
 Maximum spout to valve spacing is 8".
 Recommend 4" to 8" center to center from spout to sprayer, any additional spread will shorten the reach of the sprayer.

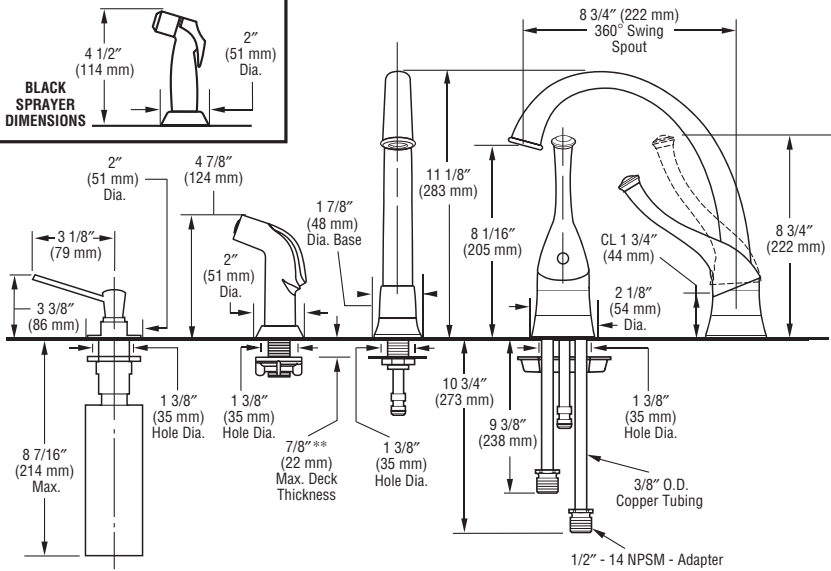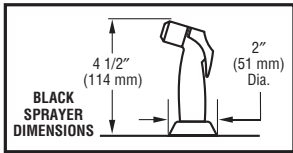


COMPLIES WITH:

- ICC/ANSI A117.1/ADA
- CSA B125
- ASME A112.18.1
- NSF 61

STANDARD SPECIFICATIONS:

- Single handle kitchen faucets for concealed mounting on two, three and four hole sinks.
- Solid brass fabricated body.
- 8 3/4" (222 mm) long, 11 1/8" (283 mm) high, spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control handle shall return to neutral position when valve is turned off.
- Models 61601 and 61602 Series with spray attachment has anti-siphon device as integral part of valve body.
- Quick connect spray and spout hoses.

**Thick tile 2" mounting kits available as RP30392.

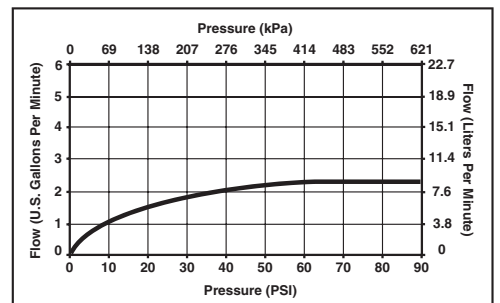

Standard Features	61600*-170	61601*-170	61602*-170
Washerless	◆	◆	◆
Widespread	◆	◆	◆
Two Hole Installation	◆		
Three Hole Installation		◆	
Four Hole Installation			◆
Lever Handle	♿	♿	♿
8 3/4" (222 mm) Long, 11 1/8" (283 mm) High, Spout Swings 360°	◆	◆	◆
3/8" O.D. Straight, Staggered Copper Tube Inlets—9 3/8" (238 mm) and 10 3/4" (273 mm) Long with 1/2"-14 NPSM Adapters	◆	◆	◆
Sprayhead Matches Finish		◆	◆
Soap/Lotion Dispenser			◆
Quick Connect Spray and Spout Hoses	◆	◆	◆

*To specify finish add suffix

Available Finishes

Suffix	Finish
GB	Gloss Black
GBBB	Gloss Black/ <i>Brilliance</i> ® Brass
PC	Polished Chrome
PCBB	Polished Chrome/ <i>Brilliance</i> ® Brass
SS	<i>Brilliance</i> ® Stainless