



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Pullout faucet spout provides infinite maneuverability for cleaning or rinsing
- Metal construction with chrome plated, classic stainless, and Glacier finish
- Hydrolock® quick connect installation
- Pullout spray with 59" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

## OPERATION

- Single handle lever
- Convenient single-button actuation provides flexibility to switch from stream to spray mode
- Temperature controlled by 120° arc of handle travel
- Spout receptor rotation is 120°
- Operates with less than 5 lbs. of force

## FLOW

- Maximum flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

## CARTRIDGE


- Ceramic disc technology
- Engineered polymers and ceramic materials

## STANDARDS

- Designed and manufactured to comply with the requirements of: ASME A112.18.1/CSA B-125.1, NSF 61 Section 9, California Proposition 65, ICC A117.1, ADA
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow.

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

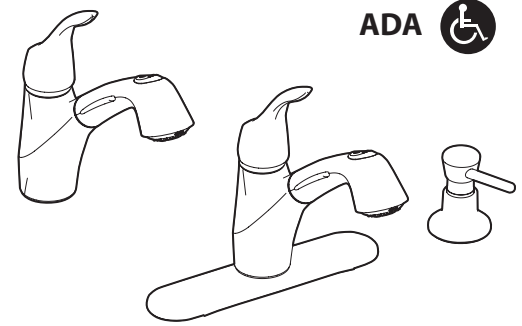

**Torrance™**  
**Single Control Pull-Out Kitchen Faucet**

**Models:** 87666CSD, 87666CSL, 87666W

**NOTE:** DESIGNED TO INSTALL THROUGH  
1 OR 3 HOLES 1-1/4" (32mm) MIN. DIA.

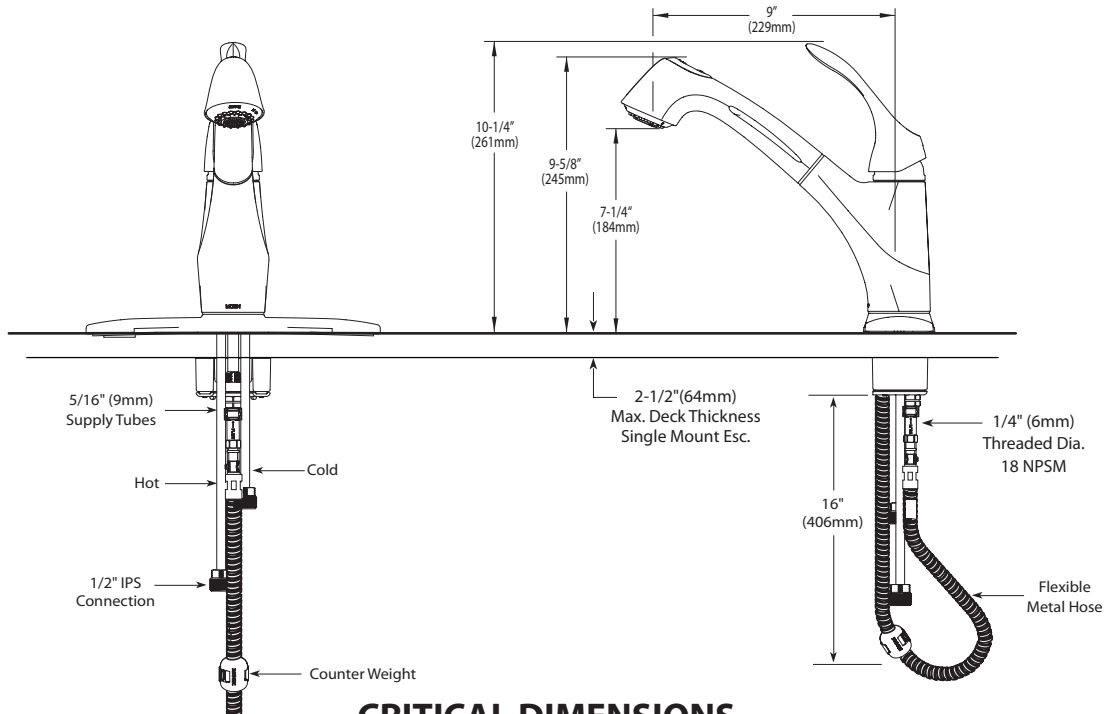

## CRITICAL DIMENSIONS

(DO NOT SCALE)

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

[www.moen.com](http://www.moen.com)