



Buy it for looks. Buy it for life.®

### FAUCET DESCRIPTION

- Metal construction with chrome, oil-rubbed bronze, LifeShine® stainless steel or pewter finish
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes matching traditional side spray with Hydrolock® quick connect installation

### OPERATION

- Lever style handle
- Temperature controlled by 130° arc of handle travel
- Will operate with less than 5 lbs. of force

### FLOW

- Aerator is limited to 2.2 gpm (8.3 L/min).

### CARTRIDGE

- 1225 cartridge design
- Nonmetallic, nonferrous and stainless steel material


### STANDARDS

- Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


# Specifications



## Vestige™ Single-Handle Kitchen Faucet with Side Spray

Models: 7065, 7065SL, 7065ORB, 7065PW

Spout, Handle, & Hose Spray install  
through deck holes a minimum of  
1-1/4" (32mm) in diameter.

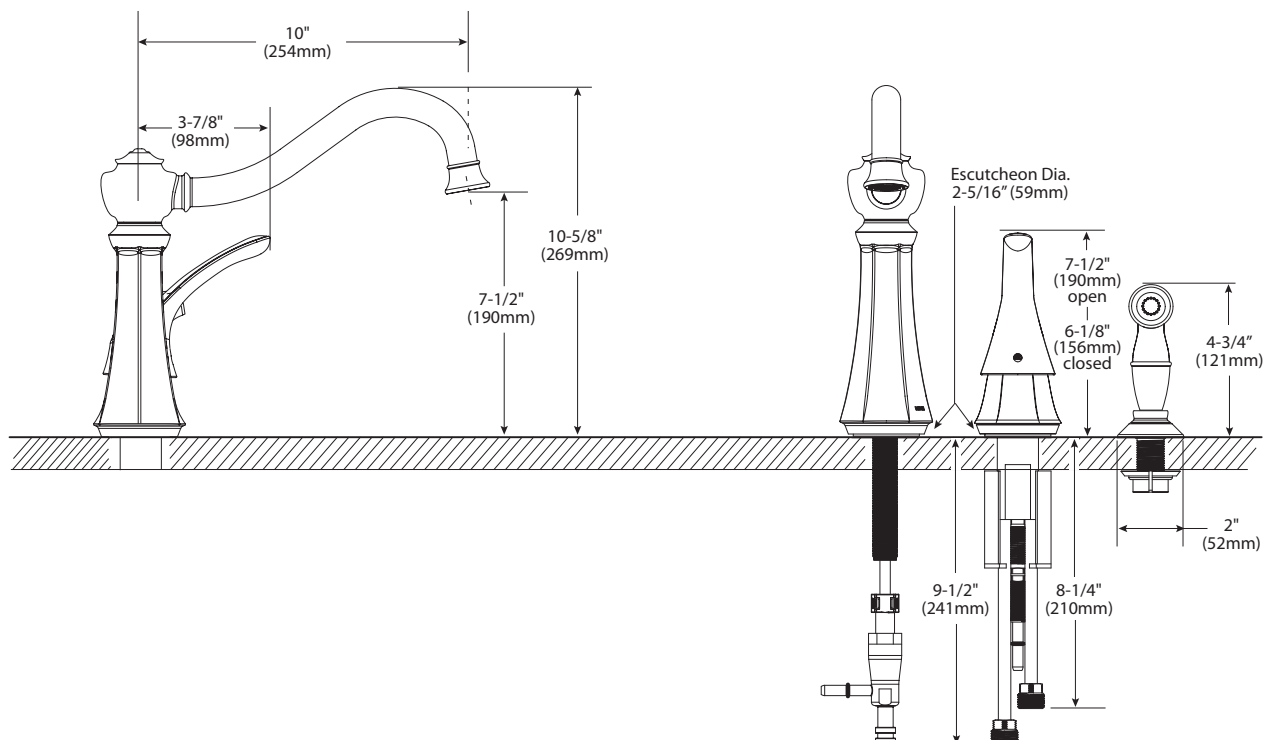

### CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

Rev. 2/07

Hydrolock® is a registered trademark of COOPER STANDARD AUTOMOTIVE INC.

www.moen.com