

DESCRIPTION

- Metal construction with chrome plated, LifeShine® stainless or oil rubbed bronze finish
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION

- Lever style handle
- Temperature controlled by 140° arc of handle travel
- Handle can be installed on the right or left side of the spout

FLOW

- Aerator is limited to 2.2 gpm max. (8.3 L/min)

CARTRIDGE


- 1225 cartridge design with nonmetallic/nonferrous and stainless steel materials

STANDARDS


- Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

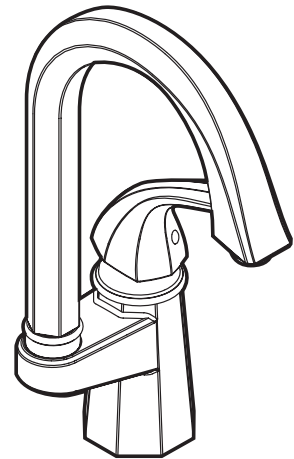

**Single-Handle Prep Bar Faucet
Models: S641, S641SL, S641ORB**

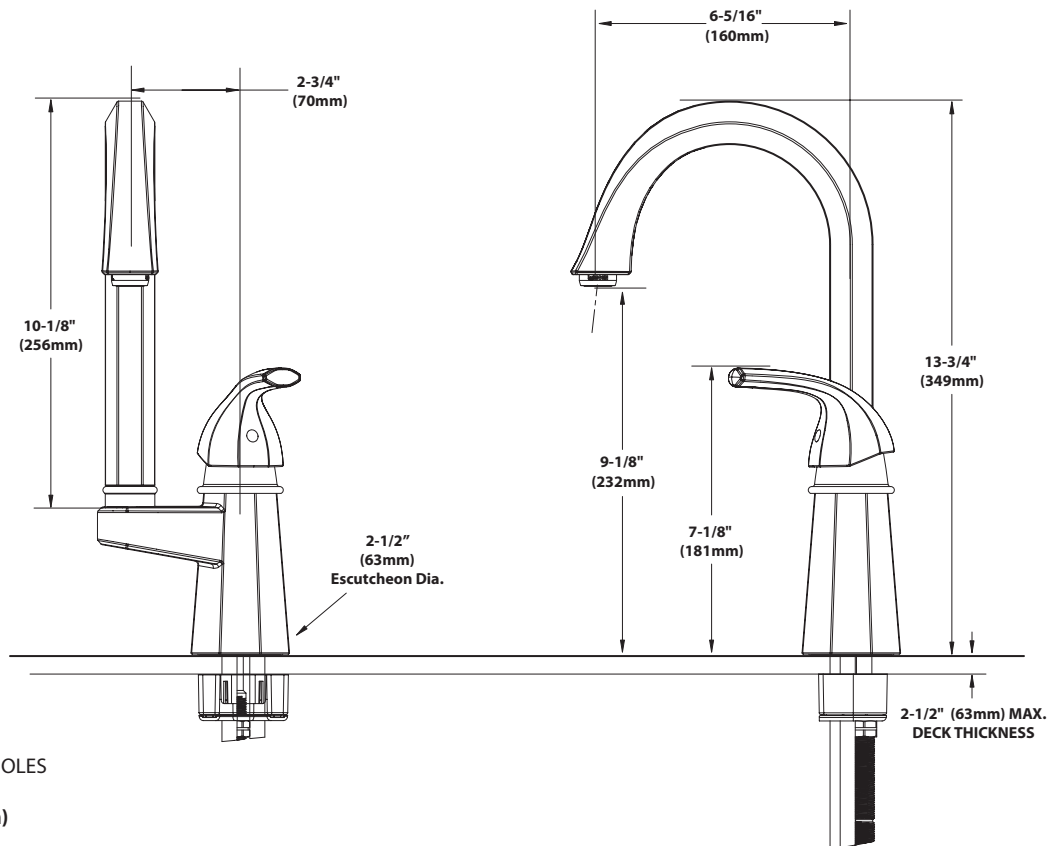

NOTE: MINIMUM DIA. HOLES FOR INSTALLATION
Faucet = 1-1/4" (32mm)

CRITICAL DIMENSIONS

(DO NOT SCALE)