

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes hot and cold temperature indicator
- Designed to be installed through 2, 1-1/4" (32mm) min. dia. holes
- Hydrolock® quick connect installation

OPERATION

- Lever style handle
- Temperature controlled by 130° arc of handle travel


FLOW

- Aerator is limited to 2.2 gpm max. (8.3 L/min)

CARTRIDGE


- 1225 cartridge design with nonmetallic/nonferrous and stainless steel materials

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9
- Complies with California Proposition 65 and with the Federal Water Drinking Act
- **ADA**  for lever handles



WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

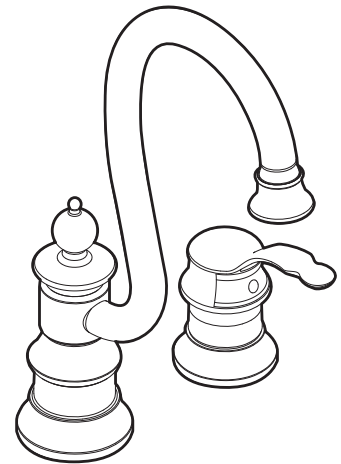

Waterhill™
Single-Handle Bar Faucet
Models: S611series

NOTE: DESIGNED TO INSTALL THROUGH 2 HOLES
1-1/4" (32MM) MIN. DIA. AND 4" (102MM) ON CENTER

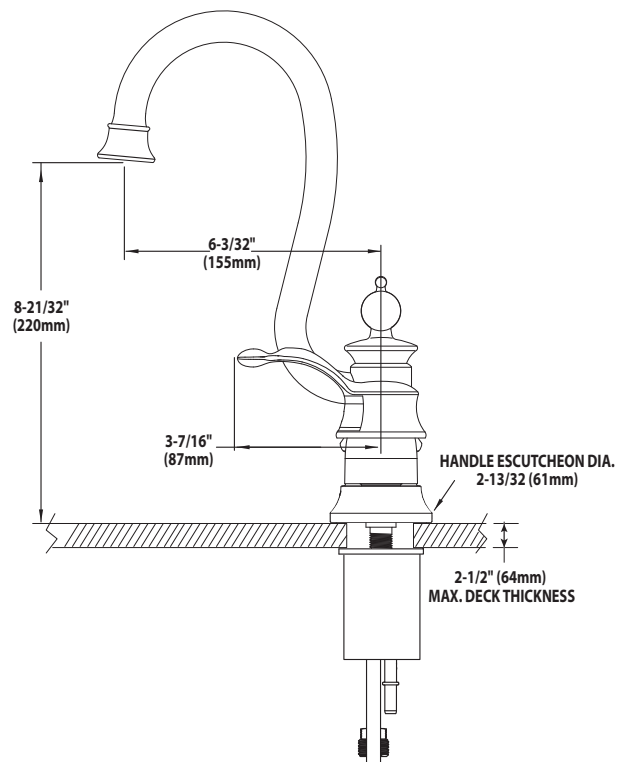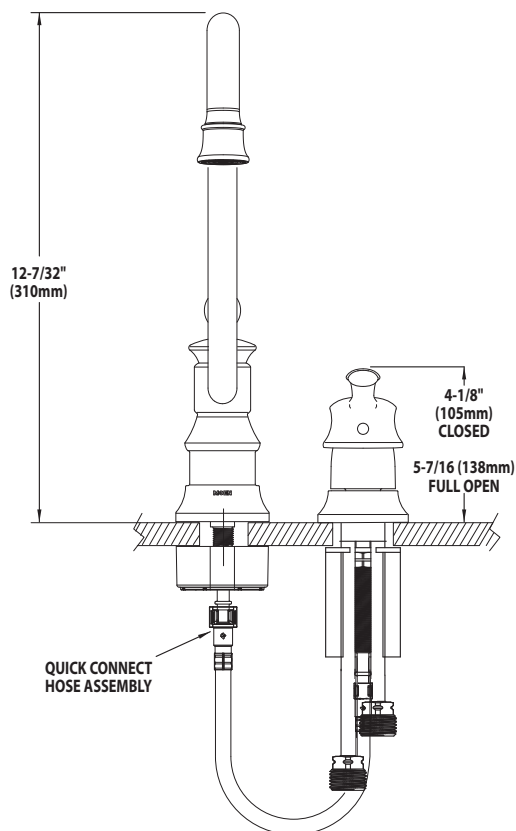

CRITICAL DIMENSIONS

(DO NOT SCALE)