


# Bulldog® Dimensions and Operating Instructions

<b>Seat</b>					
	Seat Height*	Seat Depth**	Seat Width	Seat Pan Angle	Seat Back/ Seat Pan Angle
ANSI HFS 100-1988, Compliance Code Standards:					
	16" - 20½"	15" - 17"	18.2" min.	0° - 10° fixed	90°-105° at rest
<b>Executive</b>	16" - 21"*	17½"	21"	2°	101°
<b>Management</b>	16" - 21"*	17½"	21"	2°	101°
<b>Operational</b>	16" - 21"	16⅓/16"	20"	2°	100°
<b>High Task</b>	22½" - 32½"	16⅓/16"	20"	2°	100°

<b>Back</b>				<b>Armrests</b>		
	Backrest	Lumbar Support Height	Lumbar Support Width	Seat Back Width	Width Between Armrests	Width Between Std. Adjustable High Perf. Arm
ANSI HFS 100-1988, Compliance Code Standards:						
	yes	6" - 9"	12" min.	12" min.	18.2" min.	
<b>Executive</b>	yes	5" - 9"	19"	22½"	19"	17.5" - 18.5"
<b>Management</b>	yes	5" - 9"	19"	22½"	19"	17.5" - 18.5"
<b>Operational</b>	yes	5" - 9"	16"	16"	18½"	16.5" - 17.5"
<b>Task</b>	yes	5" - 9"	16"	16"	18½"	16.5" - 17.5"
<b>High Task</b>	yes	5" - 9"	16"	16"	18½"	16.5" - 17.5"

\*Three seat height options are available. Medium is displayed above. Low is 14½" - 19⅞". High is 17" - 22". High Task is not included.

\*\*Adjustable seat depth dimensions for Task or Operational are 16⅓/16" - 19⅓/16" and for Management or Executive are 17½" - 19½" (with back in lowest position).

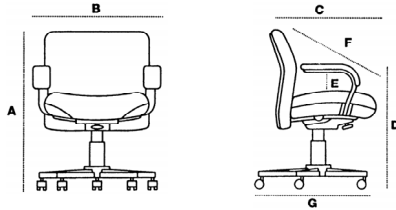

	Executive	Management	Operational	High Task	Side
<b>A</b> overall height	36" - 45"	30" - 39"	31⅞"-40⅞"	36½" - 51"	31⅞"
<b>B</b> overall width	25½"	25½"	23½"	23½"	25⅞"
<b>C</b> overall depth	21⅞"	21⅞"	21⅞"	20½"	23"
<b>D</b> arm height (from floor)	23⅞" - 28⅞"	23⅞" - 28⅞"	24" - 29"	30⅞"-40⅞"	25⅞"
<b>E</b> arm height (from seat ref. pt.)	8½"	8½"	8⅞"	8⅞"	7⅞"
<b>F</b> recline range	17.2°	17.2°	19°	19°	no recline
<b>G</b> base dimension	27" dia.	27" dia.	27" dia.	27" dia.	24" width
<b>H</b> weight (with fixed arms)	50 lbs.	47 lbs.	44 lbs.	52 lbs.	28 lbs.


(Measurements of arm chairs, advanced control with pneumatic seat height adjustment, in inches.)

## Adjustable Arm Options:

High Performance Arms


**Height**  
(from Seat Reference Point)

7" - 11" (4" range)



**Width Between Arms**

Oper. 18½" - 21½"  
Mgt/Exec. 21" - 24"  
(3" range for supports)  
Distance between arm supports



**Rotation**

42° total  
(21° left, 21° right)  
(fixed increment rotation)



**Pad Slide**

1½" forward



**Retrofittable**

Yes