


SAMPLE CATALOG NUMBER

CB3215 - 1CH20T4(MVOLT) - AA - XPS
 Model Number Lamping Option (Voltage) Finish Option


| Model | | | | Lamping Options | Finish | Options |
|---------------|------------|--------|----------|-----------------------------------|---------------------------------------|--------------------------|
| Model Number | Dimensions | | | | | |
| CB3215 | W | 5-3/4" | (146 mm) | 1CH20T4 1CH39T4 | AA BLK WHT | XPS |
| | H | 2-7/8" | (73 mm) | | | |
| | D | 8" | (203 mm) | | | |
| | MC | 1-1/2" | (38 mm) | | | |
| CB3220 | W | 5-3/4" | (146 mm) | 1CH70T4 | AA BLK WHT | XPS |
| | H | 4-3/8" | (111 mm) | | | |
| | D | 8" | (203 mm) | | | |
| | MC | 2-1/4" | (57 mm) | | | |
| CB3230 | W | 8-1/4" | (210 mm) | 1CH70T6 1CH150T6 | AA BLK WHT | QRS XPS |
| | H | 4-1/2" | (114 mm) | | | |
| | D | 9" | (229 mm) | | | |
| | MC | 2-1/4" | (57 mm) | | | |

LINE DRAWINGS


CB3215



CB3220



CB3230



ABBREVIATION KEY

| Dimensions | |
|--|--|
| W | Width |
| H | Height |
| D | Depth (measured from wall to front of fixture) |
| MC | Mounting Center (measured from top of fixture to center of junction box) |
| Lamping Options (Voltage) | |
| CH20T4 | 20w T-4, G8.5 base, ceramic MH (MVOLT) |
| CH39T4 | 39w T-4, G8.5 base, ceramic MH (MVOLT) |
| CH70T4 | 70w T-4, G8.5 base, ceramic MH (MVOLT) |
| CH70T6 | 70w T-6, G12 base, ceramic MH (MVOLT) |
| CH150T6 | 150w T-6, G12 base, ceramic MH (MVOLT) |
| MVOLT is a ballast that operates 120V through 277V A clear lamp is required for XP Optics | |
| Finishes (see inside back cover) | |
| AA | Specular Anodized Aluminum |
| BLK | High Temperature Black |
| WHT | High Temperature White |
| Options | |
| QRS | Quartz restrike, 100w T-4 dc bayonet base (120V only) |
| XPS | Express 10 day shipment |

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

| IES File Number | LER | Report | page |
|-----------------|-----|--------|------|
| CB3215-1CH39T4 | | | |
| CB3220-1CH70T4 | 49 | 11069 | 421 |
| CB3230-1CH150T6 | 43 | 10834 | 421 |


See report on indicated page for complete detail

Candela Distribution

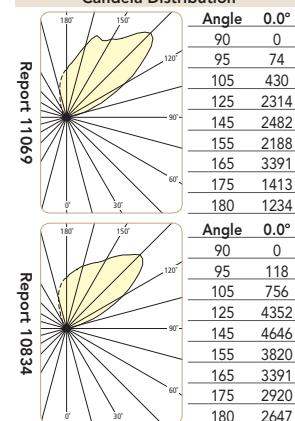

XP OPTICS™

High performance reflector module of specular extruded aluminum with hinged borosilicate glass lens. Use clear lamp for maximum optical performance.



Door Height = 7'
 Ceiling Height = 9'
 Silhouette Height = 6'



XP-C MODULE™

INDOOR

ASYMMETRIC
PERFORMANCE



CB3215-AA



CB3230-BLK

FEATURES

- 5 year product warranty
- Clean end cap design with no visible fasteners
- Gasket color to complement finish; grey gasket for white, black gasket for aluminum or black finishes
- Robust extruded aluminum construction
- Durable anodized or high temperature powder paint finishes
- Easy tool-less relamping
- Ceramic Metal Halide HID lamping
- High power factor integral electronic ballast
- Mounts to horizontally oriented 2 X 4 electrical junction box (by others) with provided hardware (CB3215)
- Mounts to standard electrical junction box (by others) with provided hardware (CB3220 and CB3230)
- XP Optics™. Extruded aluminum high performance reflector system for maximum efficiency. Reflectors are computer optimized for maximum forward throw and produce smooth, uniform surface illumination

COMPANIONS

XP-F Module



Wall P 46

XP-T Module



Wall P 42

SUGGESTED VARIATIONS

- Specialty custom powder paint finishes
- +/-10° tilt for uplight aiming
- Various fabricated housing shrouds



Approved for indoor damp locations.
Metal finishes require DCC (damp clear
coat) for 5 year warranty



800-788-VISA www.visalighting.com