


SAMPLE CATALOG NUMBER

CB5120 - 1QF26(MVOLT) - GFA - CB - XEM
 Model Number Lamping Option (Voltage) Face Finish Side Panel Finish Option


Model Number		Lamping Options		Finish			Diffuser Options	Options	
Model Number	Dimensions			Face	Side Panel	Backplate, Side Panel and Rod			
CB6286 	W	5" (127 mm)	1T50MR16	PTD	BCA	PTD		DCC XPS	
	H	13-1/2" (343 mm)		BA	GFA				
	D	4" (102 mm)		BB	SNA				
	MC	7" (178 mm)							
CB5120 	W	6" (152 mm)	1QF26 1TF32 1N75	PTD	CW	PTD	• AR • SL • PP • SR White acrylic standard	DCC REM XEM XPS	
	H	13-1/4" (337 mm)		BA	GFA				• CB
	D	4" (102 mm)		BB	NM				PB
	MC	7-5/8" (194 mm)		• BCA • BCB	SNA WB				
CB5122 	W	6" (152 mm)	1QF26 1TF32 1N75	PTD	CW	PTD	• AR • SL • PP • SR White acrylic standard	DCC REM XEM XPS	
	H	13-1/4" (337 mm)		BA	GFA				• CB
	D	4" (102 mm)		BB	NM				PB
	MC	7-5/8" (194 mm)		• BCA • BCB	SNA WB				
CB5124 	W	6" (152 mm)	1QF26 1TF32 1N75	PTD	CW	PTD	• AR • SL • PP • SR White acrylic standard	DCC REM XEM XPS	
	H	13-1/4" (337 mm)		BA	GFA				• CB
	D	4" (102 mm)		BB	NM				PB
	MC	7-5/8" (194 mm)		• BCA • BCB	SNA WB				

LINE DRAWINGS


CB6286




CB5120



CB5122



CB5124



Door Height = 7'
 Ceiling Height = 9'
 Silhouette Height = 6'

ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W Width
- H Height
- D Depth (measured from wall to front of fixture)
- MC Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
- TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
- N75 75w A-19, medium base, INC (120V)
- T50MR16 50w MR16, GX5.3 base (12V), halogen (120V; 277V)*

* (Fixture contains an integral step down transformer)
 Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BB Brushed Brass
- BCA Brushed Chrome Alternative
- BCB Brushed Chrome
- CB Polished Chrome
- CW Cherrywood
- GFA Grinder Finish Aluminum
- NM Natural Mahogany
- SNA Satin Nickel Alternative
- WB White Birch

Diffuser Options (see inside back cover)

- AR Arctic Crush Lumicor®
 - PP Paper Leaf Lumicor®
 - SL Silver Spun Lumicor®
 - SR Saffron Taipei Lumicor®
- Note: White acrylic diffuser is standard unless other diffuser option is specified

Options

- DCC Damp clear coat required for all metal finishes in damp locations
- REM Remote emergency battery pack for fluorescent lamping
- XEM Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
- XPS Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB5120-1QF26	22	02588	408
CB5122-1QF26	22	02588	408
CB5124-1QF26	22	02588	408

See report on indicated page for complete detail

Candela Distribution




Wood Face Finish
 Wood Face Veneer is available for CB5120, CB5122 and CB5124 in:
 CW - Cherrywood
 NM - Natural Mahogany
 WB - White Birch

Unfinished for field staining to match architectural detailing



CYPRESS™ - CASCADE™

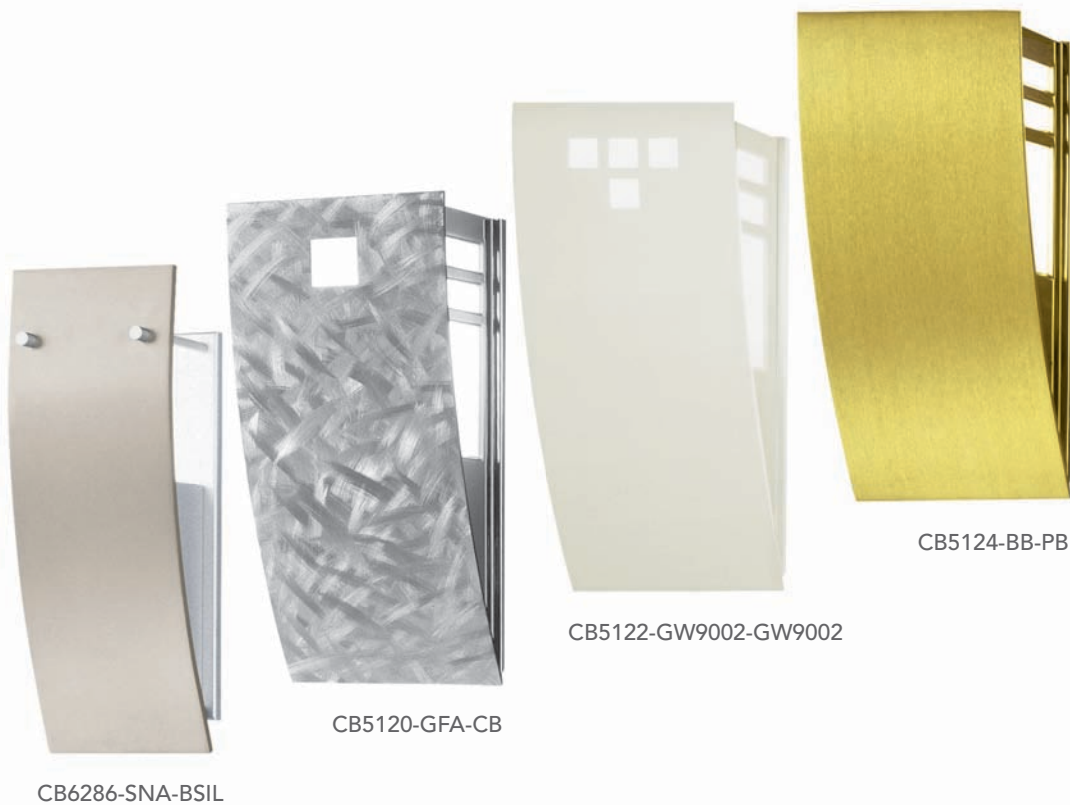

CB6286-SNA-BSIL

CB5120-GFA-CB


CB5122-GW9002-GW9002

CB5124-BB-PB

FEATURES

- 5 year product warranty
- ADA compliant
- Stamped side panels with window relief detail (except CB6286)
- 1/8" thick solid metal rolled face plate
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- 1/8" thick white acrylic diffuser standard with matte finish, UV stable, UL-94 HB flame class rated
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials (except CB6286)
- Wood veneer faces are unfinished for field staining (except CB6286)
- Solid metal accent rods (CB6286 only)
- Easy tool-less relamping
- Fluorescent or incandescent lamplung (CB6286 - incandescent only)
- High power factor electronic ballast (fluorescent lamplung)
- Integral 12 volt dimmable electronic transformer (CB6286 only)
- Clear tempered glass lenses provided for MR16 lamps, integral lens clips accept any 2" diameter lens (CB6286 only)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS

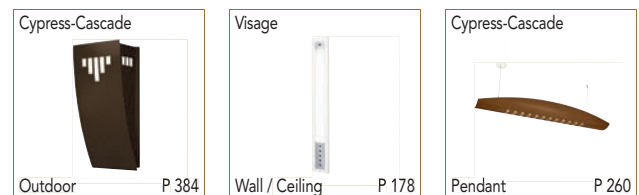

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Mix and match accents and trim from other product designs
- Custom cutout or logo in rolled face plate
- Increase or decrease fixture height and/or width (CB6286 only)
- Wood veneer face (CB6286)
- Alternate diffuser materials (except CB6286)
- Alternative MR16 lens (CB6286 only)
- Fused circuit protection
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty