



SAMPLE CATALOG NUMBER

CB6530 - 1F27(MVOLT) - BB - BMAT - REM
 Model Number Lamping Option (Voltage) Housing Finish Accent Panel Finish Option

Model			Lamping Options	Finish		Options		
Model Number	Dimensions			Housing	Accent Panel			
CB6530 	W	7-1/4" (184 mm)	1F27	PTD	• CB	PTD	• ABA	REM
	H	16" (406 mm)	2LF13	BA	• PB		BC	TC
	D	4" (102 mm)	2N60	BB	• SN		BL	TL
	MC	8" (203 mm)		BCA	SNA		DCC	XEM
				• BCB	• VG		FUSE	XPS
				BU				
CB6532	W	9-1/4" (235 mm)	1F39	PTD	• CB	PTD	• ABA	REM
	H	20" (508 mm)	2LF13	BA	• PB		BC	TC
	D	5-1/8" (130 mm)	2N100	BB	• SN		BL	TL
	MC	10" (254 mm)		BCA	SNA		DCC	XEM
				• BCB	• VG		FUSE	XPS
				BU				

LINE DRAWINGS



ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W Width
- H Height
- D Depth (measured from wall to front of fixture)
- MC Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- F27 27w long twin tube, 2G11 base, FLR (MVOLT; 347V)
- F39 39w long twin tube, 2G11 base, FLR (MVOLT)
- LF13 13w twin tube, 4-pin 2GX7 base, FLR (MVOLT)
- N40 40w A-19, medium base, INC (120V)
- N60 60w A-19, medium base, INC (120V)
- N100 100w A-19, medium base, INC (120V)

Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BB Brushed Brass
- BCA Brushed Chrome Alternative
- BCB Brushed Chrome
- BU Brushed Copper
- CB Polished Chrome
- PB Polished Brass
- SN Satin Nickel
- SNA Satin Nickel Alternative
- VG Verdigris Patina over Copper

Options

- ABA Hand Painted Alabaster Alternative
- BC Closed bottom
- BL Bottom lens, white translucent acrylic
- DCC Damp clear coat required for all metal finishes in damp locations
- FUSE Fusing
- REM Remote emergency battery pack for fluorescent lamping
- TC Closed top, downwatt 2N60 to 2N40 or 2N100 to 2N60
- TL Top lens, white translucent acrylic, downwatt 2N60 to 2N40 or 2N100 to 2N60
- XEM Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
- XPS Express 10 day shipment

PHOTOMETRICS and BIM




Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB6530-1F27	51	01243	405
CB6530-2LF13	28	08005	415
CB6530-2N60	10	33726	426
CB6532-1F39	37	33722	426
CB6532-2LF13	28	08005	415
CB6532-2N100	13	33724	426

See report on indicated page for complete detail

Candela Distribution

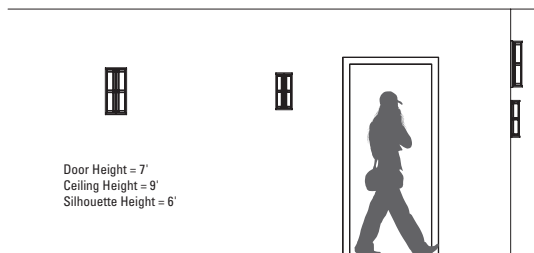



CB6530-BB-BMAT

FEATURES

- 5 year product warranty
- ADA compliant (CB6530 only)
- Solid metal bar trim
- Rolled diffuser accent panel creates a three dimensional effect
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Extruded 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Increase overall length of fixture to 8' maximum
- Add roll bars or rearrange roll bar locations
- Custom window cutout in diffuser accent panel
- Horizontal mounting
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty