


SAMPLE CATALOG NUMBER

CB3550 - 2LF13(MVOLT) - BA - REM
Model Number Lamping Option (Voltage) Finish Option

Model				Lamping Options		Finish		Options	
Model Number	Dimensions								
CB3550 	W	7-1/4"	(184 mm)	1F27 2LF13 2N60		PTD BA BB BCA • BCB	• CB PB • SN SNA • VG	• ABA BC BL DCC FUSE	REM TC TL XEM XPS
	H	16"	(406 mm)						
	D	4"	(102 mm)						
	MC	8"	(203 mm)						
CB3325	W	9-1/4"	(235 mm)	1F39 2LF13 2N100		PTD BA BB BCA • BCB	• CB PB • SN SNA • VG	• ABA BC BL DCC FUSE	REM TC TL XEM XPS
	H	20"	(508 mm)						
	D	5-1/8"	(130 mm)						
	MC	10"	(254 mm)						
CB3552 	W	7-1/4"	(184 mm)	1F27 2LF13 2N60		PTD BA BB BCA • BCB	• CB PB • SN SNA • VG	• ABA BC BL DCC FUSE	REM TC TL XEM XPS
	H	16"	(406 mm)						
	D	4"	(102 mm)						
	MC	8"	(203 mm)						
CB3392	W	9-1/4"	(235 mm)	1F39 2LF13 2N100		PTD BA BB BCA • BCB	• CB PB • SN SNA • VG	• ABA BC BL DCC FUSE	REM TC TL XEM XPS
	H	20"	(508 mm)						
	D	5-1/8"	(130 mm)						
	MC	10"	(254 mm)						
CB3554 	W	7-1/4"	(184 mm)	1F27 2LF13 2N60		PTD BA BB	BCA SNA • VG	• ABA BC BL DCC FUSE	REM TC TL XEM XPS
	H	16"	(406 mm)						
	D	4"	(102 mm)						
	MC	8"	(203 mm)						
CB3396	W	9-1/4"	(235 mm)	1F39 2LF13 2N100		PTD BA BB	BCA SNA • VG	• ABA BC BL DCC FUSE	REM TC TL XEM XPS
	H	20"	(508 mm)						
	D	5-1/8"	(130 mm)						
	MC	10"	(254 mm)						

LINE DRAWINGS


CB3550/CB3325



CB3552/CB3392



CB3554/CB3396



Door Height = 7'
Ceiling Height = 9'
Silhouette Height = 6'

ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS

Dimensions

W	Width
H	Height
D	Depth (measured from wall to front of fixture)
MC	Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

F27	27w long twin tube, 2G11 base, FLR (MVOLT; 347V)
F39	39w long twin tube, 2G11 base, FLR (MVOLT)
LF13	13w twin tube, 4-pin 2GX7 base, FLR (MVOLT)
N40	40w A-19, medium base, INC (120V)
N60	60w A-19, medium base, INC (120V)
N100	100w A-19, medium base, INC (120V)

Specify Voltage or MVOLT
MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

PTD	Painted - specify color code (ex. BRNZ for Bronze)
BA	Brushed Aluminum
BB	Brushed Brass
BCA	Brushed Chrome Alternative
• BCB	Brushed Chrome
• CB	Polished Chrome
PB	Polished Brass
• SN	Satin Nickel
SNA	Satin Nickel Alternative
• VG	Verdigris Patina over Copper

Options

• ABA	Hand Painted Alabaster Alternative
BC	Closed bottom
BL	Bottom lens, white translucent acrylic
DCC	Damp clear coat required for all metal finishes in damp locations
FUSE	Fusing
REM	Remote emergency battery pack for fluorescent lamping
TC	Closed top, downwatt 2N100 to 2N60 or 2N60 to 2N40
TL	Top lens, white translucent acrylic, downwatt 2N100 to 2N60 or 2N60 to 2N40
XEM	Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
XPS	Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB3550-1F27	51	01243	405
CB3550-2LF13	28	08005	415
CB3550-2N60	10	33726	426
CB3325-1F39	37	33722	426
CB3325-2LF13	28	08005	415
CB3325-2N100	13	33724	426
CB3552-1F27	51	01243	405
CB3552-2LF13	28	08005	415
CB3552-2N60	10	33726	426
CB3392-1F39	37	33722	426
CB3392-2LF13	28	08005	415
CB3392-2N100	13	33724	426
CB3554-1F27	51	01243	405
CB3554-2LF13	28	08005	415
CB3554-2N60	10	33726	426
CB3396-1F39	37	33722	426
CB3396-2LF13	28	08005	415
CB3396-2N100	13	33724	426

See report on indicated page for complete detail

Candela Distribution

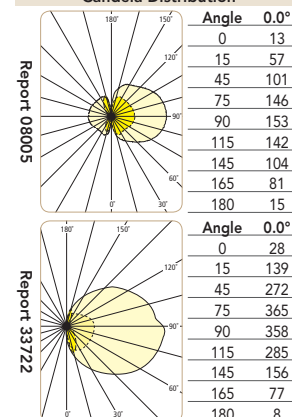

COLONNADE™

INDOOR

DECORATIVE AND
PERFORMANCE

WALL



CB3550-BA



CB3552-BA



CB3554-BA

FEATURES

- 5 year product warranty
- ADA compliant (CB3552, CB3550, CB3554 only)
- Solid metal bar trim
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Extruded 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Increase overall length of fixture to 8' maximum
- Add roll bars or rearrange roll bar locations
- Horizontal mounting
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Add perforated metal overlay



Approved for indoor damp locations.
Metal finishes require DCC (damp clear
coat) for 5 year warranty

VISA LIGHTING
An Oldenburg Group Company
800-788-VISA www.visalighting.com