




SAMPLE CATALOG NUMBER

CB3556 - 2LF13(MVOLT) - BA - REM
 Model Number Lamping Option (Voltage) Finish Option



Model				Lamping Options	Finish	Options
Model Number	Dimensions					
CB3556 	W	7-1/4"	(184 mm)	1F27 2LF13 2N60	PTD • CB BA PB BB • SN BCA SNA • BCB • VG	• ABA REM BC TC BL TL DCC XEM FUSE XPS
	H	16"	(406 mm)			
	D	4"	(102 mm)			
	MC	8"	(203 mm)			
CB3400	W	9-1/4"	(235 mm)	1F39 2LF13 2N100	PTD • CB BA PB BB • SN BCA SNA • BCB • VG	• ABA REM BC TC BL TL DCC XEM FUSE XPS
	H	20"	(508 mm)			
	D	5-1/8"	(130 mm)			
	MC	10"	(254 mm)			
CB3558 	W	7-1/4"	(184 mm)	1F27 2LF13 2N60	PTD • CB BA PB BB • SN BCA SNA • BCB • VG	• ABA REM BC TC BL TL DCC XEM FUSE XPS
	H	16"	(406 mm)			
	D	4"	(102 mm)			
	MC	8"	(203 mm)			
CB3404	W	9-1/4"	(235 mm)	1F39 2LF13 2N100	PTD • CB BA PB BB • SN BCA SNA • BCB • VG	• ABA REM BC TC BL TL DCC XEM FUSE XPS
	H	20"	(508 mm)			
	D	5-1/8"	(130 mm)			
	MC	10"	(254 mm)			

LINE DRAWINGS

CB3556 / CB3400



CB3558 / CB3404

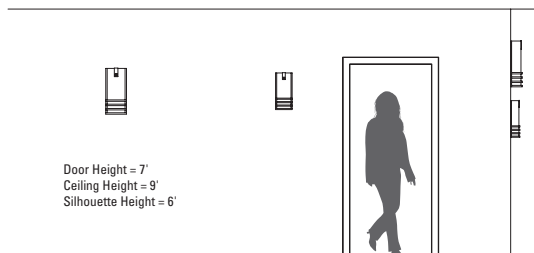

ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W** Width
- H** Height
- D** Depth (measured from wall to front of fixture)
- MC** Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- F27** 27w long twin tube, 2G11 base, FLR (MVOLT; 347V)
- F39** 39w long twin tube, 2G11 base, FLR (MVOLT)
- LF13** 13w twin tube, 4-pin 2GX7 base, FLR (MVOLT)
- N40** 40w A-19, medium base, INC (120V)
- N60** 60w A-19, medium base, INC (120V)
- N100** 100w A-19, medium base, INC (120V)

Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD** Painted - specify color code (ex. BRNZ for Bronze)
- BA** Brushed Aluminum
- BB** Brushed Brass
- BCA** Brushed Chrome Alternative
- **BCB** Brushed Chrome
- **CB** Polished Chrome
- PB** Polished Brass
- **SN** Satin Nickel
- SNA** Satin Nickel Alternative
- **VG** Verdigris Patina over Copper

Options

- **ABA** Hand Painted Alabaster Alternative
- BC** Closed bottom
- BL** Bottom lens, white translucent acrylic
- DCC** Damp clear coat required for all metal finishes in damp locations
- FUSE** Fusing
- REM** Remote emergency battery pack for fluorescent lampping
- TC** Closed top, downwatt 2N100 to 2N60 or 2N60 to 2N40
- TL** Top lens, white translucent acrylic, downwatt 2N100 to 2N60 or 2N60 to 2N40
- XEM** Emergency battery pack mounted in provided recessed box for fluorescent lampping (replaces standard junction box)
- XPS** Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB3556-1F27	51	01243	405
CB3556-2LF13	28	08005	415
CB3556-2N60	10	33726	426
CB3400-1F39	37	33722	426
CB3400-2LF13	28	08005	415
CB3400-2N100	13	33724	426
CB3558-1F27	51	01243	405
CB3558-2LF13	28	08005	415
CB3558-2N60	10	33726	426
CB3404-1F39	37	33722	426
CB3404-2LF13	28	08005	415
CB3404-2N100	13	33724	426

See report on indicated page for complete detail

Candela Distribution

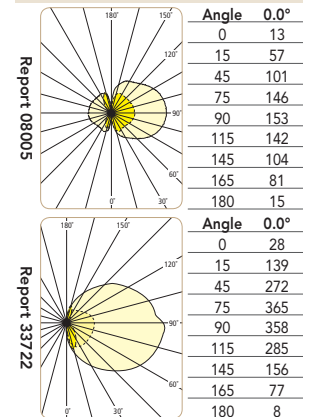

COLONNADE™

INDOOR

DECORATIVE AND PERFORMANCE

WALL



CB3556-BA




CB3558-CB

FEATURES

- 5 year product warranty
- ADA compliant (CB3556 and CB3558 only)
- Solid metal bar trim
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Extruded 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS

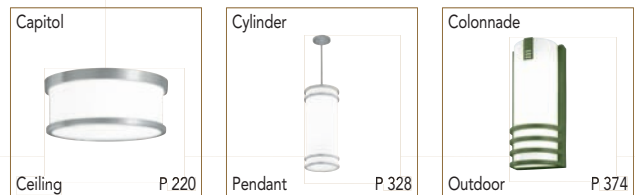

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Increase overall length of fixture to 8' maximum
- Add roll bars or rearrange roll bar locations
- Horizontal mounting
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Add perforated metal overlay



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty