


SAMPLE CATALOG NUMBER

CB6504 - 1FS24(MVOLT) - BSIL - BSIL - XPS
 Model Number Lamping Option (Voltage) Housing Finish End Cap Finish Option


Model		Lamping Options		Finish		Options
Model Number	Dimensions			Housing	End Cap	
FLAMBEAU CB6338	W	3-1/4"	(83 mm)	1F39	PTD	REM XEM XPS
	H	20-1/2"	(521 mm)			
	D	5-1/4"	(133 mm)			
	MC	10-1/4"	(260 mm)			
FLAMBEAU CB6340	W	3-1/4"	(83 mm)	1F40	PTD	REM XEM XPS
	H	26-1/2"	(673 mm)			
	D	5-1/4"	(133 mm)			
	MC	13-1/4"	(337 mm)			
ASTA CB6504	W	23-7/8"	(606 mm)	1FS24	PTD	PTD
	H	3-1/4"	(83 mm)			
	D	4-7/8"	(124 mm)			
	MC	1-5/8"	(41 mm)			
ASTA CB6506	W	35-3/4"	(908 mm)	1FS39	PTD	PTD
	H	3-1/4"	(83 mm)			
	D	4-7/8"	(124 mm)			
	MC	1-5/8"	(41 mm)			
ASTA CB6508	W	47-1/2"	(1207 mm)	1FS54	PTD	PTD
	H	3-1/4"	(83 mm)			
	D	4-7/8"	(124 mm)			
	MC	1-5/8"	(41 mm)			

LINE DRAWINGS

FLAMBEAU
CB6338 / CB6340



ASTA
CB6504 / CB6506 / CB6508



ABBREVIATION KEY


Dimensions	
W	Width
H	Height
D	Depth (measured from wall to front of fixture)
MC	Mounting Center (measured from top of fixture to center of junction box)
Lamping Options (Voltage)	
F39	39w long twin tube, 2G11 base, FLR (MVOLT; 347V)
F40	40w long twin tube, 2G11 base, FLR (MVOLT)
FS24	24w T-5/HO, mini bi-pin base (MVOLT)
FS39	39w T-5/HO, mini bi-pin base (MVOLT)
FS54	54w T-5/HO, mini bi-pin base, FLR (MVOLT; 347V)
Specify Voltage or MVOLT MVOLT is a ballast that operates 120V through 277V	
Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze)
Options	
REM	Remote emergency battery pack for fluorescent lamping
XEM	Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
XPS	Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports		
IES File Number	LER	Report page
CB6504-1FS24	69	
CB6506-1FS39	71	08172 418
CB6508-1FS54	77	


See report on indicated page for complete detail



FLAMBEAU

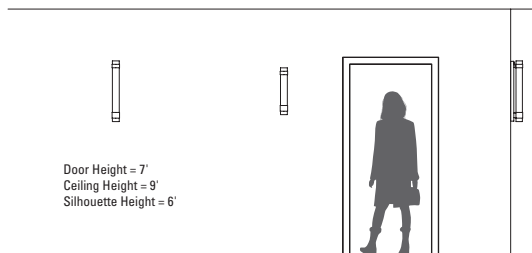

ASTA

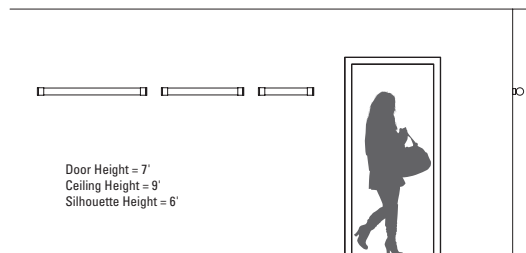

FLAMBEAU™ & ASTA™



Asta can be mounted vertically or horizontally

COMPANIONS



Cane

Ceiling

P 224

Capitol

Ceiling

P 220

FLAMBEAU

FEATURES

- 5 year product warranty
- Heavy gauge fabricated metal backbox
- Oven cured no VOC acrylic powder coat
- Extruded 1/8" thick clear acrylic diffuser with matte finish, F1 rated, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent lamping
- High power factor electronic ballast
- Mounts in vertical orientation to a 2 X 4 single gang electrical box. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed



SUGGESTED VARIATIONS

- Specialty paint finishes to match architectural detail
- Fused circuit protection
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



FLAMBEAU
CB6338-GLIM



ASTA
CB6504-BSIL-BSIL

ASTA

FEATURES

- 5 year product warranty
- Heavy gauge fabricated metal backbox
- Fabricated and welded metal end caps
- Oven cured no VOC acrylic powder coat
- Extruded 1/8" thick clear acrylic diffuser with matte finish, F1 rated, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent lamping
- High power factor electronic ballast
- Can be mounted in vertical or horizontal orientation to a 2 X 4 single gang junction box with provided hardware



SUGGESTED VARIATIONS

- Specialty paint finishes to match architectural detail
- Alternate fluorescent linear lamping
- Fused circuit protection