


SAMPLE CATALOG NUMBER

CB3140 - 1QF26(MVOLT) - GY7005 - MT6033 - XEM
 Model Number Lamping Option (Voltage) Housing Finish Background Finish Option


Model		Lamping Options		Finish		Options	
Model Number	Dimensions			Housing	Background		
CB3140 	W	12"	(305 mm)	1QF26 2QF26 2N75	PTD	PTD	<ul style="list-style-type: none"> • BL REM • DIM-A • TL • DIM-L XEM FUSE XPS
	H	6-1/2"	(165 mm)				
	D	4"	(102 mm)				
	MC	3-1/4"	(83 mm)				
CB3142 	W	24"	(610 mm)	1F40 1F50 2F40 2F50 3N75	PTD	PTD	<ul style="list-style-type: none"> • BL REM • DIM-A • TL • DIM-L XEM FUSE XPS
	H	6-1/2"	(165 mm)				
	D	4"	(102 mm)				
	MC	3-1/4"	(83 mm)				
CB3144 	W	12"	(305 mm)	1QF26 2QF26 2N75	PTD		<ul style="list-style-type: none"> • BL REM • DIM-A • TL • DIM-L XEM FUSE XPS
	H	6-1/2"	(165 mm)				
	D	4"	(102 mm)				
	MC	3-1/4"	(83 mm)				
CB3146 	W	24"	(610 mm)	1F40 1F50 2F40 2F50 3N75	PTD		<ul style="list-style-type: none"> • BL REM • DIM-A • TL • DIM-L XEM FUSE XPS
	H	6-1/2"	(165 mm)				
	D	4"	(102 mm)				
	MC	3-1/4"	(83 mm)				

LINE DRAWINGS


CB3140




CB3142



CB3144



CB3146



ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W** Width
- H** Height
- D** Depth (measured from wall to front of fixture)
- MC** Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- F40** 40w long twin tube, 2G11 base, FLR (MVOLT)
 - F50** 50w long twin tube, 2G11 base, FLR (MVOLT; 347V)
 - QF26** 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
 - N75** 75w A-19, medium base, INC (120V)
- Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD** Painted - specify color code (ex. BRNZ for Bronze)

Options

- **BL** Bottom lens, tempered prismatic glass
- **DIM-A** Fluorescent dimming, Advance Mark 10, specify voltage (not available with F50)
- **DIM-L** Fluorescent dimming, specify voltage
 Lutron Eco-10 (fluorescent except QF26);
 Lutron Compact SE (QF26 only)
- FUSE** Fusing
- REM** Remote emergency battery pack for fluorescent lamping
- **TL** Top lens, tempered prismatic glass, downwatt 2N75 to 2N40
- XEM** Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box). Express 10 day shipment
- XPS** Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB3140-1QF26	47	01240	405
CB3142-2F50	52	01100	404
CB3144-1QF26	47	01240	405
CB3146-2F50	52	01100	404

See report on indicated page for complete detail

Candela Distribution

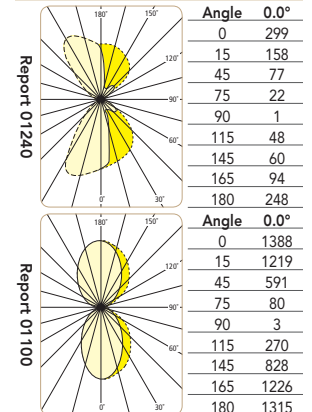


Door Height = 7'
 Ceiling Height = 9'
 Silhouette Height = 6'

LINEAR ART SCONCE™

INDOOR

DECORATIVE AND PERFORMANCE

WALL

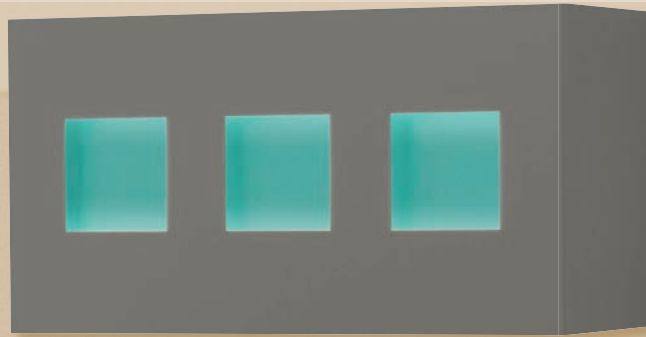


CB3140-GY7005-MT6033



CB3146-AG7038

COMPANIONS

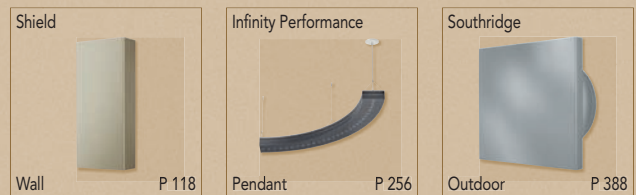

FEATURES

- 5 year product warranty
- ADA compliant
- Heavy gauge fabricated metal housing
- Specular aluminum reflectors to enhance optical performance
- Oven cured no VOC acrylic powder coat
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Increase or decrease housing height and/or width
- Glass insert with etched or silk screened artwork
- Custom window cutout in housing
- Hand Painted Alabaster Alternative or other specialty diffuser material
- Specialty background to match architectural detail (CB3140, CB3142)
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Fluorescent lamping T-5/HO with increased housing width



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty