






SAMPLE CATALOG NUMBER

CB3108 - 2QF26(MVOLT) - PG7032 - NB5022 - XPS
 Model Number Lamping Option (Voltage) Housing Finish Background Finish Option



Model			Lamping Options	Finish		Diffuser Options		Options	
Model Number	Dimensions			Housing	Background				
CB3128 	W	9" (229 mm)	2QF18 2N60T10	PTD	PTD	• AR • PP	• SL • SR	• BL FUSE REM	• TL XEM XPS
	H	9" (229 mm)							
	D	4" (102 mm)							
	MC	4-1/2" (114 mm)							
CB3108 	W	12" (305 mm)	2LF13 2QF26 2N60T10	PTD	PTD	• AR • PP	• SL • SR	• BL DIM-A DIM-L FUSE	REM TL XEM XPS
	H	12" (305 mm)							
	D	4" (102 mm)							
	MC	6" (152 mm)							
CB3130 	W	9" (229 mm)	2QF18 2N60T10	PTD	PTD	• AR • PP	• SL • SR	• BL FUSE REM	• TL XEM XPS
	H	9" (229 mm)							
	D	4" (102 mm)							
	MC	4-1/2" (114 mm)							
CB3110 	W	12" (305 mm)	2LF13 2QF26 2N60T10	PTD	PTD	• AR • PP	• SL • SR	• BL DIM-A DIM-L FUSE	REM TL XEM XPS
	H	12" (305 mm)							
	D	4" (102 mm)							
	MC	6" (152 mm)							

LINE DRAWINGS

CB3128 / CB3108



CB3130 / CB3110

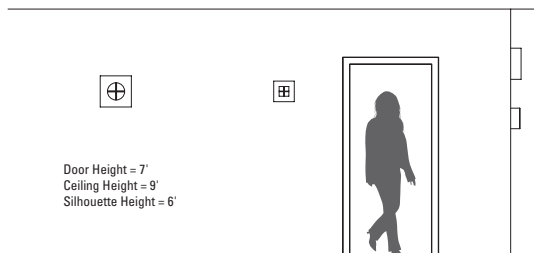

ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W** Width
- H** Height
- D** Depth (measured from wall to front of fixture)
- MC** Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- LF13** 13w twin tube, 4-pin 2GX7 base, FLR (MVOLT)
 - QF18** 18w quad, 4-pin G24q-2 base, FLR (MVOLT; 347V)
 - QF26** 26w quad, 4-pin G24q base, FLR (MVOLT; 347V)
 - N60T10** 60w T-10, medium base, INC (120V)
- Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD** Painted - specify color code (ex. BRNZ for Bronze)

Diffuser Options (see inside back cover)

- **AR** Arctic Crush Lumitor®
- **PP** Paper Leaf Lumitor®
- **SL** Silver Spun Lumitor®
- **SR** Saffron Taipei Lumitor®

Options

- **BL** Bottom lens, tempered prismatic glass
- **DIM-A** Fluorescent dimming, Advance Mark 10, specify voltage (QF26 only)
- **DIM-L** Fluorescent dimming, Compact SE, specify voltage (QF26 only)
- FUSE** Fusing
- REM** Remote emergency battery pack for fluorescent lamping
- **TL** Top lens, tempered prismatic glass, downwatt 2N60 to 2N40
- XEM** Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
- XPS** Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB3128-2QF18	42	01242	405
CB3108-2QF26	34	39226	432
CB3130-2QF18	42	01242	405
CB3110-2QF26	34	39226	432

See report on indicated page for complete detail

Candela Distribution

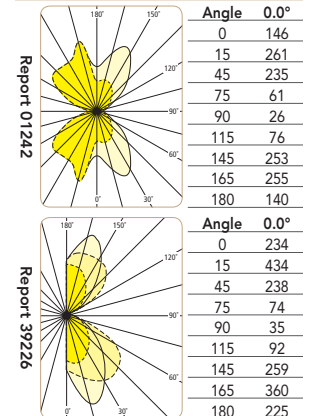

Silver Spun Lumitor® (SL)



ART SCONCE™

INDOOR

DECORATIVE AND PERFORMANCE

WALL



CB3108-PG7032-NB5022



CB3110-AG7038-JB9005

FEATURES

- 5 year product warranty
- ADA compliant
- Heavy gauge fabricated metal housing
- Oven cured no VOC acrylic powder coat
- Easy tool-less relamping
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS

<p>Southridge</p> <p>Outdoor P 388</p>	<p>Linear Art Sconce</p> <p>Wall P 98</p>	<p>Infinity Performance</p> <p>Pendant P 256</p>
--	---	--

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Specialty diffuser material
- Custom window cutout in housing
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Glass insert with extra silk screen artwork



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty