




SAMPLE CATALOG NUMBER

CB4062	-	1LF13(MVOLT)	-	BSIL	-	XPS
Model Number		Lamping Option (Voltage)		Finish		Option


Model				Lamping Options	Finish		Diffuser Options	Options
Model Number	Dimensions							
CB4060 	W	5-1/2"	(140 mm)	1LF13 1N60T10	PTD	BU	• ABA • SL • AR • SR • PP Sandblasted glass standard	DCC REM XEM XPS
	H	11-1/8"	(283 mm)		BA	BZ		
	D	4"	(102 mm)		BB	• VG		
	MC	5-1/2"	(140 mm)					
CB4062	W	5-1/2"	(140 mm)	1LF13 1QF26 2N60	PTD	BU	• ABA • SL • AR • SR • PP Sandblasted glass standard	DCC REM XEM XPS
	H	11-1/8"	(283 mm)		BA	BZ		
	D	6"	(152 mm)		BB	• VG		
	MC	5-1/2"	(140 mm)					
CB4064	W	7"	(178 mm)	2LF13 2QF26 2N75	PTD	BU	• ABA • SL • AR • SR • PP Sandblasted glass standard	DCC REM XEM XPS
	H	14-1/8"	(359 mm)		BA	BZ		
	D	7-3/4"	(197 mm)		BB	• VG		
	MC	7"	(178 mm)					
CB4066 	W	5-1/2"	(140 mm)	1LF13 1N60T10	PTD	BU	• ABA • SL • AR • SR • PP Sandblasted glass standard	DCC REM XEM XPS
	H	11-1/8"	(283 mm)		BA	BZ		
	D	4"	(102 mm)		BB	• VG		
	MC	5-1/2"	(140 mm)					
CB4068	W	5-1/2"	(140 mm)	1LF13 1QF26 2N60	PTD	BU	• ABA • SL • AR • SR • PP Sandblasted glass standard	DCC REM XEM XPS
	H	11-1/8"	(283 mm)		BA	BZ		
	D	6"	(152 mm)		BB	• VG		
	MC	5-1/2"	(140 mm)					
CB4070	W	7"	(178 mm)	2LF13 2QF26 2N75	PTD	BU	• ABA • SL • AR • SR • PP Sandblasted glass standard	DCC REM XEM XPS
	H	14-1/8"	(359 mm)		BA	BZ		
	D	7-3/4"	(197 mm)		BB	• VG		
	MC	7"	(178 mm)					

LINE DRAWINGS


CB4060




CB4062 / CB4064



CB4066



CB4068 / CB4070



Door Height = 7'
Ceiling Height = 9'
Silhouette Height = 6'

ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS

Dimensions	
W	Width
H	Height
D	Depth (measured from wall to front of fixture)
MC	Mounting Center (measured from top of fixture to center of junction box)
Lamping Options (Voltage)	
LF13	13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
QF26	26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
N60	60w A-19, medium base, INC (120V)
N60T10	60w T-10, med base, INC (120V)
N75	75w A-19, medium base, INC (120V)
Specify Voltage or MVOLT	
MVOLT is a ballast that operates 120V through 277V	

Finishes (see inside back cover)

PTD	Painted - specify color code (ex. BRNZ for Bronze)
BA	Brushed Aluminum
BB	Brushed Brass
BU	Brushed Copper
BZ	Brushed Bronze
• VG	Verdigris Patina over Copper

Diffuser Options (see inside back cover)

• ABA	Hand Painted Alabaster Alternative
• AR	Arctic Crush Lumicor®
• PP	Paper Leaf Lumicor®
• SL	Silver Spun Lumicor®
• SR	Saffron Taipei Lumicor®
Note: Sandblasted glass diffuser is standard unless other diffuser option is specified.	
Shadow panels are not included in fixtures with Lumicor® diffusers	

Options

DCC	Damp clear coat required for all metal finishes in damp locations
REM	Remote emergency battery pack for fluorescent lamping
XEM	Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
XPS	Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB4060-1LF13	18	01990	406
CB4062-1LF13	18	01990	406
CB4062-1QF26	29	01989	406
CB4062-2N60	5	01991	407
CB4064-2QF26	30	08016	415
CB4064-2N75	6		
CB4066-1LF13	18	01990	406
CB4068-1LF13	18	01990	406
CB4068-1QF26	29	01989	406
CB4068-2N60	5	01991	407
CB4070-2QF26	30	08016	415
CB4070-2N75	6		

See report on indicated page for complete detail

Candela Distribution

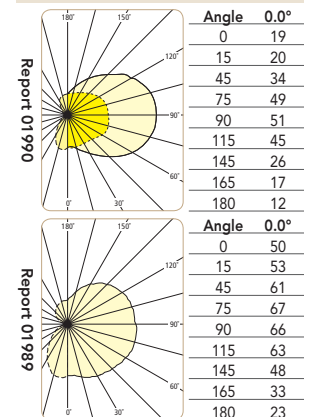

ST. GERMAIN™

INDOOR

DECORATIVE AND
PERFORMANCE

WALL



CB4062-BSIL



CB4068-GSIL

FEATURES

- 5 year product warranty
- ADA compliant (CB4060 and CB4066 only)
- Fabricated metal housing with internal reinforcing corner extrusions
- Internal shadow panel creates a three dimensional effect
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- Tempered sandblasted glass side, top and bottom panels
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Hand Painted Alabaster Alternative or other specialty diffuser material
- Custom window cutout in housing panels
- Increase or decrease housing height and/or width
- Silk screened logo on window panels
- Alternate lamping up to rated wattage listed
- Can accommodate Metal Halide lamping up to 70w with remote ballast
- Add fluorescent dimming ballast
- Fused circuit protection



Approved for indoor damp locations.
Metal finishes require DCC (damp clear
coat) for 5 year warranty



800-788-VISA www.visalighting.com