


SAMPLE CATALOG NUMBER

CB3030 - 2LF13(MVOLT) - SA - REM
 Model Number Lamping Option (Voltage) Finish Option


Model				Lamping Options	Finish	Options
Model Number	Dimensions					
CB3030	W	9-3/4"	(248 mm)	2LF13 1N60	SA	REM XEM
	H	9-3/4"	(248 mm)			
	D	4-7/8"	(124 mm)			
	MC	3-1/4"	(83 mm)			
CB3032	W	18"	(457 mm)	1QF13 1N60	SA	REM
	H	6-3/4"	(171 mm)			
	D	9"	(229 mm)			
	MC	2-5/8"	(67 mm)			
CB3034	W	13"	(330 mm)	1QF13 1N60	SA	REM
	H	6-1/2"	(165 mm)			
	D	6-1/2"	(165 mm)			
	MC	2-3/4"	(70 mm)			

LINE DRAWINGS


CB3030



CB3032



CB3034




ABBREVIATION KEY

Dimensions	
W	Width
H	Height
D	Depth (measured from wall to front of fixture)
MC	Mounting Center (measured from top of fixture to center of junction box)
Lamping Options (Voltage)	
LF13	13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
QF13	13w quad, 4-pin G24q-1 base, FLR (MVOLT; 347V)
N60	60w A-19, medium base, INC (120V)
Specify Voltage or MVOLT MVOLT is a ballast that operates 120V through 277V	
Finishes (see inside back cover)	
SA	Natural Spanish Alabaster (veining will vary from piece to piece)
Options	
REM	Remote emergency battery pack for fluorescent lampping
XEM	Emergency battery pack mounted in provided recessed box for fluorescent lampping (replaces standard junction box).

BIM

Complete BIM (Building Information Modeling) for these models may be downloaded from www.visalighting.com

Door Height = 7'
 Ceiling Height = 9'
 Silhouette Height = 6'

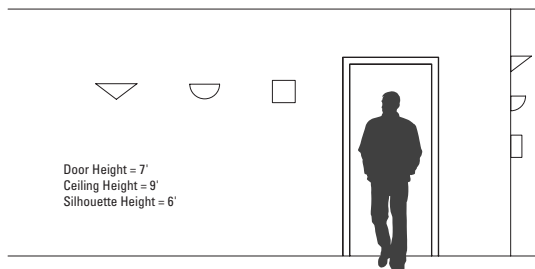

ALABASTER™


INDOOR

DECORATIVE AND
PERFORMANCE

WALL



CB3032-SA

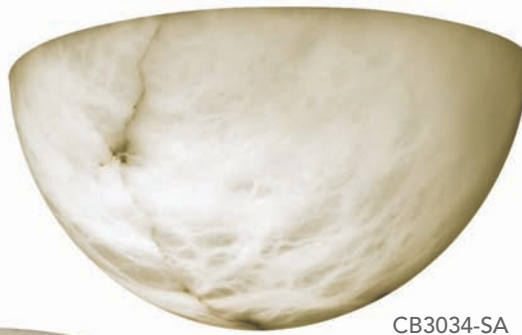

CB3034-SA



CB3030-SA

FEATURES

- 5 year product warranty
- Natural Spanish Alabaster diffuser
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

SUGGESTED VARIATIONS

- Fused circuit protection
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear
coat) for 5 year warranty