




SAMPLE CATALOG NUMBER						
CB6056	-	2TF42(MVOLT)	-	AG7038	-	XEM
Model Number		Lamping Option (Voltage)		Finish		Option


Model		Lamping Options		Finish	Diffuser Options	Options	
Model Number	Dimensions						
CB6054 	W	17-3/4"	(451 mm)	1F27 2N60T10	PTD	<ul style="list-style-type: none"> • AR • PP • SL • SR White acrylic standard	FUSE REM • TL XEM XPS
	H	8"	(203 mm)				
	D	4"	(102 mm)				
	MC	2-1/4"	(56 mm)				
CB6056	W	24"	(610 mm)	2F39 ※2TF42 2N150 1PH100	PTD	<ul style="list-style-type: none"> • AR • PP • SL • SR White acrylic standard	FUSE • TL QRS XEM REM XPS
	H	10"	(254 mm)				
	D	7"	(178 mm)				
	MC	2-1/4"	(56 mm)				
CB6058 	W	17-3/4"	(451 mm)	1F27 2N60T10	PTD	<ul style="list-style-type: none"> • AR • PP • SL • SR White acrylic standard	FUSE REM • TL XEM XPS
	H	8"	(203 mm)				
	D	4"	(102 mm)				
	MC	2-1/4"	(56 mm)				
CB6060	W	24"	(610 mm)	2F27 2F39 ※2TF42 2N150 1PH100	PTD	<ul style="list-style-type: none"> • AR • PP • SL • SR White acrylic standard	FUSE • TL QRS XEM REM XPS
	H	10"	(254 mm)				
	D	7"	(178 mm)				
	MC	2-1/4"	(56 mm)				

LINE DRAWINGS

CB6054 / CB6056



CB6058 / CB6060



ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- ※ Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattage allowed

Dimensions

W	Width
H	Height
D	Depth (measured from wall to front of fixture)
MC	Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

F27	27w long twin tube, 2G11 base, FLR	(MVOLT; 347V)
F39	39w long twin tube, 2G11 base, FLR	(MVOLT; 347V)
※ TF26	26w triple, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
※ TF32	32w triple, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
※ TF42	42w triple, 4-pin GX24q-4 base, FLR	(MVOLT; 347V)
N40T10	40w T-10, medium base, INC	(120V)
N60	60w A-19, medium base, INC	(120V)
N60T10	60w T-10, medium base, INC	(120V)
N150	150w A-21, medium base, INC	(120V)
CH39T4	39w T-4, G8.5 base, ceramic MH	(MTAP)
CH70T4	70w T-4, G8.5 base, ceramic MH	(MTAP; 347V)
PH100	100w ED-17, medium base, pulse start MH	(MTAP; 347V)
T250	250w T-4, mini-can base, halogen	(120V)

Specify Voltage, MVOLT or MTAP
MVOLT is a ballast that operates 120V through 277V
MTAP is a ballast that operates 120V or 277V
A clear lamp is required for XP Optics

Finishes (see inside back cover)

PTD Painted - specify color code (ex. BRNZ for Bronze)

Diffuser Options (see inside back cover)

- **AR** Arctic Crush Lumicor®
 - **PP** Paper Leaf Lumicor®
 - **SL** Silver Spun Lumicor®
 - **SR** Saffron Taipei Lumicor®
- Note: White acrylic diffuser is standard unless other diffuser option is specified

Options

- FUSE** Fusing
- QRS** Quartz restrike, 100w T-4 dc bayonet base, specify voltage
- REM** Remote emergency battery pack for fluorescent lamping
- **TL** Top lens, tempered prismatic glass, downwatt 2N60 to 2N40 or 2N150 to 2N60. Not available with F39, ceramic metal halide or T250 lamping. Standard with pulse start metal halide lamping
- XEM** Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
- XPS** Express 10 day shipment

PHOTOMETRICS and BIM



Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB6054-1F27	50	05083	410
CB5056-2F39	63	05085	410
CB5056-2TF42	56	05086	410
CB5056-1PH100	57	05087	410
CB5056-1T250	13	11066	421
CB5056-2T250	15	11065	421
CB6058-1F27	50	05083	410
CB5060-2F39	63	05085	410
CB5060-2TF42	56	05086	410
CB5060-1PH100	57	05087	410
CB5060-1T250	13	11066	421
CB5060-2T250	15	11065	421


See report on indicated page for complete detail

Candela Distribution



XP OPTICS™

T4 lamping includes high performance XP Optics module of specular extruded aluminum with integral borosilicate glass lens. +/- 10° tilt provided for uplight aiming. Use clear lamp for maximum optical performance.



Door Height = 7'
Ceiling Height = 9'
Silhouette Height = 6'



CB6056-AG7038




CB6060-COPR

FEATURES

- 5 year product warranty
- ADA compliant (CB6054 and CB6058)
- Heavy gauge fabricated metal housing
- Oven cured no VOC acrylic powder coat
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- 1/8" thick white acrylic diffuser standard with matte finish, UV stable, UL-94 HB flame class rated (CB6058 and CB6060)
- Easy tool-less relamping
- Fluorescent, HID or incandescent lamping
- Use coated lamps for incandescent or pulse start metal halide lamps
- Use clear lamps for tungsten and ceramic metal halide
- Clear tempered prismatic glass top lens standard with HID lamping
- High power factor electronic ballast (fluorescent lamping)
- Remote mounted high power factor HID ballast with long distance ignitor standard, 50' maximum ballast to lamp distance (10' maximum CH39 lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. Requires auxiliary mounting fasteners (provided). XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed
- XP Optics™. Extruded aluminum high performance reflector system for maximum efficiency. Reflectors are computer optimized for maximum forward throw and produce smooth, uniform surface illumination

COMPANIONS

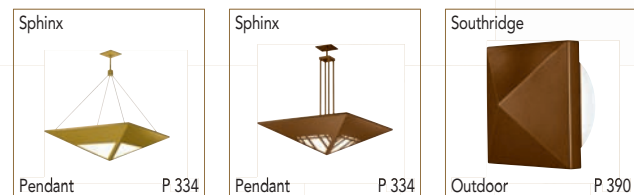

SUGGESTED VARIATIONS

- Specialty paint finishes to match architectural detail
- Mix and match accents and trim from other product designs
- Hand Painted Alabaster Alternative acrylic diffuser
- Custom window cutout or logo
- Add fluorescent dimming ballast
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty