


SAMPLE CATALOG NUMBER
 CB2510 - 2LF13(MVOLT) - PG7032 - REM
 Model Number Lamping Option (Voltage) Finish Option

| Model | | | | Lamping Options | Finish | Options |
|---------------|------------|--------|----------|--|-------------------------|--|
| Model Number | Dimensions | | | | | |
| CB2510 | W | 16" | (406 mm) | 2LF13 2N100 1CH39T4 1CH70T4 1T250 | PTD BA | DCC REM XPS |
| | H | 5-3/4" | (146 mm) | | | |
| | D | 8" | (203 mm) | | | |
| | MC | 2-7/8" | (73 mm) | | | |

LINE DRAWINGS

CB2510



ABBREVIATION KEY

| Dimensions | |
|------------|--|
| W | Width |
| H | Height |
| D | Depth (measured from wall to front of fixture) |
| MC | Mounting Center (measured from top of fixture to center of junction box) |

| Lamping Options (Voltage) | |
|---------------------------|---|
| LF13 | 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT) |
| N100 | 100w A-19, medium base, INC (120V) |
| CH39T4 | 39w T-4, G8.5 base, ceramic MH (MTAP) |
| CH70T4 | 70w T-4, G8.5 base, ceramic MH (MTAP; 347V) |
| T250 | 250w T-4, mini-can base, halogen (120V) |

Specify Voltage, MVOLT or MTAP
 MVOLT is a ballast that operates 120V through 277V
 MTAP is a ballast that operates 120V or 277V
 A clear lamp is required for XP Optics

| Finishes (see inside back cover) | |
|----------------------------------|--|
| PTD | Painted - specify color code (ex. BRNZ for Bronze) |
| BA | Brushed Aluminum |

| Options | |
|------------|---|
| DCC | Damp clear coat required for all metal finishes in damp locations |
| REM | Remote emergency battery pack for fluorescent lampping |
| XPS | Express 10 day shipment |



PHOTOMETRICS and BIM

Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

| Reports | | |
|-----------------|-----|-------------|
| IES File Number | LER | Report page |
| CB2510-2LF13 | 47 | 33813 427 |
| CB2510-2N100 | 11 | 33376 425 |
| CB2510-1T250 | 13 | 11066 421 |

See report on indicated page for complete detail

Candela Distribution

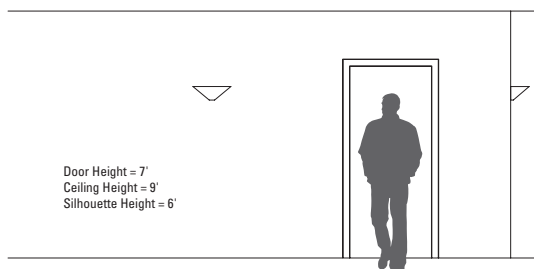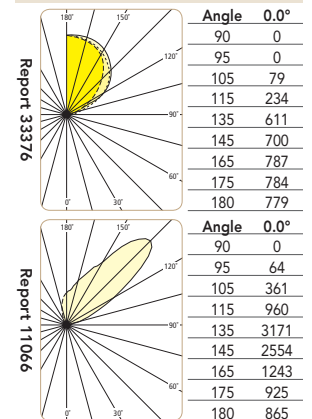

XP OPTICS™

T4 lampping includes high performance XP Optics module of specular extruded aluminum with integral borosilicate glass lens. +/- 10° tilt provided for uplight aiming. Use clear lamp for maximum optical performance.





CB2510-PG7032

FEATURES

- 5 year product warranty
- Heavy gauge spun metal housing
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent or incandescent lampholder
- High power factor electronic ballast (fluorescent lampholder)
- Remote mounted HID ballast with long distance ignitor standard, 50' maximum ballast to lamp distance (10' maximum CH39 lampholder)
- Mounts to standard electrical junction box (by others) with provided hardware
- XP Optics™. Extruded aluminum high performance reflector system for maximum efficiency. Reflectors are computer optimized for maximum forward throw and produce smooth, uniform surface illumination

COMPANIONS



SUGGESTED VARIATIONS

- Specialty materials and finishes to match architectural detail
- Mix and match accents and trim from other product designs
- Fluorescent lampholder up to (2) 26w CF
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty