


SAMPLE CATALOG NUMBER

CB5044	-	2LF13(MVOLT)	-	BCB	-	REM
Model Number		Lamping Option (Voltage)		Finish		Option


Model				Lamping Options	Finish	Options
Model Number	Dimensions					
CB3060	W	12"	(200 mm)	2QF13 2N60	PTD BCB CB PB SN	DCC
	H	5-1/2"	(483 mm)			
	D	13-1/2"	(102 mm)			
	MC	3-1/2"	(241 mm)			
CB5044	W	18"	(457 mm)	2LF13 2N100	PTD BCB CB PB SN	DCC REM
	H	7-7/8"	(200 mm)			
	D	20"	(508 mm)			
	MC	5-1/2"	(140 mm)			

LINE DRAWINGS

CB3060



CB5044



ABBREVIATION KEY

Dimensions	
W	Width
H	Height
D	Depth (measured from wall to front of fixture)
MC	Mounting Center (measured from top of fixture to center of junction box)
Lamping Options (Voltage)	
LF13	13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
QF13	13w quad, 4-pin G24q-1 base, FLR (MVOLT)
N60	60w A-19, medium base, INC (120V)
N100	100w A-19, medium base, INC (120V)
Specify Voltage or MVOLT MVOLT is a ballast that operates 120V through 277V	
Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze)
BCB	Brushed Chrome
CB	Polished Chrome
PB	Polished Brass
SN	Satin Nickel
Options	
DCC	Damp clear coat required for all metal finishes in damp locations
REM	Remote emergency battery pack for fluorescent lamphing

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB3060-2N60	12	34411	429
CB5044-2LF13	69	34077	429
CB5044-2N100	12	34078	429

See report on indicated page for complete detail

Candela Distribution

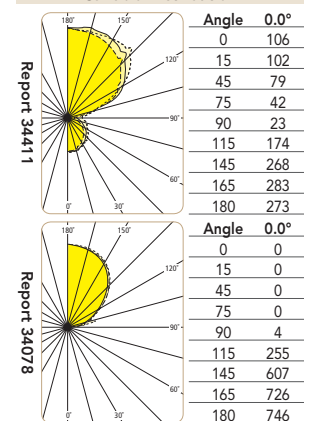

Door Height = 7'
Ceiling Height = 9'
Silhouette Height = 6'



FEATURES

- 5 year product warranty
- Heavy gauge spun metal housing (CB5044)
- 1/4" thick glass accent lens floats above top rim of bowl (CB5044)
- Hand blown cased white glass diffuser (CB3060)
- Solid machined metal components
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard octagonal electrical junction box (by others) and requires structural blocking (by others) with provided auxiliary mounting hardware

COMPANIONS



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear
coat) for 5 year warranty