


SAMPLE CATALOG NUMBER

CB3618 - 2LF13(MVOLT) - BSIL - CB - XEM
 Model Number Lamping Option (Voltage) Housing Finish Accent Ring Finish Option



Model				Lamping Options		Finish		Options	
Model Number	Dimensions					Housing	Accent Ring		
MIAMI CB3430	W	12-1/2"	(318 mm)	2F9				PTD	• ABA
	H	6"	(152 mm)	2N40				• CB	DCC
	D	6"	(152 mm)					PB	REM
	MC	2-1/4"	(57 mm)						XPS
MIAMI CB3432	W	16-1/2"	(419 mm)	2QF26				PTD	• ABA
	H	7-7/8"	(200 mm)	2N60				• CB	DCC
	D	8-3/8"	(213 mm)	2LF13				PB	• TL
	MC	2-7/8"	(73 mm)	2TF26					• DIM-A
									FUSE
									XPS
MIAMI ID CB3616	W	14-1/4"	(362 mm)	2LF13	1PH150	PTD	• CB	PTD	FUSE
	H	6"	(152 mm)	1QF18	1CH39T4	BA	PB	• BCB	DCC
	D	7"	(178 mm)	1QF26	1CH70T4	• BCB	• SN	• CB	REM
	MC	2-7/8"	(73 mm)	2N100	1T250			PB	• TL
				1PH100				• SN	XEM
									XPS
MIAMI ID CB3618	W	18"	(457 mm)	2LF13	1CH39T4	PTD	• CB	PTD	FUSE
	H	6-1/2"	(165 mm)	2QF18	1CH70T4	BA	PB	• BCB	DCC
	D	9"	(229 mm)	2QF26	1CH150T6	• BCB	• SN	• CB	REM
	MC	2-7/8"	(73 mm)	2N150	1T250			PB	• TL
				1PH100	2T250			• SN	XEM
				1PH150					XPS

LINE DRAWINGS

MIAMI (Luminous)
CB3430 / CB3432



MIAMI ID (Indirect)
CB3616 / CB3618

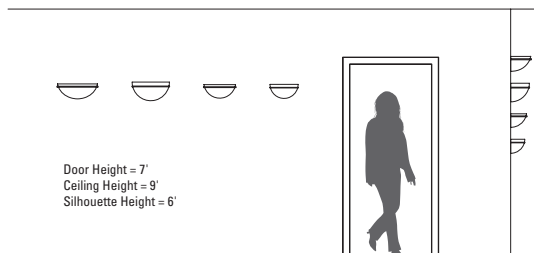

ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions	
W	Width
H	Height
D	Depth (measured from wall to front of fixture)
MC	Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)		
F9	9w twin tube, G23 base, FLR	(120V; 277V)
LF13	13w twin tube 4-pin, 2GX7 base, FLR	(MVOLT)
QF18	18w quad, 4-pin G24q-2 base, FLR	(MVOLT)
QF26	26w quad, 4-pin G24q-3 base, FLR	(MVOLT; 347V)
TF26	26w triple, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
N40	40w A-19, medium base, INC	(120V)
N60	60w A-19, medium base, INC	(120V)
N150	150w A-21, medium base, INC	(120V)
CH39T4	39w T-4, G8.5 base, ceramic MH	(MVOLT)
CH70T4	70w T-4, G8.5 base, ceramic MH	(MVOLT)
CH150T6	150w T-6, G12 base, ceramic MH	(MVOLT)
PH100	100w ED-17, medium base, pulse start MH	(MTAP; 347V)
PH150	150w ED-17, medium base, pulse start MH	(MTAP; 347V)
T250	250w T-4, mini-can base, halogen	(120V)

Specify Voltage, MVOLT or MTAP
 MVOLT is a ballast that operates 120V through 277V
 MTAP is a ballast that operates 120V or 277V
 A clear lamp is required for XP Optics

Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze)
BA	Brushed Aluminum
• BCB	Brushed Chrome
• CB	Polished Chrome
PB	Polished Brass
• SN	Satin Nickel


Options	
• ABA	Hand Painted Alabaster Alternative
DCC	Damp clear coat required for all metal finishes in damp locations
• DIM-A	Fluorescent dimming, Advance Mark 10, specify voltage (available only with QF26 or TF26 lamping)
FUSE	Fusing
REM	Remote emergency battery pack for fluorescent lamping
• TL	Top lens, tempered prismatic glass, downwatt 2N100 to 2N60 or 2N150 to 2N60. Not available with T250 or CH150T6 lamping
XEM	Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
XPS	Express 10 day shipment

PHOTOMETRICS and BIM

Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com


Reports			
IES File Number	LER	Report	page
CB3430-2F9	40		
CB3430-2N40	11		
CB3432-2LF13	44	01703	406
CB3432-2N60	12	01704	406
CB3616-1QF26	47		
CB3616-2N100	11	33376	425
CB3616-1T250	13	11066	421
CB3618-2LF13	51	33814	427
CB3618-2QF26	39	01234	405
CB3618-2N150	13	33377	426
CB3618-1CH150T6	43	10834	421
CB3618-1T250	13	11066	421
CB3618-2T250	15	11065	421

See report on indicated page for complete detail

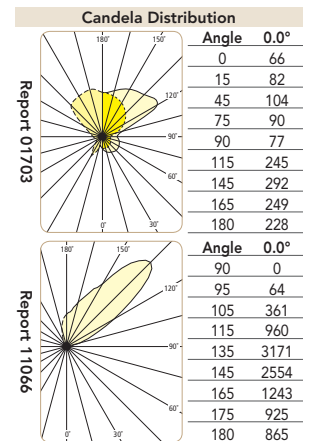

XP OPTICS™

T4 lamping includes high performance XP Optics module of specular extruded aluminum with integral borosilicate glass lens. +/- 10° tilt provided for uplight aiming. Use clear lamp for maximum optical performance.



MIAMI™ & MIAMI ID™

INDOOR

DECORATIVE AND
PERFORMANCE

WALL



MIAMI (Luminous)
CB3430-CB



MIAMI ID (Indirect)
CB3618-BSIL-CB

FEATURES

- 5 year product warranty
- Thermally formed 1/8" thick white acrylic diffuser standard with matte finish, UV stable, UL-94 HB flame class rated (CB3430 and CB3432)
- Heavy gauge spun metal housing (CB3616 and CB3618)
- Heavy gauge rolled ring
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent, HID or incandescent lampping
- High power factor electronic ballast (fluorescent lampping, except CB3430)
- Remote mounted HID ballast with long distance ignitor standard, 50' maximum ballast to lamp distance (10' maximum with CH39 lampping).
- XP Optics™. Extruded aluminum high performance reflector system for maximum efficiency. Reflectors are computer optimized to maximum forward throw and produce smooth, uniform surface illumination for tungsten halogen lampping
- Clear tempered prismatic glass top lens standard with HID lampping
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Mix and match accents and trim from other product designs
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Alternate lampping up to rated wattage listed



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty