


SAMPLE CATALOG NUMBER

CM1783 - 6F40(MVOLT) - TW9016 - IR - HH - XPS
 Model Number Lamping Option (Voltage) Finish Diffuser Option Mounting Option Option

Model Number		Dimensions		Lamping Options	Finish	Diffuser Options	Mounting Options	Options
CM1782	W H	23-1/8" 7-3/8"	(587 mm) (187 mm)	4F39	PTD	• AC IR Prismatic acrylic standard	HH HH/CP1 HH/CP2	4F39L IEM • DIM-A LRS • DIM-L WGD FUSE XPS
CM1783	W H	31-1/8" 7-7/8"	(791 mm) (200 mm)	6F40 8F40	PTD	• AC IR Prismatic acrylic standard	HH HH/CP1 HH/CP2	6F40L IEM 8F40L LRS • DIM-A WGD • DIM-L XPS FUSE


LINE DRAWINGS

CM1782 / CM1783





HH option increases H (height) dimension by 3-3/4",
 WGD option increases H (height) dimension by 1-5/8"

CM1782-HH



CM1782-WGD

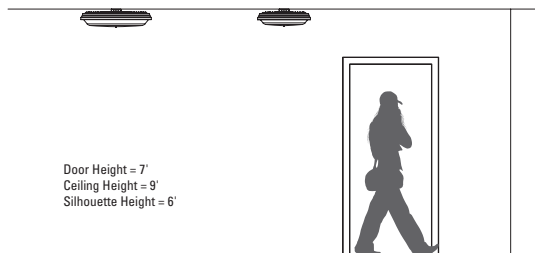

ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS

Dimensions

W Width
 H Height

Lamping Options (Voltage)

F39 39w long twin tube, 2G11 base, FLR (MVOLT; 347V)
F40 40w long twin tube, 2G11 base, FLR (MVOLT; 347V)
 Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

PTD Painted - specify color code (ex. BRNZ for Bronze)

Diffuser Options (see inside back cover)

- **AC** Opal white acrylic
- IR** Impact resistant DR pattern 12 acrylic
 Note: Prismatic acrylic diffuser is standard unless other diffuser option is specified

Mounting Options

HH Hook hung
HH/CP1 Hook hung with 120V NEMA L5-15P plug, single circuit
HH/CP2 Hook hung with 277V NEMA L7-15P plug, single circuit
 Note: **HH** option increases H (height) dimension by 3-3/4"

Options

- 4F39L** Include 39w lamps (3500K standard)
- 6F40L** Include 40w lamps (3500K standard)
- 8F40L** Include 40w lamps (3500K standard)
- **DIM-A** Fluorescent dimming, Advance Mark 10, specify voltage
- **DIM-L** Fluorescent dimming, Lutron Eco-10, single circuit, specify voltage (not available with IEM or plug connection)
- FUSE** Fusing
- IEM** Integral emergency battery pack for fluorescent lamping (not available with DIM-L, CP1, CP2 or 347V)
- LRS** Lens retention system
- WGD** Wire guard (white only).
 Addition of WGD option increases H (height) dimension by 1-5/8"
- XPS** Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CM1782-4F39	41	09001	418
CM1783-8F40	72	08969	418

See report on indicated page for complete detail

Candela Distribution

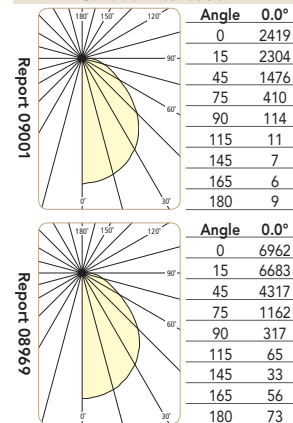

MIDBAY™

INDOOR

DECORATIVE AND PERFORMANCE



CM1783-TW9016

CEILING

FEATURES

- 5 year product warranty
- Heavy gauge spun steel ventilated housing
- Oven cured no VOC acrylic powder coat
- Clear prismatic pattern 12 acrylic diffuser
- Surface mount has dual level switching wiring standard (not available with CP1 or CP2 options)
- Easy tool-less relamping
- Hook hung provided with quick connect mounting hardware, junction box plate and hook for simple installation
- Hook hung mounting options are provided with installed 4-wire cord, 36" length dual level switching capable)
- High power factor electronic ballast
- Standard surface mount attaches to either 4" square or octagonal junction box.

COMPANIONS



SUGGESTED VARIATIONS

- Fluorescent lamping variations up to maximum specified on standard options
- 2 circuit dimming with 2 power cords (hook hung option)
- Factory installed plug for modular wiring systems installation
- Provide 4 wire plug connection for DIM-L or IEM installation w/ cord and plug wiring (single circuit, hook hung option)
- Alternate diffuser options



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty