


SAMPLE CATALOG NUMBER

CM1566 - 1TF32(MVOLT) - GLIM - OBRZ - XPS
 Model Number Lamping Option (Voltage) Housing Finish Accent Panel Finish Option


Model		Lamping Options		Finish		Diffuser Options		Options	
Model Number	Dimensions			Housing	Accent Panel				
CM1566	W 6-3/4" (171 mm)	※1TF32 1N60		PTD BA BB	BU BZ •VG	PTD	•ABA •AR •PP	•SL •SR	DCC REM XPS
	H 8-3/4" (222 mm)								
White acrylic standard									
CM1590	W 14-1/8" (359 mm)	2LF13 2QF26 2N40		PTD BA BB	BU BZ •VG	PTD	•ABA •AR •PP	•SL •SR	DCC REM XEM XPS
	H 5-7/8" (149 mm)								
White acrylic standard									

LINE DRAWINGS

CM1566



CM1590



ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- ※ Configuration operates TF26 or TF32 lamp options and can be labeled up to the highest wattage allowed

Dimensions

W Width
 H Height

Lamping Options (Voltage)

- LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
 - QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT)
 - ※TF26 26w triple, 4-pin GX24q-3 base, FLR (MVOLT)
 - ※TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT)
 - N40 40w A-19, medium base, INC (120V)
 - N60 60w A-19, medium base, INC (120V)
- MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BB Brushed Brass
- BU Brushed Copper
- BZ Brushed Bronze
- VG Verdigris Patina over Copper

Diffuser Options (see inside back cover)

- ABA Hand Painted Alabaster Alternative
 - AR Arctic Crush Lumicor®
 - PP Paper Leaf Lumicor®
 - SL Silver Spun Lumicor®
 - SR Saffron Taipei Lumicor®
- Note: White acrylic diffuser is standard unless other diffuser option is specified

Options

- DCC Damp clear coat required for all metal finishes in damp locations
- REM Remote emergency battery pack for fluorescent lampping
- XEM Emergency battery pack mounted in provided recessed box for fluorescent lampping (replaces standard junction box)
- XPS Express 10 day shipment

PHOTOMETRICS and BIM



Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports


IES File Number	LER	Report	page
CM1566-1TF32	41	07997	414
CM1590-2QF26	26	08109	417

See report on indicated page for complete detail

Candela Distribution

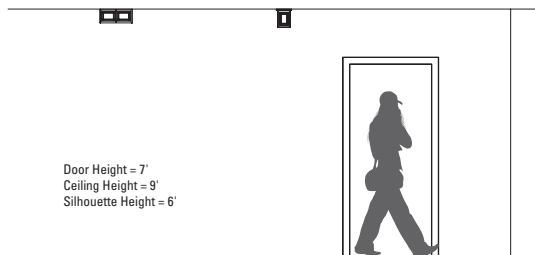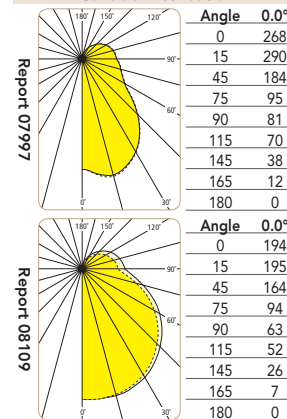

MIDLAND CRAFTS™

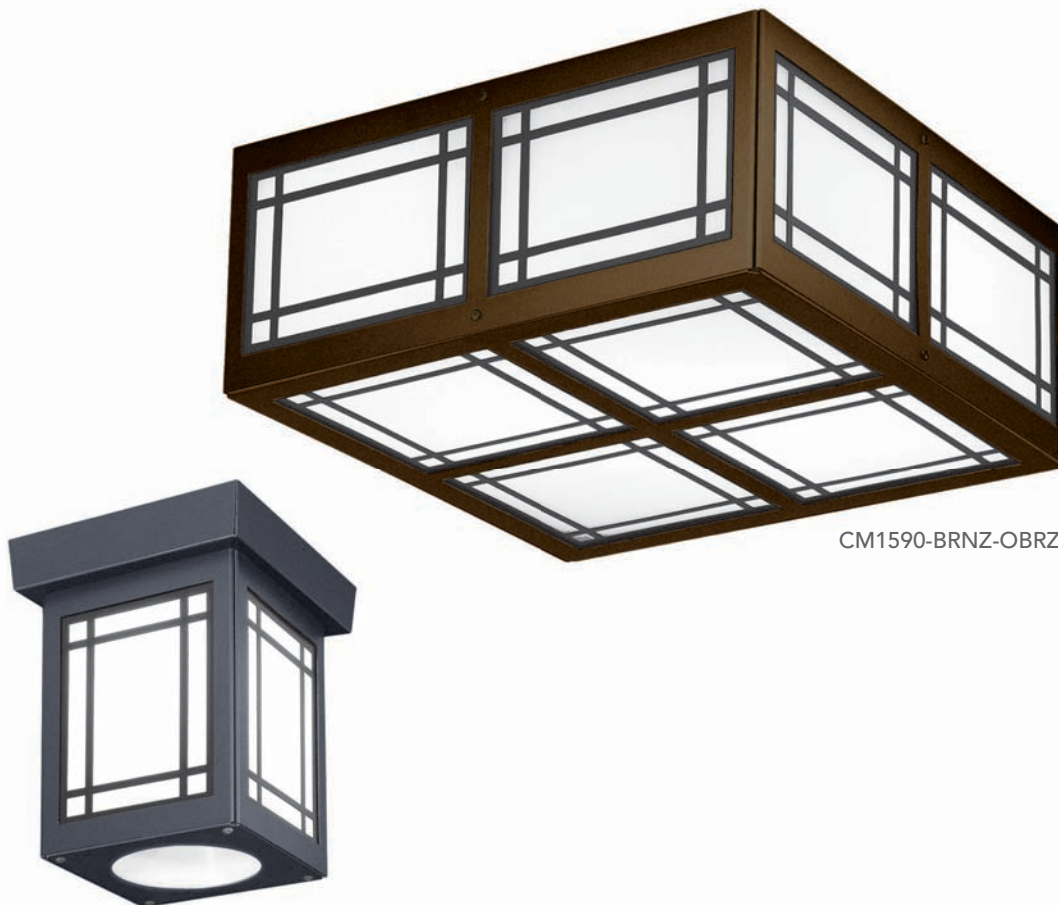


CM1590-BRNZ-OBZ

CM1566-GLIM-OBZ

FEATURES

- 5 year product warranty
- Compact scale
- Fabricated metal housing with internal reinforcing corner extrusions
- Diffuser accent panel creates a three dimensional effect
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Fluorescent or incandescent lamping
- Fluorescent lamping includes downlight enhancing reflector (CM1566 only)
- High power factor electronic ballast (fluorescent lamping). Fixture labeled for specified lamp wattage to satisfy energy code requirements
- Easy relamping
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed.

COMPANIONS

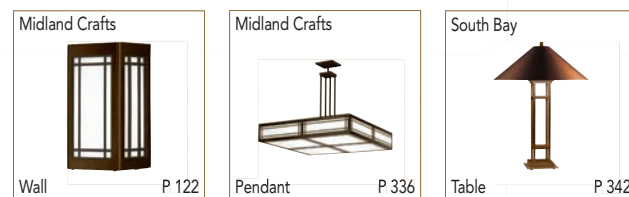Midland Crafts
Wall P 122Midland Crafts
Pendant P 336South Bay
Table P 342

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Increase overall height and/or width
- Add accents to diffuser or trim
- Custom window cutout in housing panels
- Custom diffuser accent panel
- Eliminate diffuser accent panel
- Sloped ceiling adapter
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Fused circuit protection



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty