
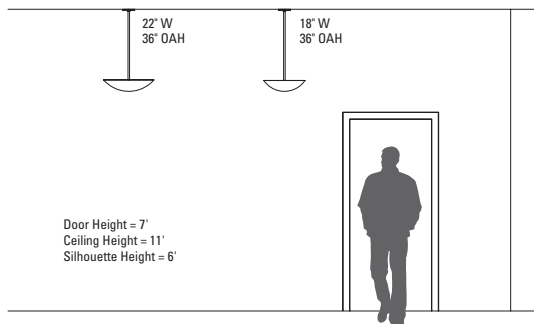



SAMPLE CATALOG NUMBER

CP4506 - 3LF13(MVOLT) - BCA - XPS - OAH(36)
 Model Number Lamping Option (Voltage) Finish Option Option

Model		Lamping Options		Finish		Options	
Model Number	Dimensions						
CP4504	W 18" (457 mm)	3LF13	2CH70T6	PTD	• CB	DCC	• TL
	OAH 36" (914 mm)	3N100	2CH150T6	BA	PB	OAH	XPS
	X 4-5/8" (118 mm)	2CH20T4	2T250	BCA	• SN	QRS	
	NBS 18x4-5/8" (457x118 mm)	2CH39T4		• BCB	SNA		
CP4506	W 22" (559 mm)	2F39	2CH70T6	PTD	• CB	DCC	QRS
	OAH 36" (914 mm)	3LF13	2CH150T6	BA	PB	IEM	• TL
	X 5" (127 mm)	4N150	2T250	BCA	• SN	OAH	XPS
	NBS 22x5" (559x127 mm)	2CH20T4	3T250	• BCB	SNA		
		2CH39T4	4T250				

LINE DRAWINGS



Door Height = 7'
 Ceiling Height = 11'
 Silhouette Height = 6'

ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W Width
- OAH Overall Height
- X Body Height
- NBS Nominal Bowl Size

Lamping Options (Voltage)

- F39 39w long twin tube, 2G11 base, FLR (MVOLT; 347V)
- LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
- N100 100w A-19, medium base, INC (120V)
- N150 150w A-21, medium base, INC (120V)
- CH20T4 20w T-4, G8.5 base, ceramic MH (MTAP)
- CH39T4 39w T-4, G8.5 base, ceramic MH (MTAP)
- CH70T6 70w T-6, G12 base, ceramic MH (MTAP)
- CH150T6 150w T-6, G12 base, ceramic MH (MTAP)
- T250 250w T-4, mini-can base, halogen (120V)

Specify Voltage, MVOLT or MTAP
 MVOLT is a ballast that operates 120V through 277V
 MTAP is a ballast that operates 120V or 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BCA Brushed Chrome Alternative
- BCB Brushed Chrome
- CB Polished Chrome
- PB Polished Brass
- SN Satin Nickel
- SNA Satin Nickel Alternative

Options

- DCC Damp clear coat required for all metal finishes in damp locations
- IEM Integral emergency battery pack for 2F39 lamping, specify voltage (not available with TL option)
- OAH Overall height variation from standard. Include desired height in inches. (ex. OAH(36) will produce an overall fixture height of 36")
- QRS Quartz restrrike, 100w T4 dc bayonet base (in one bowl only), 120V if ordered with CH lamping
- TL Top lens, tempered prismatic glass (not available with CH150 or T250 lamping)
- XPS Express 10 day shipping

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CP4504-3N100	13	34079	429
CP4504-2CH39T4	45	VL071019B	432
CP4504-2CH150T6	43	VL070925A	432
CP4506-2F39	54	34954	430
CP4506-4N150	15		
CP4506-2CH39T4	45	VL071019B	432


See report on indicated page for complete detail

Candela Distribution

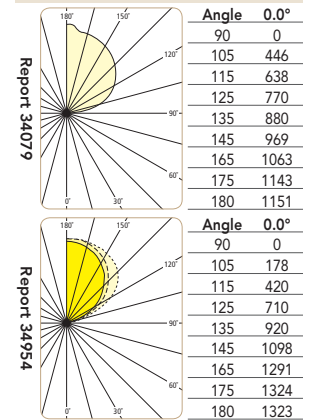

XPOPTICS™

T4 and T6 lampings include high performance XPOptics modules of specular extruded aluminum with integral borosilicate glass lens. +/- 10° tilt provided for upright aiming. Use clear lamp for maximum optical performance.





CP4506-BCA

FEATURES

- 5 year product warranty
- Heavy gauge spun metal bowl
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent, HID or incandescent lamping
- XP Optics™. Extruded aluminum high performance reflector system for maximum efficiency. Reflectors are computer optimized for maximum forward throw and produce smooth, uniform surface illumination
- Integral high power factor electronic ballast for fluorescent and CH HID lamping (CP4506)
- Remote mounted high power factor HID ballast for CH HID lamping (CP4504)
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal

COMPANIONS



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Increase or decrease bowl size
- Add fluorescent dimming ballast (with modified lamping)
- Add remote emergency battery pack
- Wire for multi-level switching
- Include fused circuit protection
- Can be configured to accommodate lowering system mounting (by others)
- Mix and match accents and trim from other product designs
- 347V for ceramic metal halide
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty