


SAMPLE CATALOG NUMBER

CP4320 - 2F39(MVOLT) - SNA - CB - TL - OAH(24)
 Model Number Lamping Option (Voltage) Bowl and Canopy Finish Accent Ring Finish Option Option

Model		Lamping Options		Finish		Options	
Model Number	Dimensions			Bowl and Canopy	Accent Ring		
CP4320	W	22"	(559 mm)	2F39	PTD • CB	PTD	DCC
	OAH	36"	(914 mm)	3LF13	BA PB	• CB	IEM
	X	5"	(127 mm)	4N150	BCA • SN	PB	OAH
	NBS	22x5"	(559x127 mm)	3T250	• BCB SNA		• TL XPS

LINE DRAWINGS



Power Art Cable™ Patent Pending

ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W** Width
- OAH** Overall Height
- X** Body Height
- NBS** Nominal Bowl Size

Lamping Options (Voltage)

- F39** 39w long twin tube, 2G11 base, FLR (MVOLT; 347V)
 - LF13** 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
 - N150** 150w A-21, medium base, INC (120V)
 - T250** 250w T-4, mini-can base, halogen (120V)
- Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD** Painted - specify color code (ex. BRNZ for Bronze)
- BA** Brushed Aluminum
- BCA** Brushed Chrome Alternative
- **BCB** Brushed Chrome
- **CB** Polished Chrome
- PB** Polished Brass
- **SN** Satin Nickel
- SNA** Satin Nickel Alternative

Options

- DCC** Damp clear coat required for all metal finishes in damp locations
- IEM** Integral emergency battery pack for 2F39 lamping, specify voltage (not available with TL option)
- OAH** Overall height variation from standard. Include desired height in inches. (ex. OAH(24) will produce an overall fixture height of 24")
- **TL** Top lens, tempered prismatic glass (not available with T lamping)
- XPS** Express 10 day shipping

PHOTOMETRICS and BIM



Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CP4320-2F39	54	34954	430
CP4320-4N150		15	


See report on indicated page for complete detail

Candela Distribution

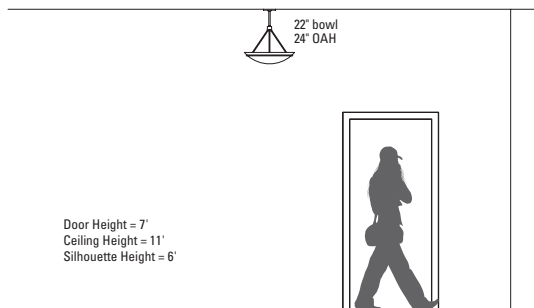

XP OPTICS™

T4 lamping includes high performance XP Optics module of specular extruded aluminum with integral borosilicate glass lens. +/- 10° tilt provided for uplight aiming. Use clear lamp for maximum optical performance.





CP4320-SNA-CB

FEATURES

- 5 year product warranty
- Heavy gauge spun metal bowl
- UL recognized Power Art Cable™ mounting system (patent pending) uses a braided stainless steel jacket to encapsulate power conductors and provide support with configurations rated for loads up to 150 lbs
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Accent colors available between bowl and accent ring
- Easy tool-less relamping
- Fluorescent or incandescent lampping
- High power factor electronic ballast (fluorescent lampping)
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal
- XP Optics™. Extruded aluminum high performance reflector system for maximum efficiency. Reflectors are computer optimized for maximum forward throw and produce smooth, uniform surface illumination

COMPANIONS



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Increase or decrease bowl size
- Add fluorescent dimming ballast
- Add remote emergency battery pack
- Include fused circuit protection
- Can be configured to accommodate lowering system mounting (by others)
- Alternate stem accents
- Ceramic metal halide lampping



Approved for indoor damp locations.
Metal finishes require DCC (damp clear
coat) for 5 year warranty