


SAMPLE CATALOG NUMBER

CP4042 - 8QF26(MVOLT) - AG7038 - XPS - OAH(30)
 Model Lamping Option (Voltage) Finish Option Option

Model		Lamping Options		Finish		Options	
Model Number	Dimensions						
CP4040	W 23-5/8" (599 mm)	8LF13		PTD		AF	OAH
	OAH 27" (686mm)	8TF26		• CB		• ABA	REM
	X 9" (229 mm)	4N100		PB		DCC	• TL
	NBS 24x9" (610x229 mm)					FUSE	XPS
CP4042	W 29-5/8" (754 mm)	8QF26		PTD		AF	FUSE
	OAH 30" (762 mm)	※ 8TF42		• CB		• ABA	OAH
	X 9" (229 mm)	6N100		PB		DCC	REM
	NBS 30x9" (762x229 mm)					• DIM-A	• TL
						• DIM-L	XPS
CP4044	W 36-1/8" (917 mm)	8QF26		PTD		AF	FUSE
	OAH 36" (914 mm)	※ 8TF42		• CB		• ABA	OAH
	X 11" (279 mm)	8TF70		PB		DCC	REM
	NBS 36x11" (914x279 mm)	6N150				• DIM-A	• TL
						• DIM-L	XPS
CP4046	W 44-7/8" (1139 mm)	※ 8TF42		PTD		AF	FUSE
	OAH 42" (1067 mm)	8TF70		• CB		• ABA	OAH
	X 14" (256 mm)	8N150		PB		DCC	REM
	NBS 45x14" (1143x356 mm)					• DIM-A	XPS
						• DIM-L	

LINE DRAWINGS

CP4040 / CP4042 / CP4044 / CP4046



ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- ※ Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattage allowed

Dimensions

W	Width
OAH	Overall Height
X	Body Height
NBS	Nominal Bowl Size

Lamping Options (Voltage)

LF13	13w twin tube 4-pin, 2GX7 base, FLR	(MVOLT)
QF26	26w quad, 4-pin G24q-3 base, FLR	(MVOLT; 347V)
※ TF26	26w triple, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
※ TF32	32w triple, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
※ TF42	42w triple, 4-pin GX24q-4 base, FLR	(MVOLT; 347V)
TF70	70w triple, 4-pin GX24q-6 base, FLR	(MVOLT)
N100	100w A-19, medium base, INC	(120V)
N150	150w A-21, medium base, INC	(120V)

Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

PTD	Painted - specify color code (ex. BRNZ for Bronze)
• CB	Polished Chrome
PB	Polished Brass

Options

- ABA Hand Painted Alabaster Alternative
- AF Add finial
- DCC Damp clear coat required for all metal finishes in damp locations
- DIM-A Fluorescent dimming, Advance Mark 10, specify voltage
- DIM-L Fluorescent dimming, Lutron Compact SE, specify voltage (not available with TF70)
- FUSE Fusing, specify 120V or 277V
- OAH Overall height variation from standard. Include desired height in inches. (ex. OAH(30) will produce an overall fixture height of 30")
- REM Remote emergency battery pack for fluorescent lamping (see page 435 for detailed information)
- TL Top lens, tempered prismatic glass
- XPS Express 10 day shipping

PHOTOMETRICS and BIM



Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CP4040-8LF13	46	01228	404
CP4040-4N100	16	36388	431
CP4042-8QF26	45	01111	404
CP4042-8TF42	57	07987	414
CP4042-6N100	15	01227	404
CP4044-8TF70	72	07988	414
CP4044-6N150	16	36387	431
CP4046-8TF70	72	07988	414
CP4046-8N150	16		

See report on indicated page for complete detail

Candela Distribution

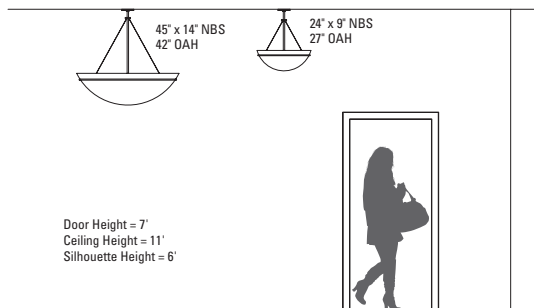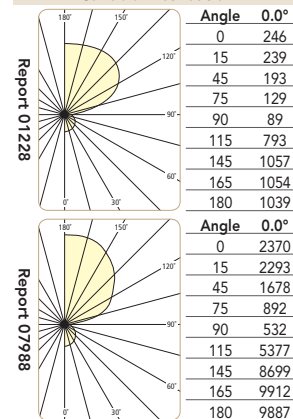



CP4042-AG7038



Add Finial (AF) Option

COMPANIONS



FEATURES

- 5 year product warranty
- Rolled metal accent ring
- 1/16" stainless steel aircraft cables
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Thermally formed 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- Use coated lamps for incandescent applications
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal

SUGGESTED VARIATIONS

- Mix and match accents and trim from other product designs
- Specialty finishes to match architectural detail
- Larger scale acrylic diffuser
- Alternate lamping up to rated wattage listed
- Accommodate pulse-start metal halide lamping
- Wire for multi-level switching
- Sloped ceiling adapter for ceiling slopes greater than 45 degrees
- Can be configured to accommodate lowering system mounting (by others)
- Construct to accept XEM option
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty