


SAMPLE CATALOG NUMBER

OW1522 - 1TF42(MVOLT) - TW9016 - REM
 Model Number Lamping Option (Voltage) Finish Option


Model				Lamping Options	Finish	Options
Model Number	Dimensions					
WRAP OW1454	W	15-7/8"	(378 mm)	⚡ 1TF42 1PH100	PTD GFA SF SS • VG	BC REM TC XPS
	H	7"	(178 mm)			
	D	7-7/8"	(200 mm)			
	MC	3-1/2"	(89 mm)			
SOLARIA OW1522	W	20-7/8"	(530 mm)	⚡ 1TF42 1PH100	PTD VG	REM
	H	10-1/4"	(260 mm)			
	D	12"	(305 mm)			
	MC	4-1/4"	(108 mm)			

LINE DRAWINGS

WRAP
OW1454



SOLARIA
OW1522



ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- ⚡ Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattaged allowed

Dimensions

- W Width
- H Height
- D Depth (measured from wall to front of fixture)
- MC Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- ⚡ TF26 26w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
 - ⚡ TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
 - ⚡ TF42 42w triple, 4-pin GX24q-4 base, FLR (MVOLT; 347V)
 - PH100 100w ED-17, medium base, pulse start MH (MTAP; 347V)
- Specify Voltage, MVOLT or MTAP
 MVOLT is a ballast that operates 120V through 277V
 MTAP is a ballast that operates 120V to 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- GFA Grinder Finish Aluminum
- SF Brushed Textured Stainless Steel
- SS Stainless Steel
- VG Verdigris Patina over Copper

Options

- BC Bottom cover, matches finish (creates 90% uplight)
- REM Remote emergency battery pack for fluorescent lamping (UL damp location, 50° F minimum)
- TC Top cover, matches finish (creates 100% downlight for full cut off)
- XPS Express 10 day shipping

PHOTOMETRICS and BIM



Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
OW1454-1PH100	68	06289	412
OW1522-1PH100	60	06285	412

See report on indicated page for complete detail

Candela Distribution

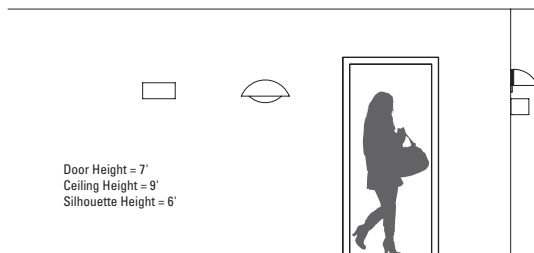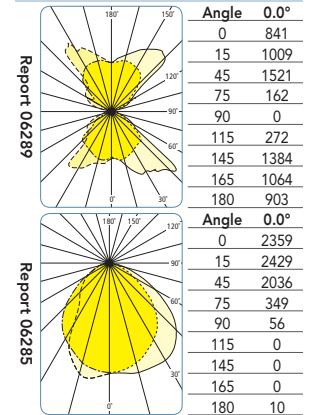

WRAP™ & SOLARIA™

OUTDOOR

DECORATIVE AND PERFORMANCE - WALL

WALL




SOLARIA
OW1522-TW9016



WRAP
OW1454-TW9016

COMPANIONS

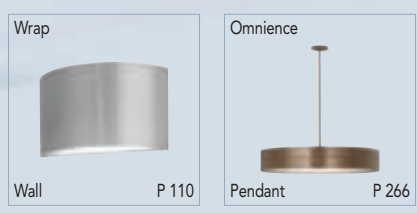

Wrap
Wall P 110

Omnience
Pendant P 266

WRAP

FEATURES

- 5 year product warranty
- Rolled aluminum housing
- Cast aluminum, fully gasketed and sealed lamp chamber and backplate
- Oven cured no VOC acrylic powder coat for painted finishes
- Clear tempered prismatic glass top and bottom lenses standard
- 50% up/downlight standard, BC option 90% uplight/10% downlight, TC option 100% downlight
- Fluorescent or HID lamping
- High power factor electronic ballast, 0° F/-18° C starting temperature (fluorescent lamping)
- Remote mounted high power factor HID ballast with long distance ignitor standard, 50' maximum ballast to lamp distance, PH100(347V) is 15' maximum
- Surface mounts to standard electrical junction box (by others) with provided hardware
- UL wet location listed for mounting 4' above grade



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Custom window cutout or logo
- Alternate lamping up to rated wattage listed
- Increase housing height and/or width

SOLARIA

FEATURES

- 5 year product warranty
- Heavy gauge spun metal housing and back disk
- Rolled perforated band creates subtle indirect halo effect
- Cast aluminum, fully gasketed and sealed lamping chamber and backplate
- Oven cured no VOC acrylic powder coat for painted finishes
- Clear tempered prismatic glass bottom lens standard
- High power factor electronic ballast, 0° F/-18° C starting temperature (fluorescent lamping)
- Remote high power factor ballast standard for HID lamping
- Remote mounted high factor power HID ballast with long distance ignitor standard, 50' maximum ballast to lamp distance
- Mounts to standard electrical junction box (by others) with provided hardware
- UL wet location listed for mounting 4' above grade



SUGGESTED VARIATIONS

- Specialty paint finishes to match architectural detail
- Alternate lamping up to rated wattage listed

Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty