


LEUCOS®

INSTRUCTIONS FOR INSTALLATION - LEUCOS USA

AYERS



A1 Enclosed



Two installers



Save instructions

Revised

08 - Giugno - 2007

**GENERAL NOTES: - FIXTURE TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- FOLLOW ALL LOCAL AND NATIONAL ELECTRIC CODES.**

1. (See Fig.1) Unscrew canopy cover "C" from canopy "A".
2. Run supply wires through center hole in canopy "A" and attach canopy to the J-box.
3. (See Fig.4) .Loosen the steel cable, if necessary, then guide base "P" into the top hole of the diffuser and match it with the lower structure "M" upwised inside the diffuser as shown. Take care to guide the three threaded pins "N" through the corresponding holes of base "P", then secure the two parts by tightening the three thumb screws (Do not use tools).
4. (See Fig.3) Adjust the diffuser at the desired length by stretching the steel cable from canopy "A" then lock it on barrel clamp "F", by a loop inside the two holes as shown, then tight the two side screws.
5. (See Fig.3) Level the glass by sliding the cable through holes in the fixture canopy "A" and holes in the fixture body "P". When the glass is leveled tighten set screw "G" on fixture body and hex screw "E" on canopy with the allen wrench provided.
6. Install lamp in socket.
7. (See Fig.5) Run wire through canopy cover "C" and through hole "H" in canopy "A" and trough wire clamp "I" then connect it to the supply wires.
NOTE: Make sure the wire length is not shorter than the suspension cables such that the fixture is hanging from the electrical wire rather than the suspension cables! Leave some excess wire for decorative "swag" as shown.
9. Cut off excess wire leaving enough wire to make wire connections. Then make wire connections.
10. Run canopy cover "C" up wire and screw into canopy. Make sure plastic wire protection bushing is firmly seated in center hole of canopy.
11. Slide canopy ring "B" up cables and snap over the three spring loaded pins in the fixture canopy "A".

Fig.1




Fig.2




Fig.3

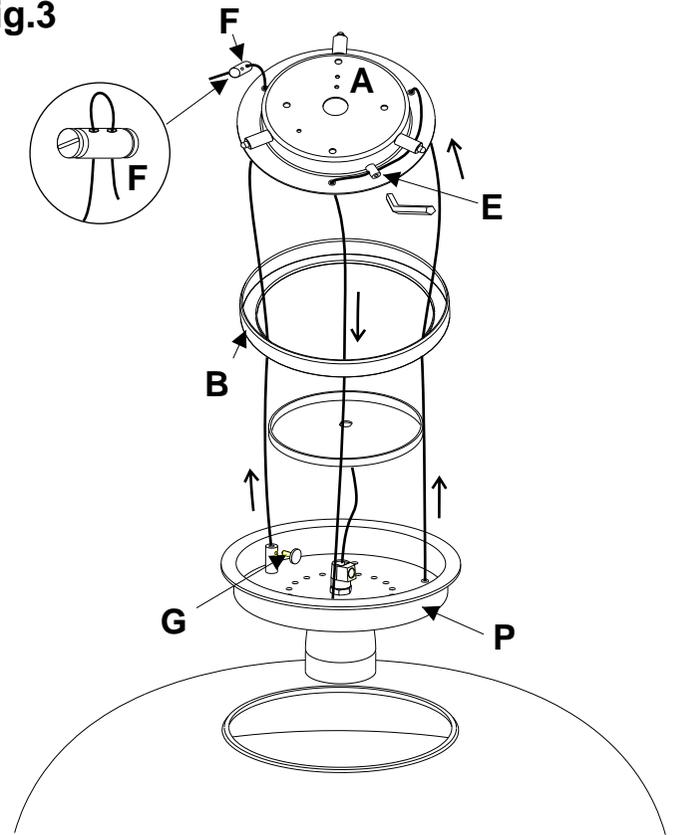


Fig. 4



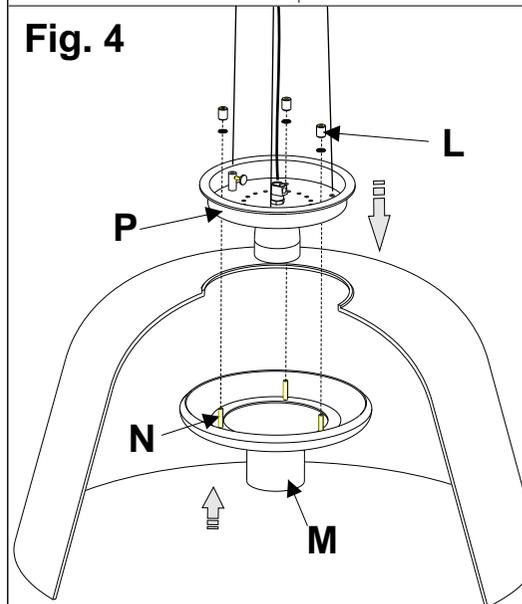


Fig. 5

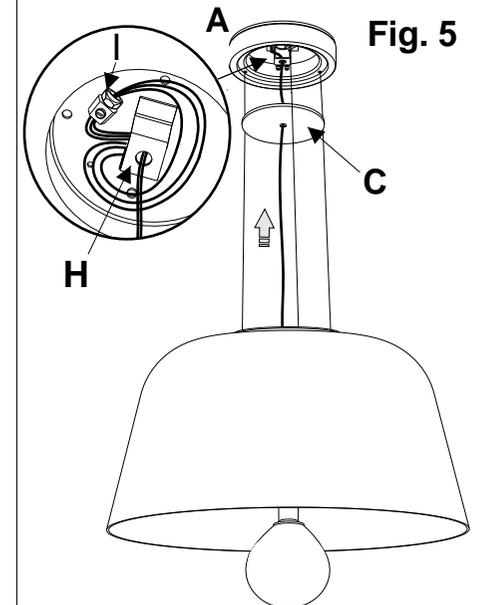

AYERS
100W Globe
Medium Base E26 TYPE G40

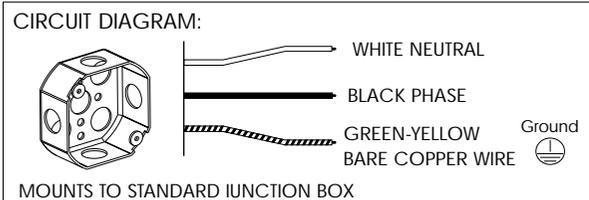

For additional information please contact your local dealer or
LEUCOS USA at: tel. (732) 225-0010 fax (732) 225-0250