


## ISIDE RECESSED

Roberto Pamio

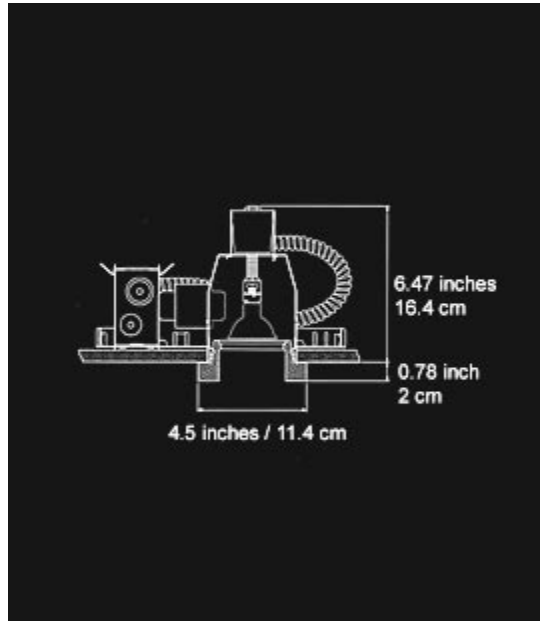

De

DIMENSIONS SHOWN FOR NEW CONSTRUCTION

### DESCRIPTION

A small-scale, semi-recessed fixture providing downward light through an acid-etched, poured glass diffuser available in a wide range of colors. Provides a narrow to wider beam spread, depending on the lamp, as well as a soft pleasant ceiling glow.

### HOUSING & LAMP OPTIONS

#### Remodel & New Construction:

1x50 watt, low-voltage halogen, MR-16

#### Insulated Ceiling:

1x35 watt, low-voltage halogen, MR-16

Provided with 120/12V or 277/12V with magnetic transformer.

#### Housing options :

Remodel Housing, New Construction , Insulated Ceiling, Chicago Plenum, Air Tight, Vapor Tight.

#### Other lamp options:

Remodel Housing : 13W CFL.

New Construction and Insulated Ceiling : 13W & 18W CFL.

Compatible with quad lamp, 4 Pin, electronic ballast 120/277 Volt only.

Further options:

1x50 watt, halogen PAR 20 or 1x35 watt, PAR 20 metal halide

Also available with LED, consult factory.

### GLASS COLOR

Satin White, Rose, Aquamarine, Pale Blue, Cobalt Blue, Jade Green, Crystal and Mirrored Chrome Glass

**NOTE**


U.L. listed/CSA approved for damp location. For U.L. compliance, use enclosed MR-16 lamp.

**ISIDE 2**



**ISIDE 2 - MR16 - 50W 38°**

Lux		
h	E max	E med
1.00	2168	1279
2.00	542	320
3.00	241	142
4.00	135	80
5.00	87	51

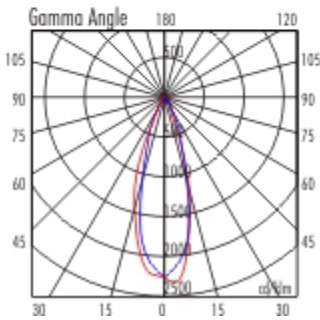

**HOUSING & LAMP OPTIONS :**

**Remodel & New Construction :** 1x50 watt, low-voltage halogen, MR-16  
**Insulated Ceiling :** 1x35 watt, low-voltage halogen, MR-16  
 - Provided with 120/12V or 277/12V with magnetic transformer.

**Housing options :**  
 Remodel Housing, New Construction, Insulated Ceiling, Chicago Plenum, Air Tight, Vapor Tight.

**Other lamp options :**  
 Remodel Housing : 13W CFL  
 New Construction and Insulated Ceiling : 13W & 18W CFL  
 Compatible with quad lamp, 4 Pin, electronic ballast 120/277 Volt only.  
 Further options: 1x50 watt, halogen PAR 20  
 1x35 watt, PAR 20 metal halide

Also available with LED, consult factory.

Opening 3.3/4" - - Damp location

