



LEUCOS®

FOR LEUCOS USA - INSTALLATION INSTRUCTIONS

KON



A1 Enclosed



Revised
03. Sep. 03

WARNING: - Disconnect power before installation.

- Install in accordance with the national and local electrical codes.
- Follow directions carefully to avoid scratching the glass diffuser.

1. **Fig. 1** Run supply wires from standard junction box through center of plate "A" and mount plate "A" to J-box.
2. **Fig.1- 2** Run supply from socket assembly "D" and into glass diffuser "C" and out through wire hole in glass, through rubber O - rings "Z" on cable, up through canopy "B" and through wire clamp "X".
3. **Fig. 3** Loosen set screw "H" (with 1.5mm hex wrench provided) allowing canopy "B" to slide freely on cable.
4. **Fig. 4- 5- 6** Attach socket assembly "D" to cable by clipping hanger spring "F" into holes "L" in top of socket assembly "D".
5. **Fig. 2** Making sure fixture is supported, loosen cable grip thumb nut "S". Grab cable and feed up through cable grip until fixture is at desired suspension length. Then tighten cable grip thumb nut "S".
6. Adjust wire length to desired look and adjust rubber O-rings "Z" along cable.
7. Cut off excess wire and cable making sure to leave enough cable for minor adjustments and enough wire to make electrical connections. Then make wire connections and move connections up into junction box.
8. Tighten wire clamp "X" and slide canopy "B" to ceiling and tighten set screw "H".
9. Install lamp provided.
10. Restore Power.

FOR U.S.A. MARKET ONLY:

max 1x40W - 120V - E14 HI - SPOT 

Do not use halogen lamps.

For additional information or replacement lamp please contact your local dealer or
LEUCOS U.S.A. at:
tel. (732) 225-0010 fax (732) 225-0250

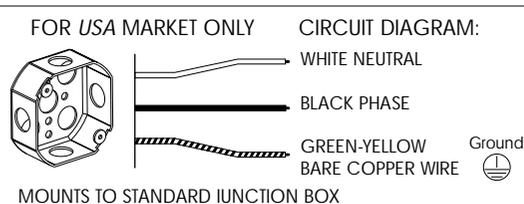


FIG.1

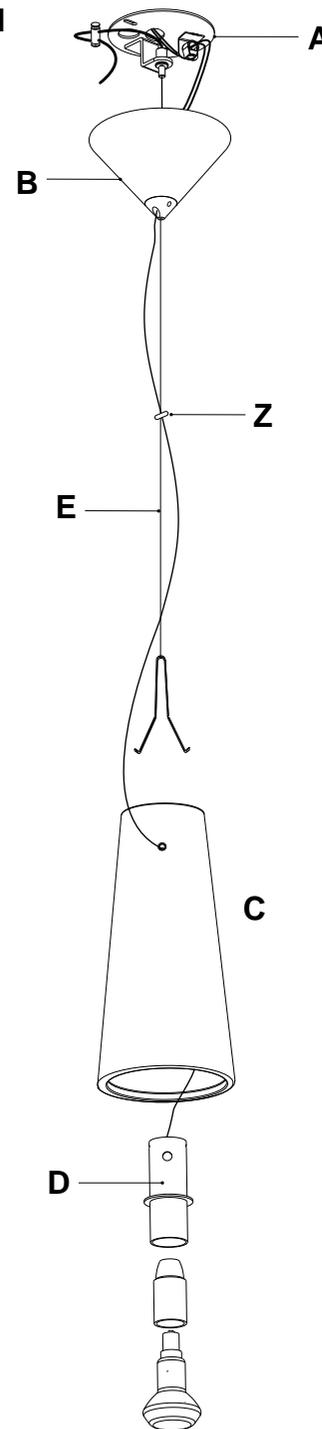


FIG.2




FIG.3




FIG.4

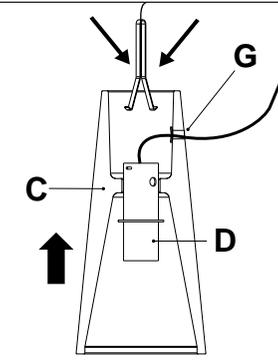


FIG.5

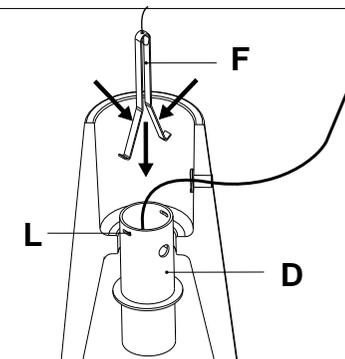


FIG.6

