

# LEUCOS®

## INSTALLATION INSTRUCTIONS

### MODULO S 15 - MODULO S 13 CL

A1 Enclosed



One installer



Save instructions

Revised  
NOV - 16 - 2001

**WARNING: - DISCONNECT POWER BEFORE INSTALLATION.**

- INSTALL IN ACCORDANCE WITH THE NATIONAL AND LOCAL ELECTRICAL CODES.
- FOLLOW DIRECTIONS CAREFULLY TO AVOID SCRATCHING THE GLASS DIFFUSER.

1. **ILL. 1** Attach the metal canopy "A" to the junction -box.  
 2. **ILL. 2** Guide the electrical wires and the steel cable through the glass diffuser "C".  
 3. **ILL. 1-3** Continue to pass the electrical wires through the rubber rings in one of the 2 lateral holes "F" of the metal cone and the steel wire through the central hole of the canopy "B".  
**PLEASE NOTE: IN ORDER TO PASS THE ELECTRICAL WIRES THROUGH THE CANOPY, IT IS NECESSARY TO PUNCH A HOLE WITH A SCREWDRIVER INSIDE THE CANOPY "B".**

4. **ILL. 2** - Slightly loosen the fitting "S". Pass the steel cable through the central hole of the fitting "S". This fitting is pressured fit. In order to secure the steel cable push the fitting toward the top. Having determined the correct height of the fixture, secure the steel cable by screwing the fitting "S".

In order to properly secure the steel cable, we suggest passing the steel cable through the fitting "J". Clamp the cable in position with the fitting "J" screw.

5. Connect the fixture's electrical wires supply wire connectors of the proper size leaving excess wire for decorative "swag" below canopy "B" if desired.

6. Slide the canopy "B" up to rest against the ceiling and secure it in position with set screw "H".

**PLEASE NOTE: USE THE ALLEN WRENCH PROVIDED INSIDE THE CANOPY,**

7. Center fitting "Z" on the steel cable and fit the two electric wires into the appropriate slots.

8. **ILL. 4-5** Position and center the glass diffuser "C" by rotating, if necessary the set screw of the socket "G" into proper position and if necessary by rotating the glass "C".


9. Install the light bulb.

10. Restore power.

**FOR U.S.A. MARKET ONLY:**


**MODULO S15**  
**MODULO S13/CL**

max 1x60W - 120V - E26 - TYPE A-15 mdium base  
max 1x60W - 120V - E26 - TYPE A-19

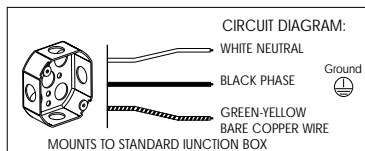


For additional informational please contact  
your local dealer or **LEUCOS U.S.A.**  
At: Tel. (732)225-0010 - Fax (732) 225-0250


**ILL.1**

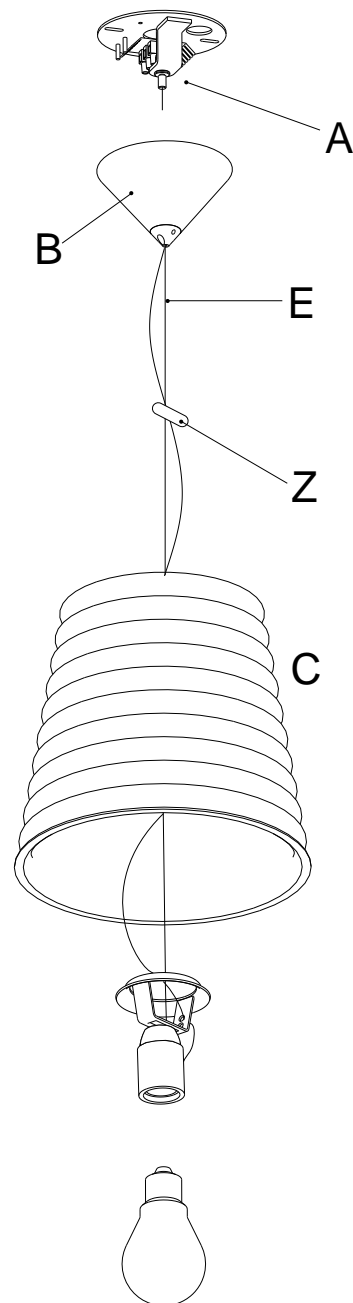


**ILL.2**



**ILL.3**



**ILL.4**



**ILL.5**