


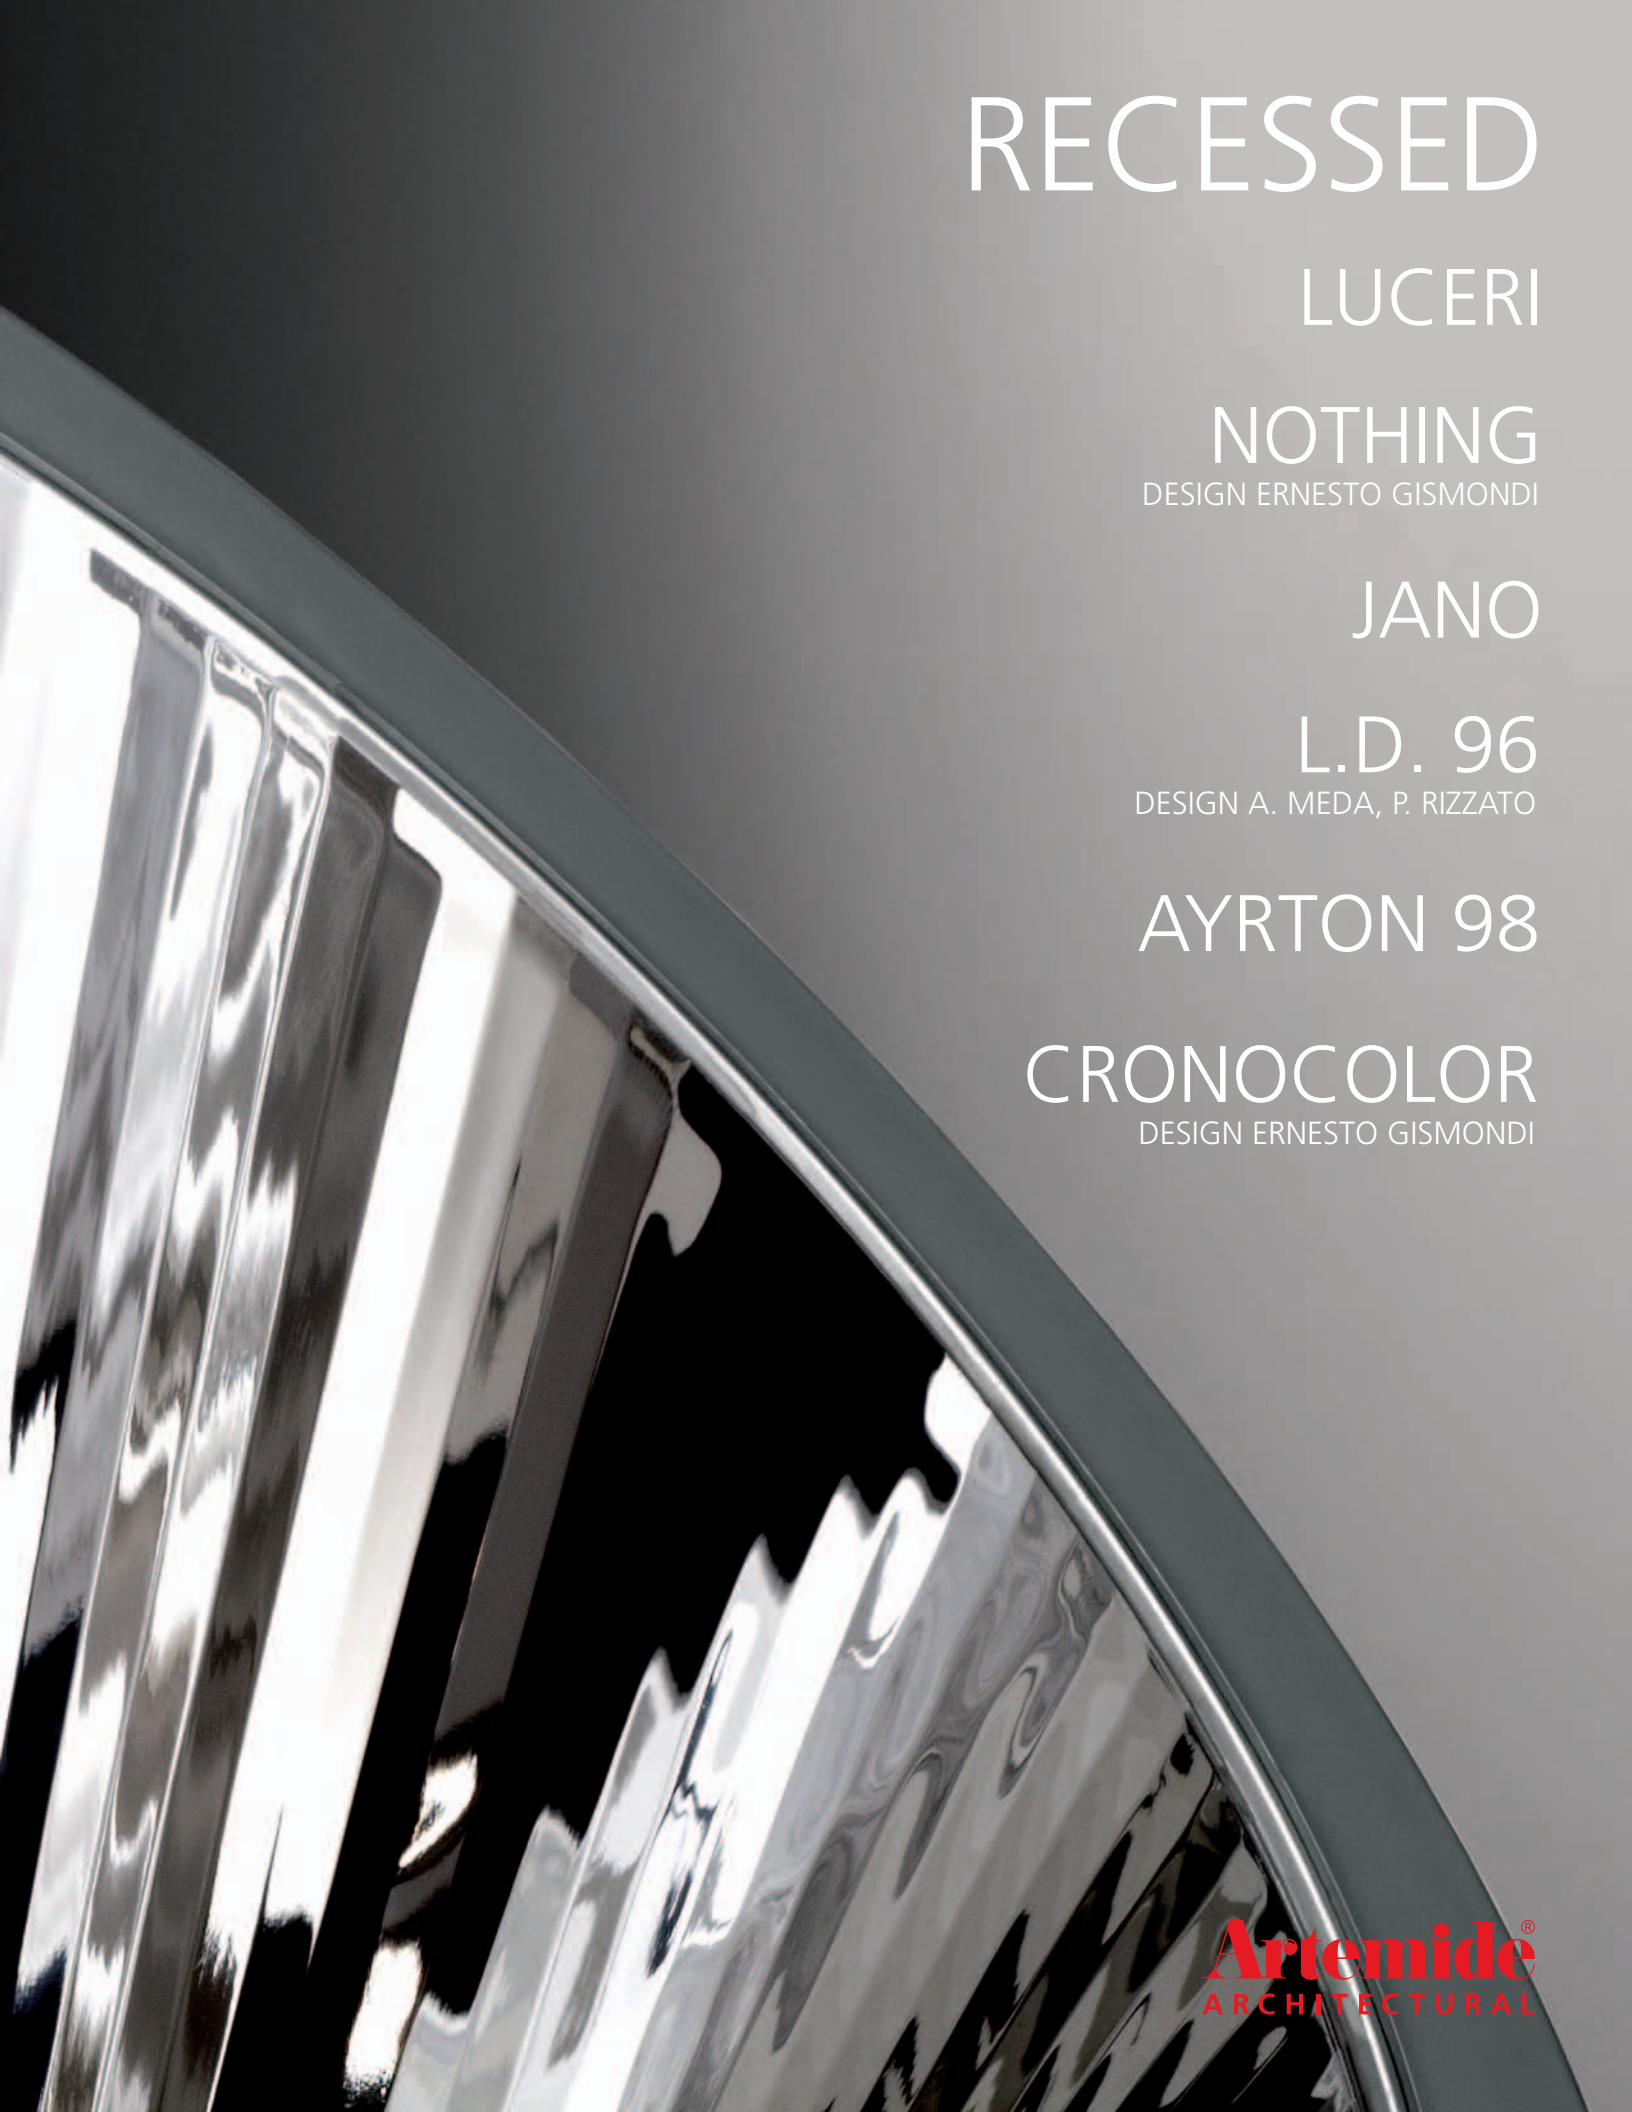

RECESSED

LUCERI

NOTHING

DESIGN ERNESTO GISMONDI

JANO

L.D. 96

DESIGN A. MEDA, P. RIZZATO


AYRTON 98

CRONOCOLOR

DESIGN ERNESTO GISMONDI

Artemide[®]
ARCHITECTURAL

LUCERI

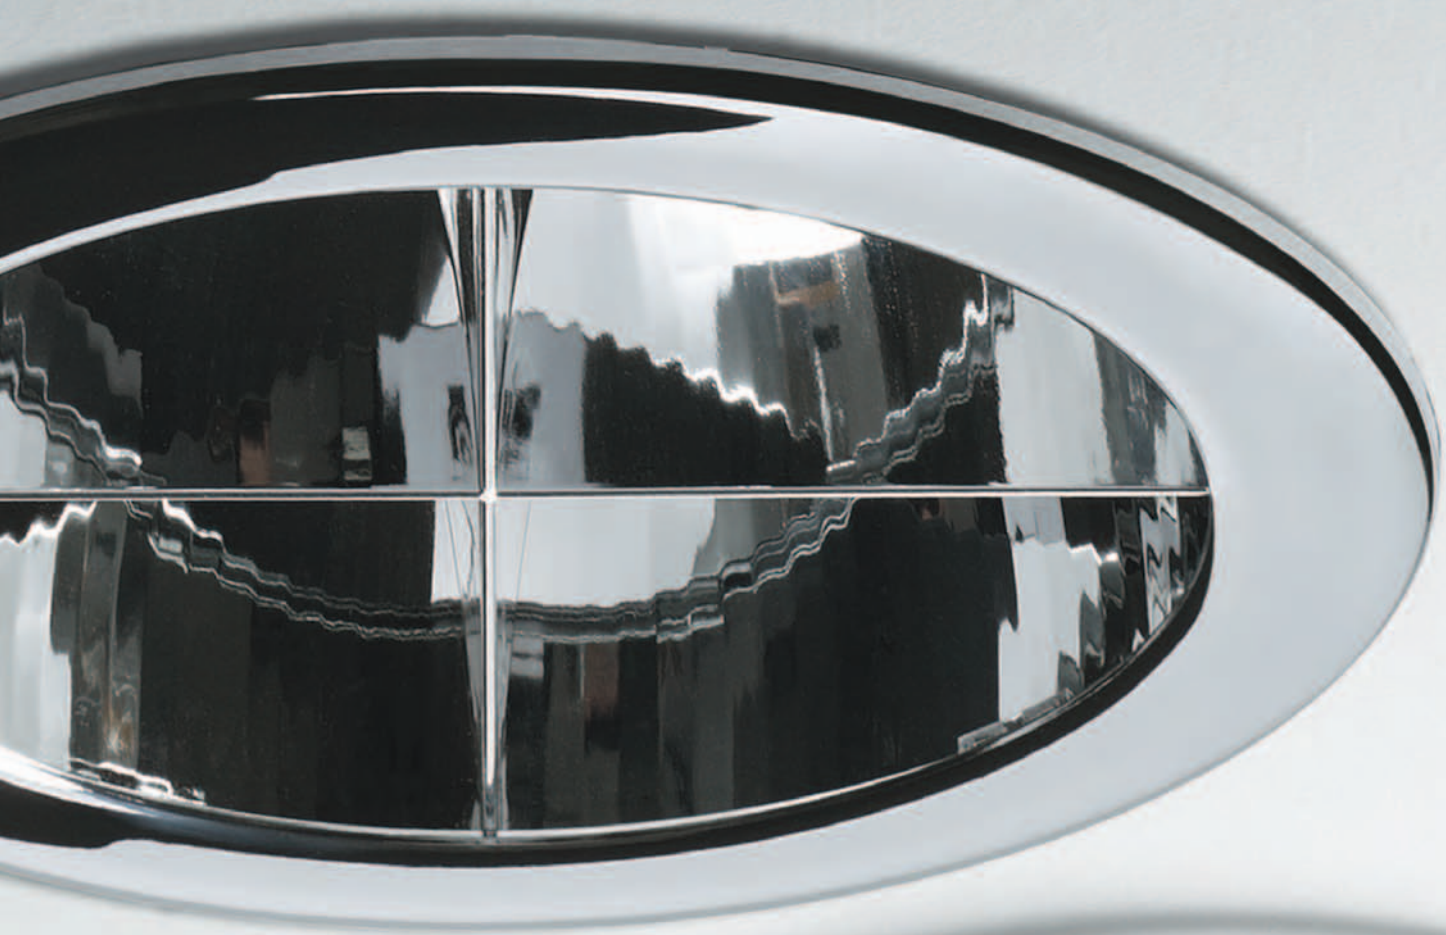

LUCERI 220 WITH ANTI-DAZZLE CROSS-BLADE LOUVER



LUCERI 150 WITH CONCENTRIC PATTERN THERMOPLASTIC LENS




LUCERI 290 WITH FROSTED GLASS LENS



- recessed ceiling downlight luminaires for direct compact fluorescent lighting, with a metalized reflector surface made of high quality technopolymers that are specifically designed to maximize the lamps performance
- recessed housing in galvanized steel construction with interior reflector of metalized technopolymer plastic
- trim options available in three diameters: 7", 9", and 12 1/2"
- recessed housing designed for "new construction" installations, ceiling cut-out dimensions: Luceri 150 (7") - 5 7/8", Luceri 220 (9") - 8 3/8", Luceri 290 (12 1/2") - 11 3/8"
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballast
- for 277V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative
- Luceri 150 recessed ceiling trim options:
 - die-cast aluminum trim (white, nickel, or chrome)
 - die-cast aluminum trim (white) with concentric pattern thermoplastic lens
 - frosted glass lens with chrome fasteners with die-cast aluminum trim (white or chrome)
- Luceri 220 recessed ceiling trim options:
 - die-cast aluminum trim (white, nickel, or chrome)
 - anti-dazzle cross blade louver (to be used with die-cast trim)
 - plastic trim (white, nickel, or chrome) with transparent glass lens
 - plastic trim (white or nickel) with silk screened glass lens
 - die-cast aluminum trim (white) with concentric pattern thermoplastic lens
 - frosted glass lens with chrome fasteners with die-cast aluminum trim (white or chrome)
- Luceri 290 recessed ceiling trim options:
 - die-cast aluminum trim (white, nickel, or chrome)
 - frosted glass lens with chrome fasteners with die-cast aluminum trim (white or chrome)

LUCERI

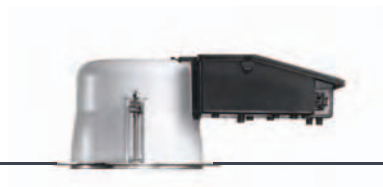

LUCERI 150

AVAILABLE BULBS

T4/G24q-1 

DIE-CAST TRIM



ANTI-DAZZLE
CROSS-BLADE LOUVER



PLASTIC TRIM
WITH TRANSPARENT GLASS
IP44



PLASTIC TRIM
WITH SILK SCREEN PRINTED GLASS
IP44



DIE-CAST TRIM
WITH CONCENTRIC PATTERN THERMOPLASTIC LENS
IP44



DIE-CAST TRIM
WITH FROSTED GLASS LENS
IP44



LUCERI 220 FLAT

T4/G24q-1 

T4/G24q-2 

T4/G24q-3 





LUCERI 220 SCREEN

T4/G24q-1 
 T4/G24q-2 
 T4/G24q-3 



LUCERI 290

T4/GX24q-3 
 T4/GX24q-4 



LUCERI

CONDE NAST, MILAN (I), PROGETTO CMR



AUDI, GLASGOW (GB), SDA ARCHITECTS



HQ'S PIQUADRO SPA, SILLA DI GAGGIO MONTANO (I), KARIM AZZABI



PALAZZO ITALIA, BERLIN (D)





DAIMLER BENZ, STUTTGART (D)



CIRSA, SALA BINGO AZZURRO, MILAN (I), GOBBI

LUCERI 150 HOUSING/REFLECTOR



	cut out  ø 5 7/8" ø 150mm <table><thead><tr><th>H m</th><th>Ø m</th><th>EMax lux</th><th>EM lux</th></tr></thead><tbody><tr><td>1</td><td>3,55</td><td>188</td><td>40</td></tr><tr><td>2</td><td>7,12</td><td>47</td><td>10</td></tr><tr><td>3</td><td>10,67</td><td>21</td><td>4</td></tr><tr><td>4</td><td>14,24</td><td>12</td><td>2</td></tr><tr><td>5</td><td>17,79</td><td>8</td><td>2</td></tr></tbody></table> spread of beam 2 x 60°	H m	Ø m	EMax lux	EM lux	1	3,55	188	40	2	7,12	47	10	3	10,67	21	4	4	14,24	12	2	5	17,79	8	2	
H m	Ø m	EMax lux	EM lux																							
1	3,55	188	40																							
2	7,12	47	10																							
3	10,67	21	4																							
4	14,24	12	2																							
5	17,79	8	2																							
T4/G24q-1 - 13W 	<table><thead><tr><th>CODE</th><th>DESCRIPTION</th><th>WEIGHT</th></tr></thead><tbody><tr><td>L590308</td><td>Luceri 150 housing/reflector 1 x 13W FLU/EB</td><td>4.5 lbs. / 2.04kg</td></tr></tbody></table>	CODE	DESCRIPTION	WEIGHT	L590308	Luceri 150 housing/reflector 1 x 13W FLU/EB	4.5 lbs. / 2.04kg																			
CODE	DESCRIPTION	WEIGHT																								
L590308	Luceri 150 housing/reflector 1 x 13W FLU/EB	4.5 lbs. / 2.04kg																								

LUCERI 150 TRIM OPTIONS

	Die-cast trim with open aperture L591528 White L591578 Nickel matte L591598 Chrome
	L591228 Die-cast trim with concentric pattern thermoplastic lens
	Die-cast trim with frosted glass lens L591328 White L591398 Chrome



LUCERI 220 HOUSING/REFLECTOR SINGLE LAMP



4" 100mm 13" 330mm 9" 230mm	cut out ø 8 11/16" ø 220mm				H m	Ø m	EMax lux	EM lux	-90° 90°
					1	2,74	398	130	
					2	5,47	99	33	
					3	8,21	44	14	
					4	10,94	25	8	
					5	13,68	16	5	
					spread of beam 2 x 50°				
CODE		DESCRIPTION		WEIGHT					
T4/G24q-2 - 18W		L598008	Luceri 220 housing/reflector 1 x 18W FLU/EB	5.7 lbs. / 2.59kg					
T4/G24q-3 - 26W		L597408	Luceri 220 housing/reflector 1 x 26W FLU/EB	5.7 lbs. / 2.59kg					



LUCERI 220 HOUSING/REFLECTOR DOUBLE LAMP



					H m	Ø m	EMax lux	EM lux		
					1	2,52	938	301		
					2	5,05	234	75		
					3	7,58	104	33		
					4	10,10	59	19		
					5	12,62	38	125		
					spread of beam 2 x 50°					
									T4/G24q-2	Cd/Klm
T4/G24q-1 - 13W			CODE		DESCRIPTION		WEIGHT			
T4/G24q-2 - 18W			L592308	Luceri 220 housing/reflector	2 x 13W FLU/EB	5.7 lbs. / 2.59kg				
T4/G24q-3 - 26W			L596608	Luceri 220 housing/reflector	2 x 18W FLU/EB	5.7 lbs. / 2.59kg				
			L596708	Luceri 220 housing/reflector	2 x 26W FLU/EB	5.7 lbs. / 2.59kg				

LUCERI 220 SCREEN HOUSING/REFLECTOR DOUBLE LAMP




									
	H m	Ø m	EMax lux	EM lux	1	2,04	634	280	
	2	4,08	158	70					
	3	6,12	70	31					
	4	8,16	40	18					
	5	10,2	25	11					
spread of beam 2 x 45°				T4/G24q-3 Cd/Klm					
CODE		DESCRIPTION				WEIGHT			
T4/G24q-2 - 18W 		L597608	Luceri 220 screen housing/reflector	2 x 18W FLU/EB	5.9 lbs. / 2.69kg				
T4/G24q-3 - 26W 		L597708	Luceri 220 screen housing/reflector	2 x 26W FLU/EB	5.9 lbs. / 2.69kg				

LUCERI 220 TRIM OPTIONS

	Die-cast trim with open aperture	
	L597528	White
	L597578	Nickel matte
	L597598	Chrome
	L599908 Anti-dazzle cross-blade louver, use with open aperture trims only	
	Die-cast trim with frosted glass lens	
	L597328	White
	L597398	Chrome


	Plastic trim with transparent glass lens	
	L599828	White
	L599878	Nickel matte
	L599898	Chrome
	Plastic trim with silk screened glass lens	
	L599728	White
	L599778	Nickel matte
	Die-cast trim with concentric pattern thermoplastic lens	
	L597228	

Artemide[®]
ARCHITECTURAL


NOTHING



- created with the purpose of making the lighting fixture disappear completely into the ceiling as to solely draw attention to the lighting effects, Nothing is a complete range of recessed luminaires for AR111/12V halogen or HSR111 metal halide lamps
- the recessing enclosure, made of extruded aluminum, is specially designed to ensure its retention in the plaster ceiling
- 2 types: single square or rectangular shape
- 5 models are available: Nothing square with 1 or 4 lamps and Nothing rectangular with 2, 3, or 4 lamps
- each spotlight may be adjusted individually with a tilt ranging from -20° to $+70^{\circ}$ and rotation of up to 355°
- recommended installation: to be set back 3 feet from the vertical surface to be illuminated
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballasts
- for 277/347V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative

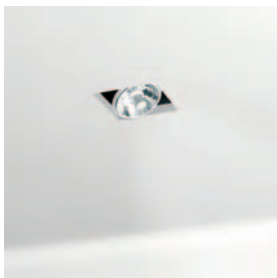

NOTHING SQUARE
1 LAMP
AR111 (G53)
HSR111 (GX8.5)

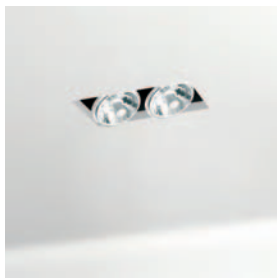

NOTHING RECTANGULAR
2 LAMPS
AR111 (G53)
HSR111 (GX8.5)



NOTHING RECTANGULAR
3 LAMPS
AR111 (G53)
HSR111 (GX8.5)




NOTHING RECTANGULAR
4 LAMPS
AR111 (G53)
HSR111 (GX8.5)



NOTHING SQUARE
4 LAMPS
AR111 (G53)
HSR111 (GX8.5)




SHOWROOM BANG & OLUFSEN, MILAN (I), SANDRO MARINI E ILARIO PESCO


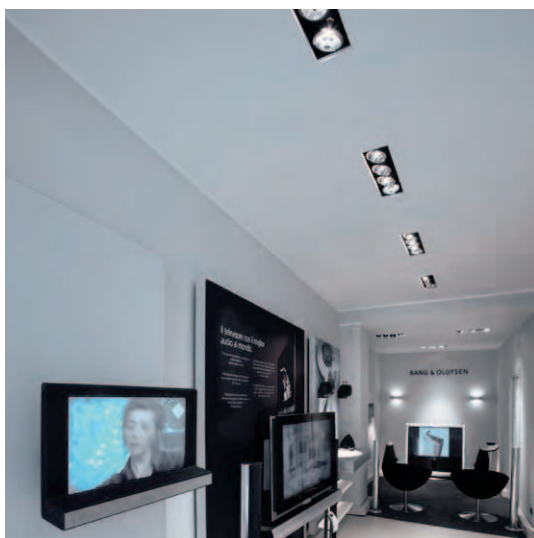


SHOWROOM ETRO, MILAN (I), ALBERTO BRUGI & ELIO MESSI
ARCHITETTI ASSOCIATI


NOTHING SQUARE SINGLE RECESSED

	 Side view dimensions: 5 7/16" (138mm) width, 8 1/16" (205mm) height. Top view dimensions: 7 15/16" (202mm) width, 7 15/16" (202mm) depth.	cut-out dimension  6 11/16" x 6 11/16" 170mm x 170mm spot tilt/rotation 									
AR111/G53 - 50W  HSR111/GX8.5 - 35W 	<table> <thead> <tr> <th>CODE</th><th>DESCRIPTION</th><th>WEIGHT</th></tr> </thead> <tbody> <tr> <td>M069028</td><td>Nothing square single recessed 8 x 8 1 x 50W AR111 HAL/EB</td><td>2.0 lbs. / 0.89kg</td></tr> <tr> <td>M069058</td><td>Nothing square single recessed 8 x 8 1 x 35W HSR111 MH/EB</td><td>2.0 lbs. / 0.89kg</td></tr> </tbody> </table>	CODE	DESCRIPTION	WEIGHT	M069028	Nothing square single recessed 8 x 8 1 x 50W AR111 HAL/EB	2.0 lbs. / 0.89kg	M069058	Nothing square single recessed 8 x 8 1 x 35W HSR111 MH/EB	2.0 lbs. / 0.89kg	
CODE	DESCRIPTION	WEIGHT									
M069028	Nothing square single recessed 8 x 8 1 x 50W AR111 HAL/EB	2.0 lbs. / 0.89kg									
M069058	Nothing square single recessed 8 x 8 1 x 35W HSR111 MH/EB	2.0 lbs. / 0.89kg									




NOTHING RECTANGULAR DOUBLE RECESSED

	 Side view dimensions: 10 3/8" (263mm) width, 8 1/16" (205mm) height. Top view dimensions: 12 7/8" (327mm) width, 7 15/16" (202mm) depth.	cut-out dimension  6 11/16" x 11 5/8" 170mm x 295mm spot tilt/rotation 									
AR111/G53 - 50W  HSR111/GX8.5 - 35W 	<table> <thead> <tr> <th>CODE</th><th>DESCRIPTION</th><th>WEIGHT</th></tr> </thead> <tbody> <tr> <td>M069128</td><td>Nothing rectangular double recessed 8 x 12 2 x 50W AR111 HAL/EB</td><td>3.5 lbs. / 1.58kg</td></tr> <tr> <td>M069158</td><td>Nothing rectangular double recessed 8 x 12 2 x 35W HSR111 MH/EB</td><td>3.5 lbs. / 1.58kg</td></tr> </tbody> </table>	CODE	DESCRIPTION	WEIGHT	M069128	Nothing rectangular double recessed 8 x 12 2 x 50W AR111 HAL/EB	3.5 lbs. / 1.58kg	M069158	Nothing rectangular double recessed 8 x 12 2 x 35W HSR111 MH/EB	3.5 lbs. / 1.58kg	
CODE	DESCRIPTION	WEIGHT									
M069128	Nothing rectangular double recessed 8 x 12 2 x 50W AR111 HAL/EB	3.5 lbs. / 1.58kg									
M069158	Nothing rectangular double recessed 8 x 12 2 x 35W HSR111 MH/EB	3.5 lbs. / 1.58kg									


NOTHING RECTANGULAR TRIPLE RECESSED

	 Side view dimensions: 15 1/4" (388mm) width, 8 1/16" (205mm) height. Top view dimensions: 17 13/16" (452mm) width, 7 15/16" (202mm) depth.	cut-out dimension  6 11/16" x 16 9/16" 170mm x 420mm spot tilt/rotation 									
AR111/G53 - 50W  HSR111/GX8.5 - 35W 	<table> <thead> <tr> <th>CODE</th><th>DESCRIPTION</th><th>WEIGHT</th></tr> </thead> <tbody> <tr> <td>M069228</td><td>Nothing rectangular triple recessed 8 x 18 3 x 50W AR111 HAL/EB</td><td>4.7 lbs. / 2.15kg</td></tr> <tr> <td>M069258</td><td>Nothing rectangular triple recessed 8 x 18 3 x 35W HSR111 MH/EB</td><td>4.7 lbs. / 2.15kg</td></tr> </tbody> </table>	CODE	DESCRIPTION	WEIGHT	M069228	Nothing rectangular triple recessed 8 x 18 3 x 50W AR111 HAL/EB	4.7 lbs. / 2.15kg	M069258	Nothing rectangular triple recessed 8 x 18 3 x 35W HSR111 MH/EB	4.7 lbs. / 2.15kg	
CODE	DESCRIPTION	WEIGHT									
M069228	Nothing rectangular triple recessed 8 x 18 3 x 50W AR111 HAL/EB	4.7 lbs. / 2.15kg									
M069258	Nothing rectangular triple recessed 8 x 18 3 x 35W HSR111 MH/EB	4.7 lbs. / 2.15kg									


NOTHING RECTANGULAR QUADRUPLE RECESSED

									
	20 3/16" 513mm	8 1/16" 205mm	22 11/16" 577mm	10 3/8" 263mm	7 15/16" 202mm				
	AR111/G53 - 50W		CODE	DESCRIPTION	WEIGHT				
	HSR111/GX8.5 - 35W		M069328	Nothing rectangular quadruple recessed 8 x 22 4 x 50W AR111 HAL/EB	5.9 lbs. / 2.70kg				
			M069358	Nothing rectangular quadruple recessed 8 x 22 4 x 35W HSR111 MH/EB	5.9 lbs. / 2.70kg				

NOTHING SQUARE QUADRUPLE RECESSED


								cut-out dimension  11 5/8" / 11 5/8" 295mm x 295mm spot tilt/rotation  20° 70° 350°
	10 3/8" 263mm	8 1/16" 205mm	12 7/8" 327mm	10 3/8" 263mm	12 7/8" 327mm			
AR111/G53 - 50W 	CODE	DESCRIPTION				WEIGHT		
	M069428	Nothing square quadruple recessed 12 x 12 4 x 50W AR111 HAL/EB				5.3 lbs. / 2.40kg		
HSR111/GX8.5 - 35W 	M069458	Nothing square quadruple recessed 12 x 12 4 x 35W HSR111 MH/EB				5.3 lbs. / 2.40kg		

NOTHING MINIMUM CLEARANCE ABOVE CEILING

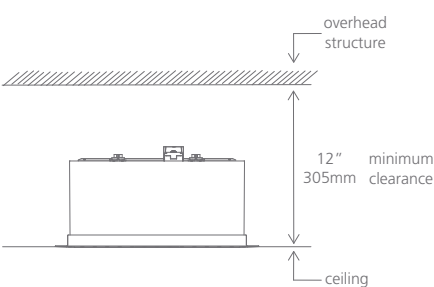

NOTHING SPACIAL CRITERIA

By design this fixture is intended to be discreet, in order to achieve this there must be clearance for components inside ceiling cavity.

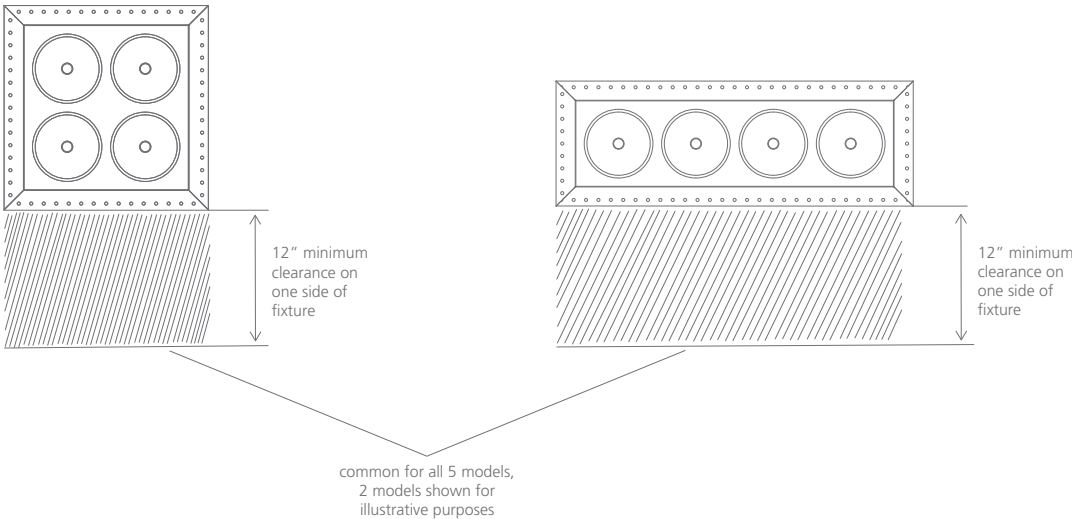

JANO



- created with the purpose of making the lighting fixture elegantly blend into the ceiling as to focus attention to the lighting effects, Jano is a complete range of recessed luminaires for AR111/12V halogen or HSR111 metal halide lamps
- the recessed enclosure is made of extruded aluminum with a low profile frame in aluminum grey lacquered finish
- 2 types: single square or rectangular shape
- 5 models are available: Jano square with 1 or 4 lamps and Jano rectangular with 2, 3, or 4 lamps
- each spotlight may be adjusted individually with a tilt ranging from -20° to +70° and rotation of up to 355°
- recommended installation: to be set back 3 feet from the vertical surface to be illuminated
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballasts
- for 277/347V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative



JANO SQUARE
1 LAMP
AR111 (G53)
HSR111 (GX8.5)



JANO RECTANGULAR
2 LAMPS
AR111 (G53)
HSR111 (GX8.5)



JANO RECTANGULAR
3 LAMPS
AR111 (G53)
HSR111 (GX8.5)



JANO RECTANGULAR
4 LAMPS
AR111 (G53)
HSR111 (GX8.5)






JANO SQUARE
4 LAMPS
AR111 (G53)
HSR111 (GX8.5)





WHITE STAR ADVENTURE, MILANO (I), CARLA CELESTINO



JANO SQUARE SINGLE RECESSED

	 6 1/2" 165mm 7 1/16" 180mm			 7 1/16" 180mm			cut-out dimension  6 1/4" x 6 1/4" 158mm x 158mm		
	 spot tilt/rotation 20° 70° 350°								
 grey (standard)									
CODE		DESCRIPTION			WEIGHT				
AR111/G53 - 50W 		M049268 Jano square single recessed 8 x 8 1 x 50W AR111 HAL/EB			2.6 lbs. / 1.20kg				
HSR111/GX8.5 - 35W 		M049258 Jano square single recessed 8 x 8 1 x 35W HSR111 MH/EB			2.6 lbs. / 1.20kg				

JANO RECTANGULAR DOUBLE RECESSED



	 6 1/2" 165mm 12" 305mm		 7 1/16" 180mm 12" 305mm		cut-out dimension  6 1/4" x 11 1/8" 158mm x 283mm
			spot tilt/rotation  20° 70° 350°		
grey (standard)					
AR111/G53 - 50W 					
HSR111/GX8.5 - 35W 					

JANO RECTANGULAR TRIPLE RECESSED

					cut-out dimension  6 1/4" x 16 1/16" 158mm x 408mm	
					spot tilt/rotation 	
● grey (standard)						
AR111/G53 - 50W 		CODE		DESCRIPTION		WEIGHT
HSR111/GX8.5 - 35W 		M049468		Jano rectangular triple recessed 8 x 18 3 x 50W AR111 HAL/EB		5.6 lbs. / 2.54kg
		M049458		Jano rectangular triple recessed 8 x 18 3 x 35W HSR111 MH/EB		5.6 lbs. / 2.54kg


JANO RECTANGULAR QUADRUPLE RECESSED





cut-out dimension 

6 1/4" x 21"
158mm x 533mm

spot tilt/rotation 



20°
70°
350°

grey (standard)

CODE	DESCRIPTION	WEIGHT
M049568	Jano rectangular quadruple recessed 8 x 22 4 x 50W AR111 HAL/EB	7 lbs. / 3.17kg
M049558	Jano rectangular quadruple recessed 8 x 22 4 x 35W HSR111 MH/EB	7 lbs. / 3.17kg


JANO SQUARE QUADRUPLE RECESSED





cut-out dimension 

11 1/8" / 11 1/8"
283mm x 283mm


spot tilt/rotation 

20°
70°
350°

grey (standard)


CODE	DESCRIPTION	WEIGHT
M069428	Jano square quadruple recessed 12 x 12 4 x 50W AR111 HAL/EB	6.3 lbs. / 2.87kg
M069458	Jano square quadruple recessed 12 x 12 4 x 35W HSR111 MH/EB	6.3 lbs. / 2.87kg

JANO MINIMUM CLEARANCE ABOVE CEILING

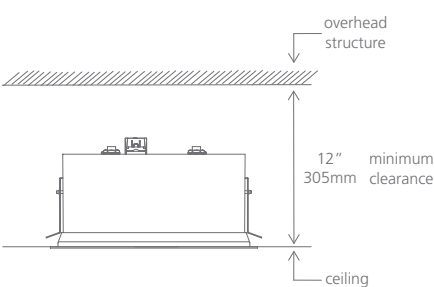

JANO SPACIAL CRITERIA

By design this fixture is intended to be discreet, in order to achieve this there must be clearance for components inside ceiling cavity.

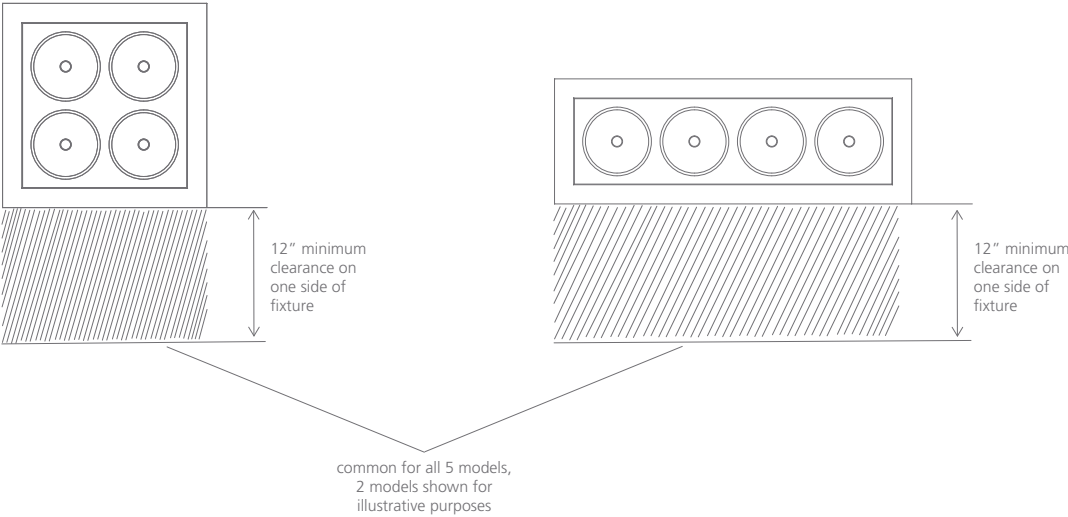


L.D. 96



- recessed ceiling downlight luminaire for direct low voltage halogen lighting
- trim in die-cast aluminum with white lacquered finish, chromed, or brushed nickel finish
- recessed housing in galvanized steel construction with incorporated low voltage 120/12V transformer (277/12V optional)
- recessed housing type to be selected from:
 - "new construction"
 - "insulated ceiling"
 - "remodeling"
 - "air tight"
- ceiling cut-out dimension: $\varnothing 3 \frac{1}{2}"$

refer to page 22 for recessed housing options

STILWERK, DÜSSELDORF (D)

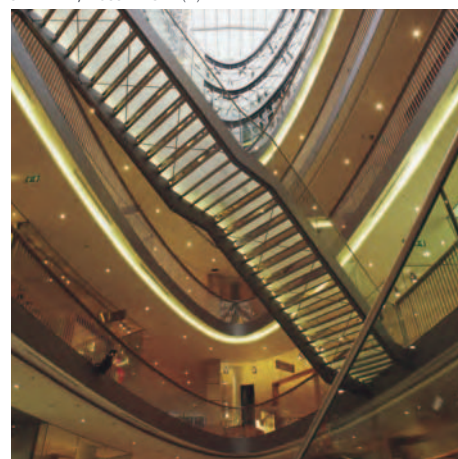

L.D. 96 RECESSED

 ø 4" ø 100mm	cut out  ø 3 1/2" ø 89mm x=  white 2  chrome 9  matte nickel 7								
MR16/GU5.3 	<table><tr><th>CODE</th><th>DESCRIPTION</th><th>WEIGHT</th></tr><tr><td>6004x8</td><td>L.D. 96 recessed trim</td><td>1.0 lb. / 0.45kg</td></tr></table>			CODE	DESCRIPTION	WEIGHT	6004x8	L.D. 96 recessed trim	1.0 lb. / 0.45kg
	CODE	DESCRIPTION	WEIGHT						
6004x8	L.D. 96 recessed trim	1.0 lb. / 0.45kg							

AYRTON 98




- recessed ceiling downlight luminaire for directional low voltage halogen spotlighting
- body in die-cast aluminum with 355° rotation and max 35° adjustable angle with white lacquered finish or chromed finish
- recessed housing in galvanized steel construction with incorporated low voltage 120/12V transformer (277/12V optional)
- recessed housing type to be selected from:
 - "new construction"
 - "insulated ceiling"
 - "remodeling"
 - "air tight"
- ceiling cut-out dimension: $\varnothing 3 \frac{1}{2}"$

refer to page 22 for recessed housing options

BMW, SAN DONATO MILANESE (I), KENZO TANGE



AYRTON 98 RECESSED

	cut out  $\varnothing 3 \frac{1}{2}"$ $\varnothing 89\text{mm}$ spot tilt/rotation  35°  355° x=  white 2  chrome 9		
MR16/GU5.3 	CODE	DESCRIPTION	WEIGHT
	6135x8	Ayrton 98 recessed trim	1.0 lb. / 0.45kg


CRONOCOLOR




- recessed ceiling downlight luminaires for direct and diffused, low voltage halogen lighting
- trim/support ring in injection molded aluminum with chrome finish, with attached diffuser in internally sanded glass in white, blue, peach, or aquamarine
- recessed housing in galvanized steel construction with incorporated low voltage 120/12V transformer (277/12V optional)
- recessed housing type to be selected from:
 - "new construction"
 - "insulated ceiling"
 - "remodeling"
 - "air tight"
- ceiling cut-out dimension: $\varnothing 3 \frac{1}{2}"$

refer to page 22 for recessed housing options


CRONOCOLOR MEDEA RECESSED

	 1 1/8" 30mm ø 3 1/2" ø 90mm
	645158 Blue glass
	645258 Peach glass
	645358 Aquamarine glass
	645458 White glass

CRONOCOLOR CABIRI RECESSED

	 3" 75mm ø 4" ø 100mm
	645958 Blue glass
	646058 Peach glass
	646158 Aquamarine glass
	646258 White glass


CRONOCOLOR ERILO RECESSED

	 3" 75mm ø 4" ø 100mm
	646758 Blue glass
	646858 Peach glass
	646958 Aquamarine glass
	647058 White glass


CRONOCOLOR KALIAS RECESSED

	 3 1/2" 90mm ø 4 1/4" ø 108mm
	041518 Blue glass
	041538 Peach glass
	041528 Aquamarine glass
	041508 White glass

CRONOCOLOR TILOS RECESSED

	 3 1/2" 90mm ø 6" ø 152mm
	041618 Blue glass
	041638 Peach glass
	041628 Aquamarine glass
	041608 White glass


RECESSED HOUSING / NEW CONSTRUCTION



● galvanized steel (standard)

CODE	DESCRIPTION	WEIGHT
NC1001	RH/NC (new construction) / 120V 1 x 50W/12V max HAL	4.5 lbs. / 2.04kg
NC1002	RH/NC (new construction) / 277V 1 x 50W/12V max HAL	4.5 lbs. / 2.04kg
<i>incorporated 120/12V or 277/12V magnetic thermally protected transformer • adjustable mounting arms</i>		
<i>suitable for mounting to 16" - 24" on-center joist construction</i>		


RECESSED HOUSING / REMODELING



● galvanized steel (standard)

CODE	DESCRIPTION	WEIGHT
RE2001	RH/RE (remodeling) / 120V 1 x 50W/12V max HAL	3 lbs. / 1.36kg
RE2002	RH/RE (remodeling) / 277V 1 x 50W/12V max HAL	3 lbs. / 1.36kg
<i>incorporated 120/12V or 277/12V magnetic thermally protected transformer • clamp mounting directly</i>		
<i>to drywall ceiling surface</i>		


RECESSED HOUSING / INSULATED CEILING

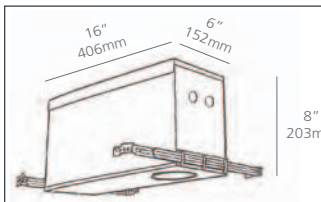

● galvanized steel (standard)

CODE	DESCRIPTION	WEIGHT
IC3001	RH/IC (insulated ceiling) / 120V 1 x 35W/12V max HAL	8 lbs. / 3.64kg
IC3002	RH/IC (insulated ceiling) / 277V 1 x 35W/12V max HAL	8 lbs. / 3.64kg
<i>incorporated 120/12V or 277/12V magnetic thermally protected transformer • adjustable mounting arms</i>		
<i>suitable for mounting to 16" - 24" on-center joist construction</i>		

RECESSED HOUSING / AIR TIGHT

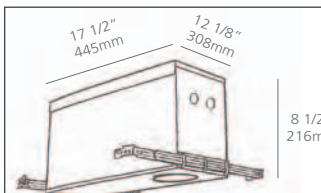

● galvanized steel (standard)

CODE	DESCRIPTION	WEIGHT
AT4001	RH/AT (air tight) / 120V 1 x 50W/12V max HAL	10.2 lbs. / 4.62kg
AT4002	RH/AT (air tight) / 277V 1 x 50W/12V max HAL	10.2 lbs. / 4.62kg
<i>incorporated 120/12V or 277/12V magnetic thermally protected transformer • adjustable mounting arms</i>		
<i>suitable for mounting to 16" - 24" on-center joist construction</i>		

suitable for recessed models: cronocolor series, l.d. 96, and ayrton 98





Artemide[®]
ARCHITECTURAL

For more information please contact:
USA: 1-877-Art-9111 or online at artemide.us
Canada: 1-888-777-Arte or online at artemide.ca