

Acorn Pendants



RIP1124
Antique Brass

RIP1140
Antique Brass

24" 32"

Traditional Trim



RIP1132
Antique Brass



RIP1148
Antique Brass

Acorn Pendants-24"

RENAISSANCE


24"

Specifications:


- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.


Traditional Trim




RIP1122



RIP1130



RIP1138




RIP1146

(47") Overall Height of fixture with metal halide lamping.



A, D, E
Symmetrical
Indirect

Sample model number: **RIP1122 - 2F39/1F39 - 120 - BAL - HP02**

Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg. Photometry	Select Voltage	Select Finish	Select Options	
TRADITIONAL RIP1122 RIP1130 RIP1138 RIP1146	1M100PSC/1F40	100W ED17 PULSE START CERAMIC MH - 40W CIRC T5	A E402-17	120 277	PT Painted. (Include Paint Number.)	OAH Pendant length other than standard. (Provide fixture height in inches.)	
	1M150PSC/1F40	150W ED17 PULSE START CERAMIC MH - 40W CIRC T5	A E402-17		PBR Polished solid brass	F Fuse option (M and F)	
	1M250/1F40	250W BT28 MH - 40W CIRC T5	A E402-17		BBR Brushed solid brass	RPI Remote ballast support tray	
	1M250PS/1F40	250W ED28 PULSE START MH - 40W CIRC T5	A E402-17		ABR Antique solid brass	EMI ¹ Emergency ballast(s) integral	
	1M350PS/1F40	350W ED28 PULSE START MH - 40W CIRC T5	A E402-17		CPBR Chrome plated polished brass	EMR Emergency ballast(s) remote	
	1M400/1F40	400W BT28 MH - 40W CIRC T5	A E402-17		BAL Brushed aluminum	SBA Sandblasted acrylic	
	1M400PS/1F40	400W BT28 PULSE START MH - 40W CIRC T5	A E402-17		ABST Antique brass over steel	SAV Traditional ballast canopy	
	1N300	300W PS30 INC	B NA		BBST Brushed brass over steel	SS Separate switching	
	2T250	(2) 250W T10 QTZ	C E433-75R		CPST Polished chrome over steel	HP01 Silver hand-painted acrylic	
	2F39/1F39 ¹	(2) FT39W/2G11 - FT39W/2G11	D E433-71		PBST Polished brass over steel	HP02 Beige hand-painted acrylic	
	2F39DM/1F39DM ¹	(2) FT39W/2G11 - FT39W/2G11	D E433-71		<i>See Finish Selection Guide, pages 268-269.</i>		HP03 Amber hand-painted acrylic
	4F32/1F22	(4) CFTR32W/GX24q - 22W CIRC T5	E E402-20			FIN Finial option	
	4F42/1F22	(4) CFTR42W/GX24q - 22W CIRC T5	E E402-20				


DM = Dimming ballast(s) provided

¹Denotes lamping options available with **EMI**

If Photometry is not available, consult factory for further details.

For further detail on options, see Technical Notes on page 264.

OPTICAL PACKAGES

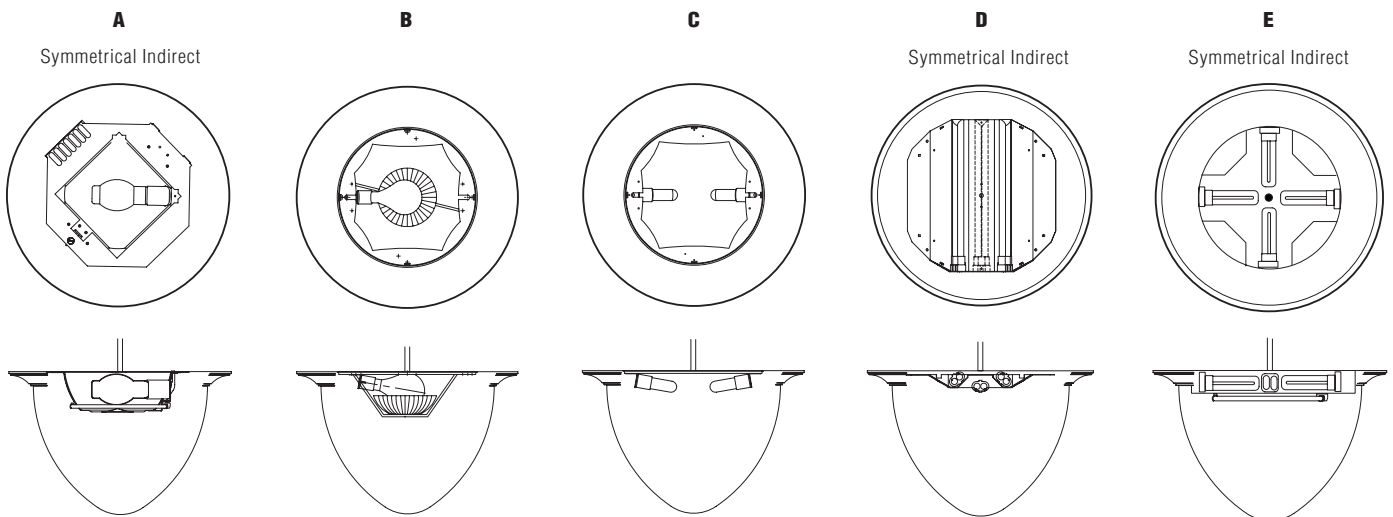

Acorn Pendants-32"

RENAISSANCE


32"

Specifications:


- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.


Traditional Trim




RIP1124




RIP1132




RIP1140




RIP1148



A, C, D
Symmetrical
Indirect




E
Wide
Indirect



F
Symmetrical
Direct

Sample model number: **RIP1124 - 6F39/1F22 - 120 - BAL - HPO2**

Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg. Photometry	Select Voltage	Select Finish	Select Options	
TRADITIONAL RIP1124 RIP1132 RIP1140 RIP1148	1M100PS/1F40	100W ED17 PULSE START MH - 40W CIRC T5	A E402-17	120 277	PT Painted. (Include Paint Number.)	OAH Pendant length other than standard. (Provide fixture height in inches.)	
	1M150PSC/1F40	150W ED17 PULSE START CERAMIC MH - 40W CIRC T5	A E402-17		PBR Polished solid brass	F Fuse option (M and F)	
	1M250/1F40	250W BT28 MH - 40W CIRC T5	A E402-17		BBR Brushed solid brass	RPI Remote ballast support tray	
	1M250PS/1F40	250W ED28 PULSE START MH - 40W CIRC T5	A E402-17		ABR Antique solid brass	EMI ¹ Emergency ballast(s) integral	
	1M350PS/1F40	350W ED28 PULSE START MH - 40W CIRC T5	A E402-17		CPBR Chrome plated polished brass	EMR Emergency ballast(s) remote	
	1M400/1F40	400W BT28 MH - 40W CIRC T5	A E402-17		BAL Brushed aluminum	SBA Sandblasted acrylic	
	1M400PS/1F40	400W BT28 PULSE START MH - 40W CIRC T5	A E402-17		ABST Antique brass over steel	SAV Traditional ballast canopy	
	3N150	(3) 150W A21 INC	B NA		BBST Brushed brass over steel	SS Separate switching	
	3T250	(3) 250W T10 QTZ	B NA		CPST Polished chrome over steel	HPO1 Silver hand-painted acrylic	
	4F40DM/2F40¹	(4) FT40W/2G11 - (2) FT40W/2G11	C E433-72		PBST Polished brass over steel	HPO2 Beige hand-painted acrylic	
	4F40/2F40¹	(4) FT40W/2G11 - (2) FT40W/2G11	C E433-72		<i>See Finish Selection Guide, pages 268-269.</i>		HPO3 Amber hand-painted acrylic
	6F40/1F40¹	(6) FT40W/2G11 - 40W CIRC T5	D E433-87		FIN Finial option (Standard with E optical package)	 Traditional	
	6F40DM/1F40¹	(6) FT40W/2G11 - 40W CIRC T5	D E433-87		<i>For further detail on options, see Technical Notes on page 264.</i>		
	6F55/1F40¹	(6) FT55W/2G11 - 40W CIRC T5	D E433-87				
	6F39/1F22¹	(6) FT39W/2G11 - 22W CIRC T5	E NA				
	6F39DM/1F22¹	(6) FT39W/2G11 - 22W CIRC T5	E NA				
3F39-3F40/1F22¹	(3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5	E NA					
3F39DM-3F40DM/1F22¹	(3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5	E NA					
3F39-3F55/1F22	(3) FT39W/2G11 - (3) FT55W/2G11 - 22W CIRC T5	E NA					
2F40/4F40	(2) FT40W/2G11 - (4) FT40W/2G11	F ITL3691A					

DM = Dimming ballast(s) provided

If Photometry is not available,
consult factory for further details.

¹Denotes lamping options available with EMI

OPTICAL PACKAGES

