

Acorn Arm Sconce & Sconce



RIW1130
Antique Brass

16" 24"

Traditional Trim



RIC1030
Antique Brass

Acorn Arm Sconce

RENAISSANCE

16"


24"

Specifications:


- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Wall plate fits over standard junction box and is mounted to wall surface.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.

Traditional Trim

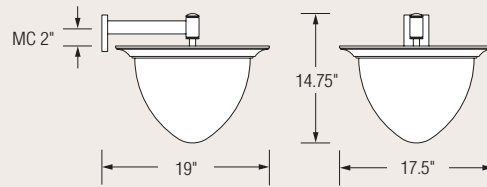


RIW1130

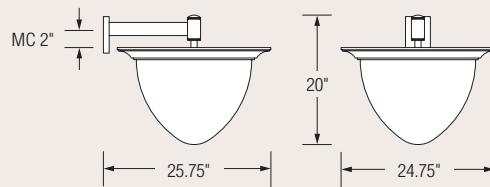



RIW1132

MC = Mounting Center



C, F, G
Symmetrical
Indirect

Sample model number: **RIW1132** - **2F39/1F39** - **120** - **BAL** - **HP02**

Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg. Photometry	Select Voltage	Select Finish	Select Options
16" RIW1130	1M100PSC	100W ED17 PULSE START CERAMIC MH	A E402-18R	120 277	PT Painted. (Include Paint Number.) PBR Polished solid brass BBR Brushed solid brass ABR Antique solid brass CPBR Chrome plated polished brass BAL Brushed aluminum ABST Antique brass over steel BBST Brushed brass over steel CPST Polished chrome over steel PBST Polished brass over steel <i>See Finish Selection Guide, pages 268-269.</i>	F Fuse option (M and F) RPI Remote ballast support tray EMI ¹ Emergency ballast(s) integral EMR Emergency ballast(s) remote SBA Sandblasted acrylic SS Separate switching HP01 Silver hand-painted acrylic HP02 Beige hand-painted acrylic HP03 Amber hand-painted acrylic FIN Finial option  Traditional
	1N100	100W A19 INC	A NA			
	2F26	(2) CFQ26W/G24q	B E402-19			
	2F32	(2) CFTR32W/GX24q	B E402-19			
	2F42	(2) CFTR42W/GX24q	B E402-19			
24" RIW1132	1M100PSC/1F40	100W ED17 PULSE START CERAMIC MH - 40W CIRC T5	C E402-17	See Finish Selection Guide, pages 268-269.	F Fuse option (M and F) RPI Remote ballast support tray EMI ¹ Emergency ballast(s) integral EMR Emergency ballast(s) remote SBA Sandblasted acrylic SS Separate switching HP01 Silver hand-painted acrylic HP02 Beige hand-painted acrylic HP03 Amber hand-painted acrylic FIN Finial option  Traditional	
	1M150PSC/1F40	150W ED17 PULSE START CERAMIC MH - 40W CIRC T5	C E402-17			
	1M250/1F40	250W BT28 MH - 40W CIRC T5	C E402-17			
	1M250PS/1F40	250W ED28 PULSE START MH - 40W CIRC T5	C E402-17			
	1M350PS/1F40	350W ED28 PULSE START MH - 40W CIRC T5	C E402-17			
	1M400/1F40	400W BT28 MH - 40W CIRC T5	C E402-17			
	1M400PS/1F40	400W ED28 PULSE START MH - 40W CIRC T5	C E402-17			
	1N300	300W PS30 INC	D NA			
	2T250	(2) 250W T10 QTZ	E E433-75R			
	2F39/1F39 ¹	(2) FT39W/2G11 - FT39W/2G11	F E433-71			
	2F39DM/1F39 ¹	(2) FT39W/2G11 - FT39W/2G11	F E433-71			
	4F32/1F22	(4) CFTR32W/GX24q - 22W CIRC T5	G E402-20			
	4F42/1F22	(4) CFTR42W/GX24q - 22W CIRC T5	G E402-20			

DM = Dimming ballast(s) provided

If Photometry is not available,
consult factory for further details.

¹Denotes lamping options available with EMI

OPTICAL PACKAGES

